

BullsEye NFC Wet Inlay


ISO/IEC 18092

Sony FeliCa Lite-S

Sales code 3003103

Mechanical dimensions

A	Antenna size	35 mm	± 0,5 mm	1,378 in
B	Die-cut size	38 mm	± 0,2 mm	1,496 in
C	Web width	41 mm	± 0,5 mm	1,614 in
D	Pitch, length per piece MD	42 mm	± 1,5 mm	1,654 in
E	Die-cut to web edge	1,5 mm	± 1,5 mm	0,059 in
F	Die-cut to register mark	0,5 mm	± 1,0 mm	0,020 in
H	Antenna to die-cut (CD)	1,5 mm	± 1,5 mm	0,059 in
	Thickness of the IC	120 µm	± 10 %	
	Overall thickness of the transponder package (excluding IC and siliconized paper)	141 µm	± 10 %	

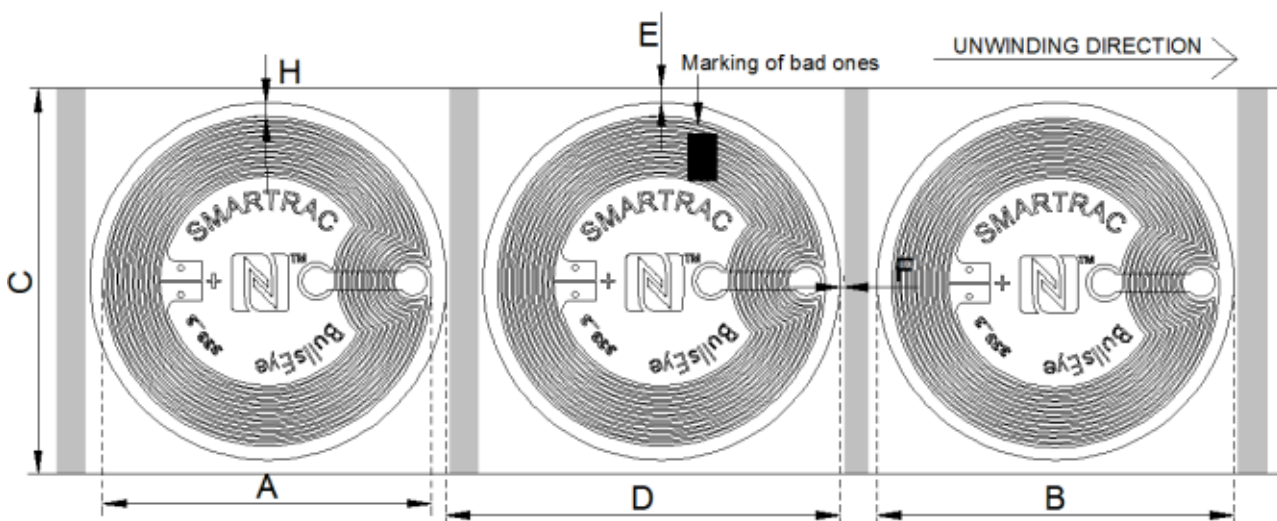

Electrical characteristics

Integrated Circuit (IC)	Sony FeliCa Lite-S
Air interface protocol	ISO/IEC 18092
Operation frequency	13,56 MHz
Unloaded resonance frequency	14,07 MHz ± 0,50 MHz
Memory	224 bytes user memory


General characteristics of transponder

Operating temperature (electronics parts)	-25 °C / +85 °C	-13 °F / 185 °F
ESD voltage immunity	± 2 kV peak HBM	
Shelf life: From the date of manufacture 2 years in	+20 °C, 50 % RH	68 °F, 50 % RH
Bending diameter (D)	> 50 mm, tension less than 10 N	

Delivery form

Transponder format	Die-cut	
Transponder face material	Clear PET 12	
Transponder backing material	Siliconized Paper 56	
Transponder antenna material	Aluminum	
Transponder adhesive	RA-2	
- labelling temperature	min. +5 °C	min. +41 °F
- usage temperature	-40°C - 150 °C	-40°F - 302 °F
- peel	min. 15 N / 25 mm (FTM 1)	
Final inspection	100 %, known faulty ones marked	
Transponder encoding	NDEF initialized	
Minimum delivery yield	95 %	
Reel Label	Reel number, Material number, Material description, Yield, Qty of functional inlays, Qty of non-functional inlays, Date	
Printability	Needs to be tested by customer	

Structure

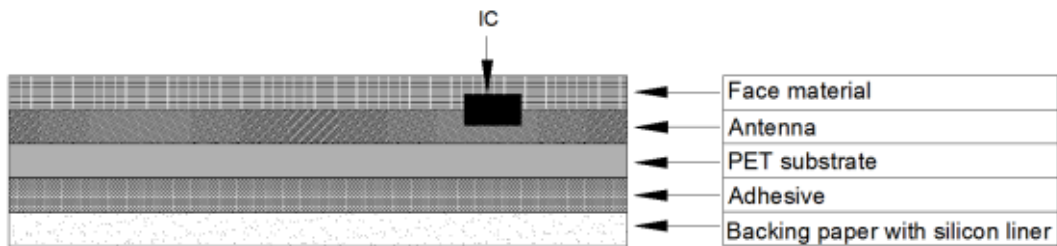

Delivery details

Appearance	Single row reel form
Reel core	Paper core inner diameter 76 mm (3 in)
Transponder alignment	Chip at rear of transponder
Winding of the reel	Face out
Reel size	4000 pcs/reel Diameter: < 205 mm
Package size	16000 pcs/box Deliveries only in full packages.

Disclaimer:

SMARTRAC reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used outside our control we cannot take responsibility for any damage that may be caused when using the product. Use extra care in handling the product.

This technical specification replaces all earlier ones.

Version	2
Update date	9 July 2014
Author	SMARTRAC / k731743
Approved	SMARTRAC / 10.7.2014 Mervi Väisänen/Smarttrac

