

MiniBlock Wet Inlay


ISO 15 693, ISO 18 000-3 Mode 1

NXP ICode SLIX2

Sales code 3005860

Mechanical dimensions

A1 x A2	Antenna size	14,5 x 14,5 mm	± 0,5 mm	0,571 x 0,571 in
B1 x B2	Die-cut size	18 x 18 mm	± 0,2 mm	0,709 x 0,709 in
C	Web Width	24 mm	± 0,5 mm	0,945 in
D	Pitch, length per piece MD	22 mm	± 1,5 mm	0,866 in
E	Die-cut to web edge	3 mm	± 1,5 mm	0,118 in
U	Die-cut corner radius	1 mm		0,039 in
	Thickness of the IC	127 µm	± 15 %	
	Overall thickness of transponder package (excluding IC and siliconized paper)	134 µm	± 10 %	
	Thickness of the siliconized paper	56 µm	± 5 %	
	Marking of bad ones	5 x 3 mm		0,197 x 0,118 in

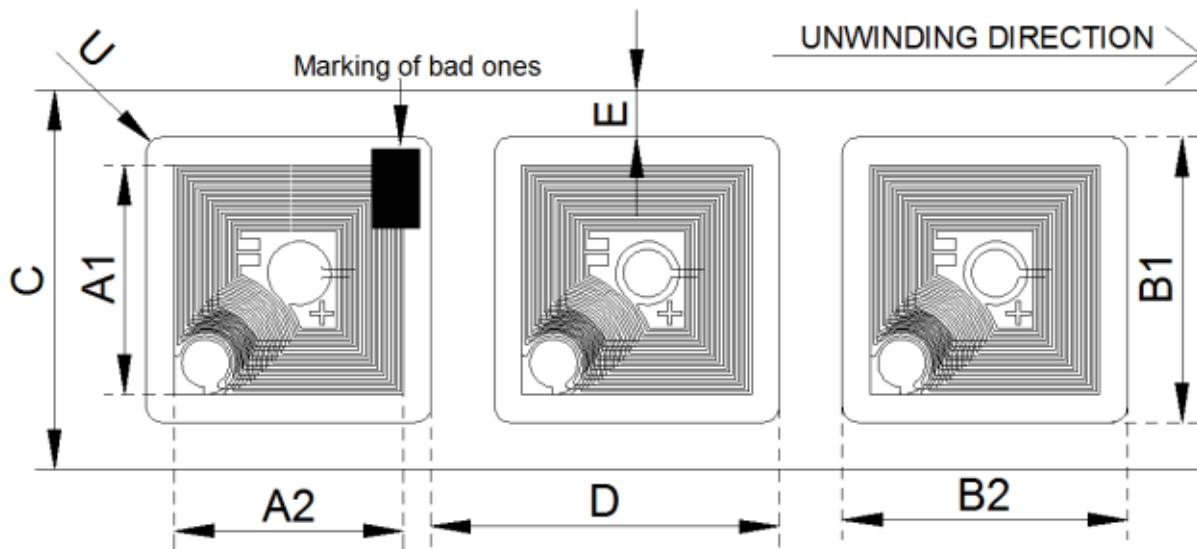

Electrical characteristics

Integrated Circuit (IC)	NXP ICode SLIX2
Air interface protocol	ISO 15 693, ISO 18 000-3 Mode 1
Operation frequency	13,56 MHz
Unloaded resonance frequency	TBD
Memory	2.5k bits user memory


General characteristics of transponder

Operating temperature (electronics parts)	-40 °C / +85 °C	-40 °F / 185 °F
ESD voltage immunity	± 2 kV peak HBM	
Shelf life: From the date of manufacture 2 years in	+20 °C, 50 % RH	68 °F, 50 % RH
Bending diameter (D)	> 50 mm, tension less than 10 N	

Delivery form

Transponder format	Die-cut	
Transponder face material	Clear PET 12	
Transponder backing material	Siliconized Paper 56	
Transponder antenna material	Aluminum, crimped coil	
Transponder adhesive	RA-4	
- labelling temperature	min. +5 °C	min. 41 °F
- usage temperature	-10 °C - 90 °C	14 °F - 194 °F
- peel	min. 19 N / 25 mm (FTM 1)	
Final inspection	100 %, known faulty ones marked	
Minimum delivery yield	95 %	
Reel Label	Reel number, Material number, Material description, Yield, Qty of functional inlays, Qty of non-functional inlays, Date	
Printability	Needs to be tested by customer	

Structure

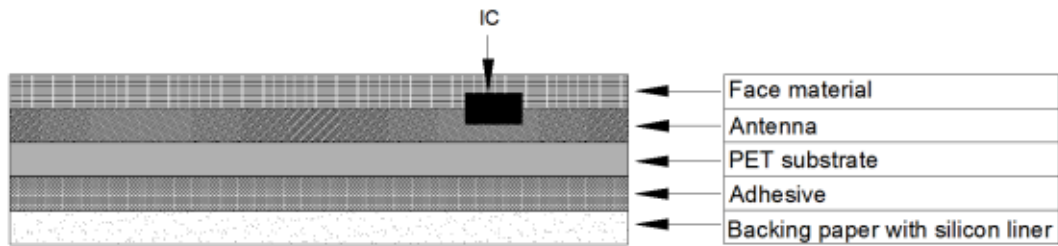

Delivery details

Appearance	Single row reel form
Reel core	Paper core inner diameter 76 mm (3 in)
Transponder alignment	Chip at rear of transponder
Winding of the reel	Face out
Reel size	4000 pcs/reel
Package size	12000 pcs/box Deliveries only in full packages.

Disclaimer:

SMARTRAC reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used outside our control we cannot take responsibility for any damage that may be caused when using the product. Use extra care in handling the product.

This technical specification replaces all earlier ones.

Version	1
Update date	2 June 2016
Author	SMARTRAC / k731743
Approved	SMARTRAC / 2.6.2016 Mervi Väisänen/Smartrac

