


Specification

ER14505


Available Terminations	
-/P*	Axial pin
-/T /PT2*	Radial Pin
-/PT /TP*	Polarized Tab
(*) : Reference to Standard Terminals for Single Cells	

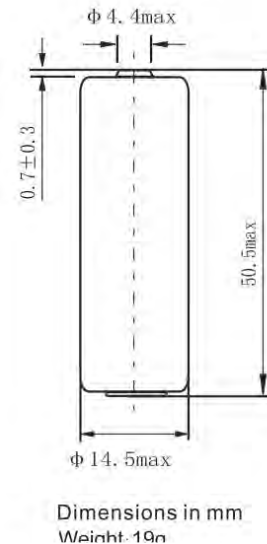


Feature	<ul style="list-style-type: none"> • High and stable voltage • Low self-discharge rate (Annual self-discharge rate is lower than 1% of capacity at 25°C) • Long Operating life • High energy density (700wh/kg) • Wide operating temperature range • Non-flammable electrolyte
Storage	<ul style="list-style-type: none"> • Store in clean, dry and cool circumstance (The ambient temperature shall not exceed 30°C)
Dimension	D 14.55mm x L 50.0mm
Weight	19g
Warning	Don't charge, crush, disassemble, expose contents to water, or store in the ambient temperature above 100°C. It may lead to explosion, burn or poison goods leakage.

Nominal Capacity	2400mAh
Open Circuit Voltage	3.66V
Max. Recommended Continuous Current	70mA
Max. Pulse Capacity	100mA 100mA, 0.1s pulse every 2 minutes, drain with 50%, 1mA at 25°C from undischarged cells with 20μA based current, yield voltage readings above 2.7V, the value may vary according to the pulse characteristics, temperature, and previous history
Operating Temperature Range	-55°C ~ 85°C


Discharge Voltage VS Time

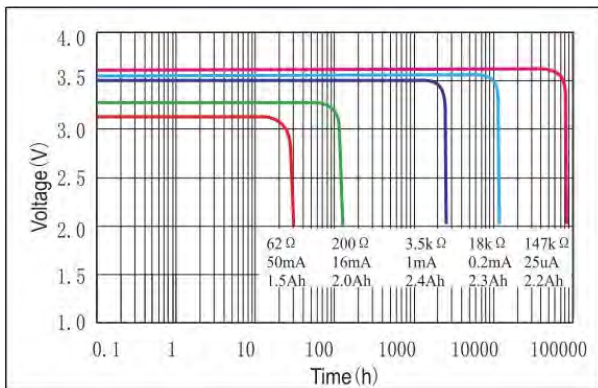

Discharge Voltage VS Time after Storage

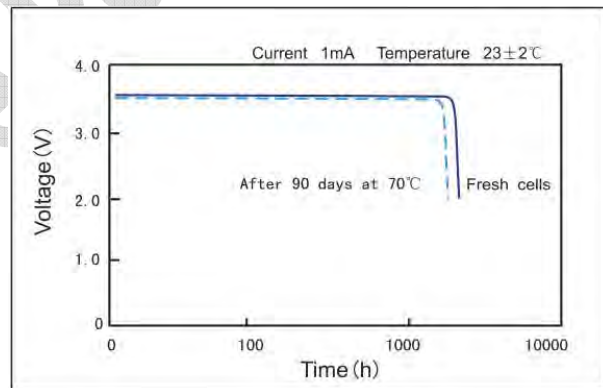

Voltage VS Current

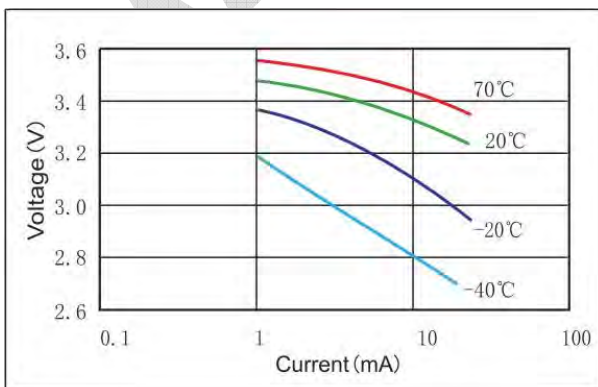

Capacity VS Current

