



INSTALLATION NOTES

- **RH** refers to the *passenger side* of the vehicle.
- **LH** refers to the *driver side* of the vehicle.
- Always use the proper torque specifications.
- If applicable to this installation, torque specifications will be listed throughout the document and at the end as well.
- Please read all of these instructions and familiarize yourself with the complete process **BEFORE** you begin.

GENERAL PREPARATION AND SAFETY INFORMATION

ECS Tuning cares about your health and safety, please read the following safety information. This information pertains to automotive service in general, and while it may not pertain to every job you do, please remember and share these important safety tips.

- Park your car in a safe, well lit, level area.
- Shut the engine off and remove the key from the ignition switch.
- Make sure any remote start devices are properly disabled.
- **ALWAYS** wear safety glasses.
- Make sure the parking brake is applied until the vehicle is safely lifted and supported.
- Whether lifting a vehicle using an automotive lift or a hydraulic jack, be sure and utilize the factory specified lift points.
- Lifting a vehicle in an incorrect location can cause damage to the suspension/running gear.
- **ALWAYS** support the vehicle with jack stands.
- **ALWAYS** read and follow all safety information and warnings for the equipment you are using.



NEVER get underneath a vehicle that is supported only by a jack, and **ALWAYS** make sure that the vehicle is securely supported on jack stands.

INSTALLING THE TRUNK LIGHTING KIT

Step 1: Trim Removal Tool

Gently pry the light assembly free from the trunk liner on the LH side of the trunk as shown.



Step 2:

Push down the locking tab on the connector to free the light assembly free from the factory wiring harness.



INSTALLING THE TRUNK LIGHTING KIT


Step 3:

Connect the factory harness connector into the new ECS harness as shown.



Step 4:


We will be routing the new ECS harness (Shown in **RED**) from the LH side, up over the rear deck and over to the empty opening on the RH side trunk liner as shown in the photo on the right.

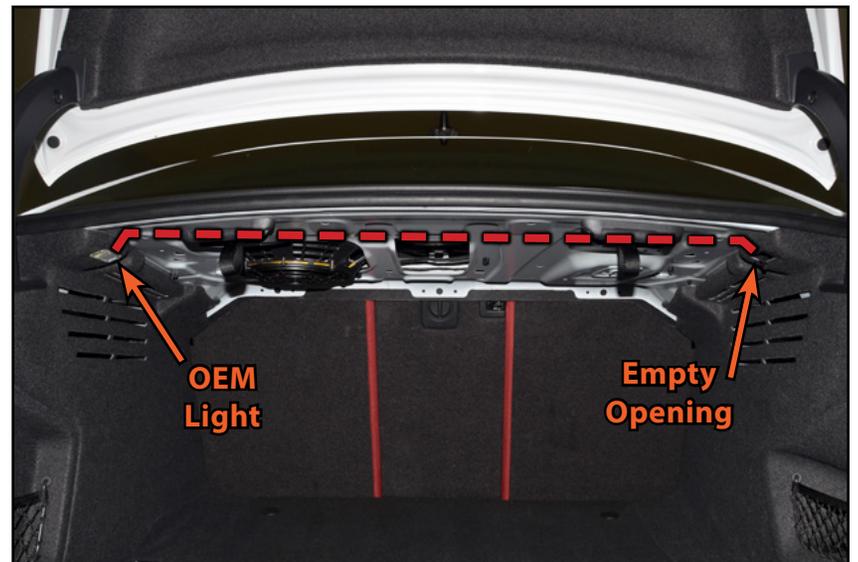

INSTALLING THE TRUNK LIGHTING KIT

Step 5: Mechanics Wire

Using electrical tape, secure the connector on the end of the ECS harness to a long piece of mechanics wire as shown.

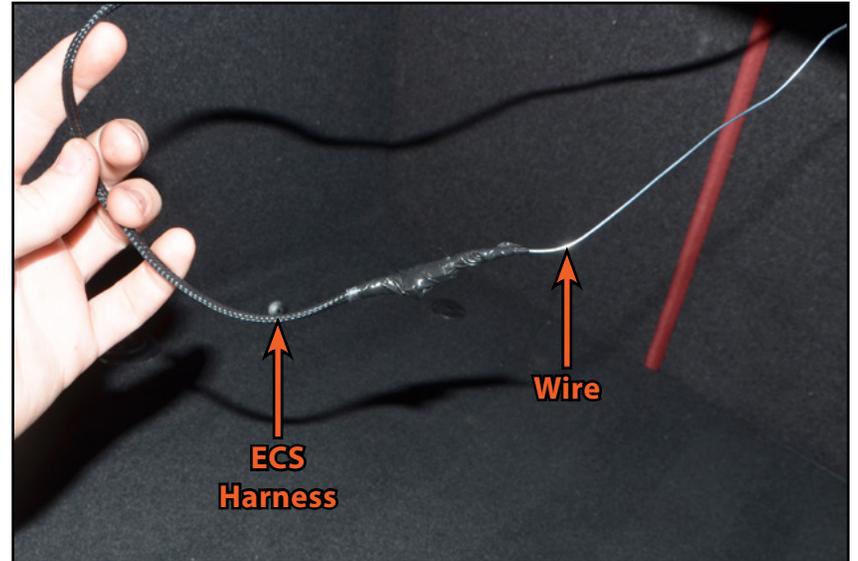

Step 6:

Feed the wire up over the rear deck and over to the RH opening as shown then carefully pull the wire down through, pulling the harness through behind it.



INSTALLING THE TRUNK LIGHTING KIT

Step 7:

Remove the tape and connect the provided light assembly to the connector on ECS harness as shown and pop it into place into the empty opening on the RH side of the trunk.




Step 8:

Connect the factory trunk light assembly to the ECS harness on the LH side of the trunk and pop it back into the opening as shown.



Your Trunk Lighting Kit installation is complete!

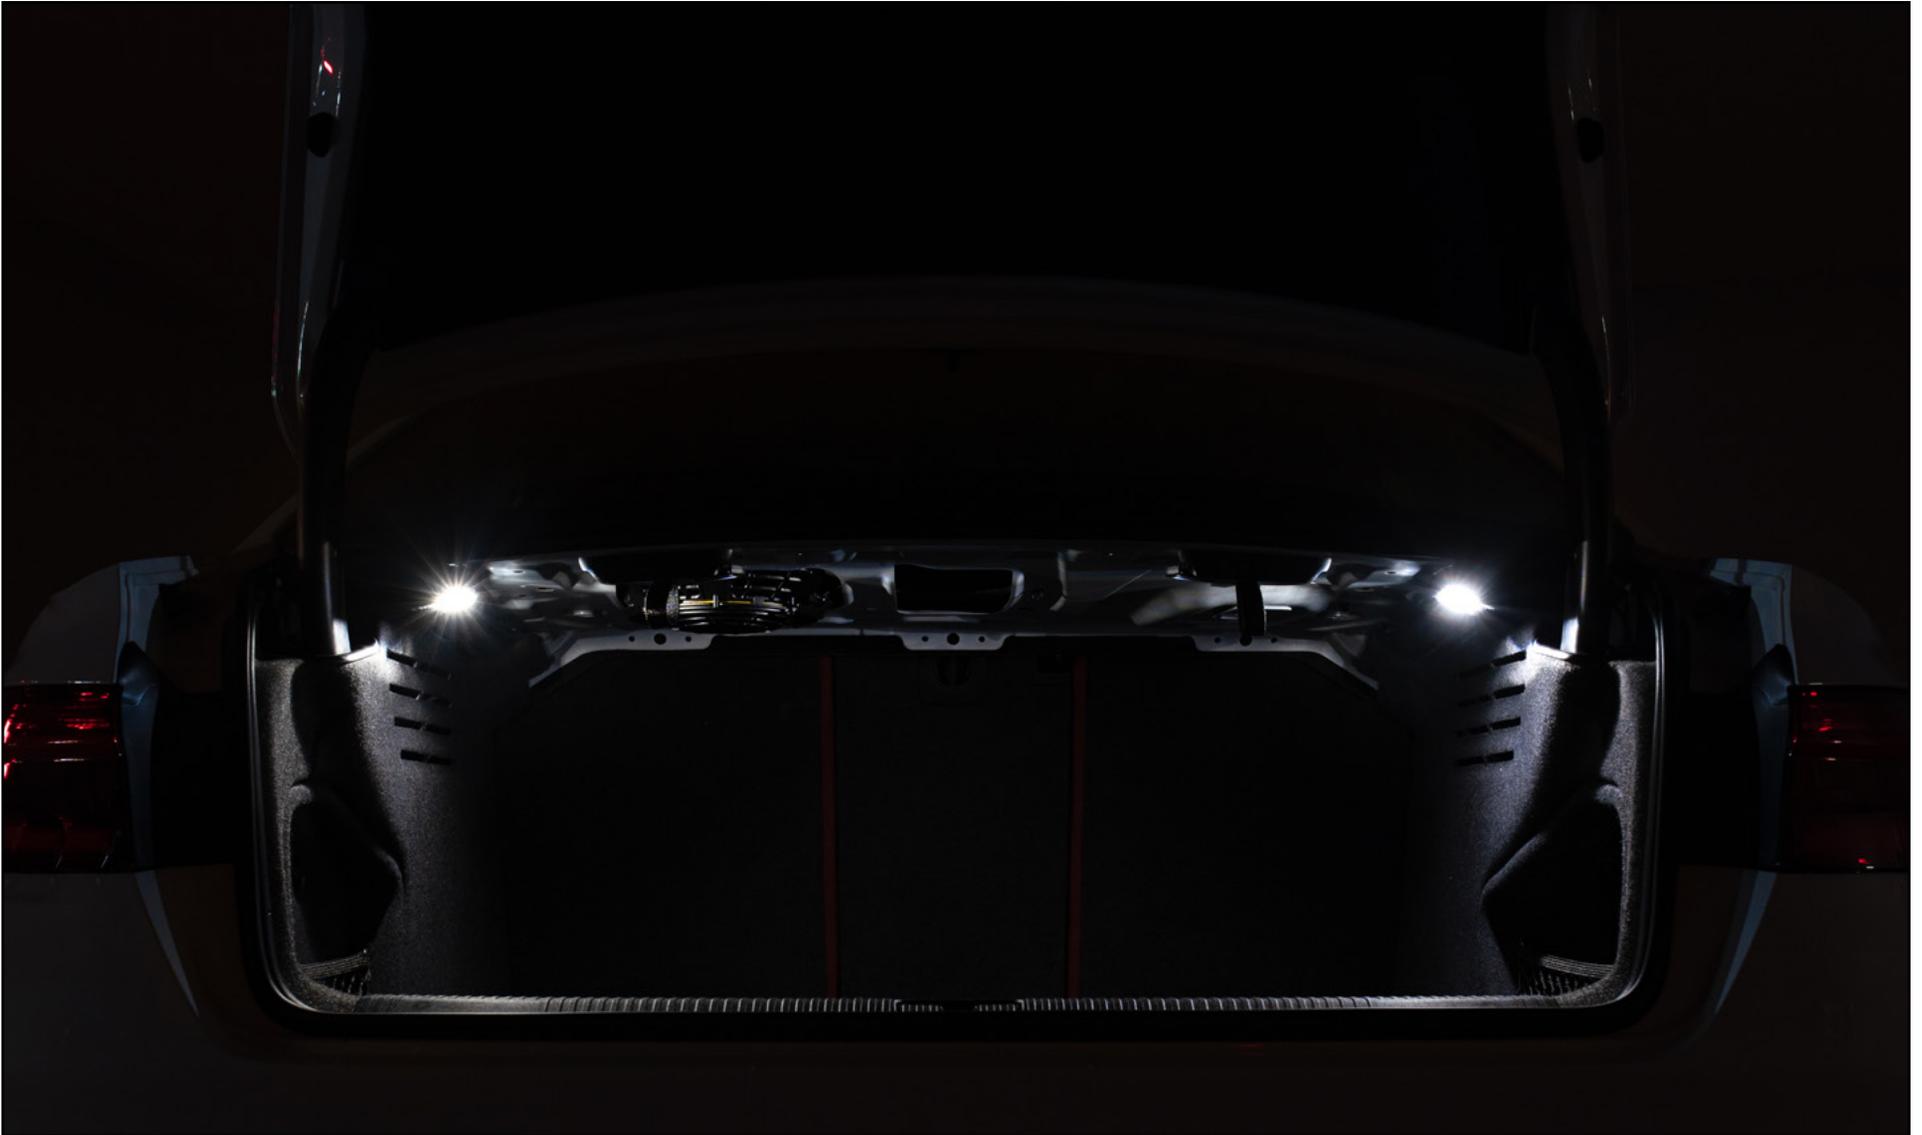

These instructions are provided as a courtesy by ECS Tuning

Proper service and repair procedures are vital to the safe, reliable operation of all motor vehicles as well as the personal safety of those performing the repairs. Standard safety procedures and precautions (including use of safety goggles and proper tools and equipment) should be followed at all times to eliminate the possibility of personal injury or improper service which could damage the vehicle or compromise its safety.

Although this material has been prepared with the intent to provide reliable information, no warranty (express or implied) is made as to its accuracy or completeness. Neither is any liability assumed for loss or damage resulting from reliance on this material. SPECIFICALLY, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY IS MADE OR TO BE IMPLIED WITH RESPECT TO THIS MATERIAL. In no event will ECS Tuning, Incorporated or its affiliates be liable for any damages, direct or indirect, consequential or compensatory, arising out of the use of this material.