
CONTENTS

Introduction	2
Products	
Lahti	10
Lahti100	12
Lohja	16
Aura	22
Vesanto	26
Vaasa	28
Mahlu	32
Eskola	34
Imatra	38
Salo	40
Haara	44
Haara Metsa	48
Rokua	52
Kotka	54
Nivala	56
Alavus	60
Helmi	64
Kuulas	66
Salla	68
Vantaa	70
Capsule	72
Standard Hanging options	74
Standard Finishes	80



OUR STORY

Cameron Design House is an award-winning British bespoke sculptural lighting company based in London. Founded by Ian Cameron in 2014, Cameron Design House has become synonymous with unique, contemporary design and refined craftsmanship. Every piece is conceived and handcrafted in our studio workshop located in the leafy residential borough of St John's Wood.

Since 2014 Cameron Design House has grown into a globally recognised design studio, with quality and precision as an inherent trademark throughout our lighting pieces and client service - from design through to delivery. Using organic and precisely engineered elements, we create custom feature installations which are handmade to a client's specific requirements, allowing for bespoke sizing, configuration and finish.

Ian has a shared history between the United Kingdom and Finland and has combined the influences of vibrant central London and the tranquil Nordic countryside into his sculptural pieces. Proudly designed and made in Britain, embracing the British tradition of exploring the far reaches of possibility together with the Nordic premise of clean lines and maximising lightness, Cameron Design House prioritises both form and function to achieve beautiful, enduring designs.

BESPOKE DESIGN

All our pieces are custom made in our London studio. The bespoke nature of our approach means we are able to tailor each specification to the individual requirements of any project. Our design and customisation service is offered without a fee regardless of the scale of a project and we provide the 3D models, renders, technical drawings and documentation to support the design.

Our flexible approach has seen our experienced team work with interior designers, architects, engineers and clients from around the world on highly demanding and prestigious projects.

All projects are regularly reviewed by our design panel, headed by our founder and Creative Director Ian Cameron. This review process ensures every piece leaving our workshop meets the aesthetic and technical standard we are renowned for.

All our pieces can be shipped worldwide. Everything is carefully wrapped before being boxed or crated to its new home. Although London is where we reside (and Finland our spiritual home) we have clients around the globe. Much of our work can be seen in the UK, US and Canada, while we also have clients in China, Russia, Hong Kong, New Zealand, Australia, Dubai and the gulf to name only a few.





WORKSHOP

The London Borough of St John's Wood, better known for The Abbey Road Studios and Lords Cricket Ground, is where our workshop and design studio are located off a leafy residential street . Our workshop team are dedicated to quality craftsmanship, meticulously creating all our designs by hand.

We keep a tidy workshop, always buzzing with activity and we invite all our clients to come and see us at work and view our display pieces.

With all of our operations in the one location our design liaisons are part of the entire process, right through to shipping. This ensures the vision is not diluted and the small details never missed, while allowing flexibility and a personal, responsive service for our clients.

All of our pieces are delivered with comprehensive installation instructions and our technical team is always available to help with any issues. Typically, installation is carried out by our clients lighting installer, however we also offer a global site supervision service which puts one of our experts onsite to guide your installer through the whole process.





A combination of external and internally lit rings, the Lahti is an elegant circular hanging light that breathes life into any space with its simplistically beautiful design. Standard profile size: 40x20mm, 50x25mm or 65x25cm Bespoke options available. Up to 8 rings from 50 to 300cm diameters. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - External or internal multifaceted clear diffusers. LED matrix, CRI>95, ~ 50K hours life. LED standard colour temperature options: 2.7k and 3k (other temperatures available on request) Power to fixtures: Via suspension cables. Light Output: decorative lighting element only. Indicative Lux level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request. Wattage dependent on sizing. Class II driver as standard. Output Voltage: 24V. Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available. All fittings and installation instructions are provided.

Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components. Refer to instruction manual for detailed cleaning instructions.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.




Powder Coat Full range of Ral Colours available


Lahti

Ceiling Rose Direct Attach


Lahti Single
Standard dimensions:
70/100/120/150cm
28"/40"/47"/59"

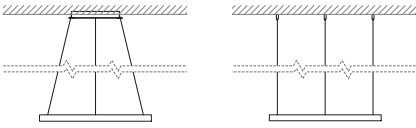


Lahti Double
Standard dimensions:
50,80/70,100
20",32"/28",40"
100,120/120,150
40",47"/47",59"

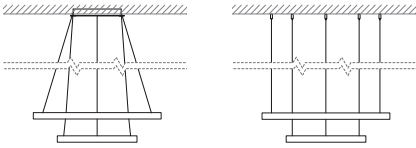


Lahti Triple
Standard dimensions:
60,80,100/80,100,120
24",32",40"/32",40",47"
110,130,150
43",51",59"

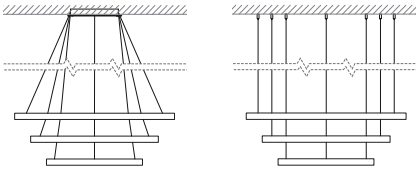


Lahti Quad
Standard dimensions:
60,80,100,110
24",32",40",43"
90,110,130,140
36",43",51",55"

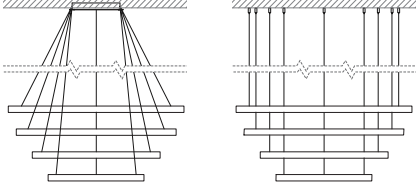

Alternative Compositions




Ceiling Rose or Direct attach as standard. Download our "Standard hanging options" spec for further information. Custom options available.

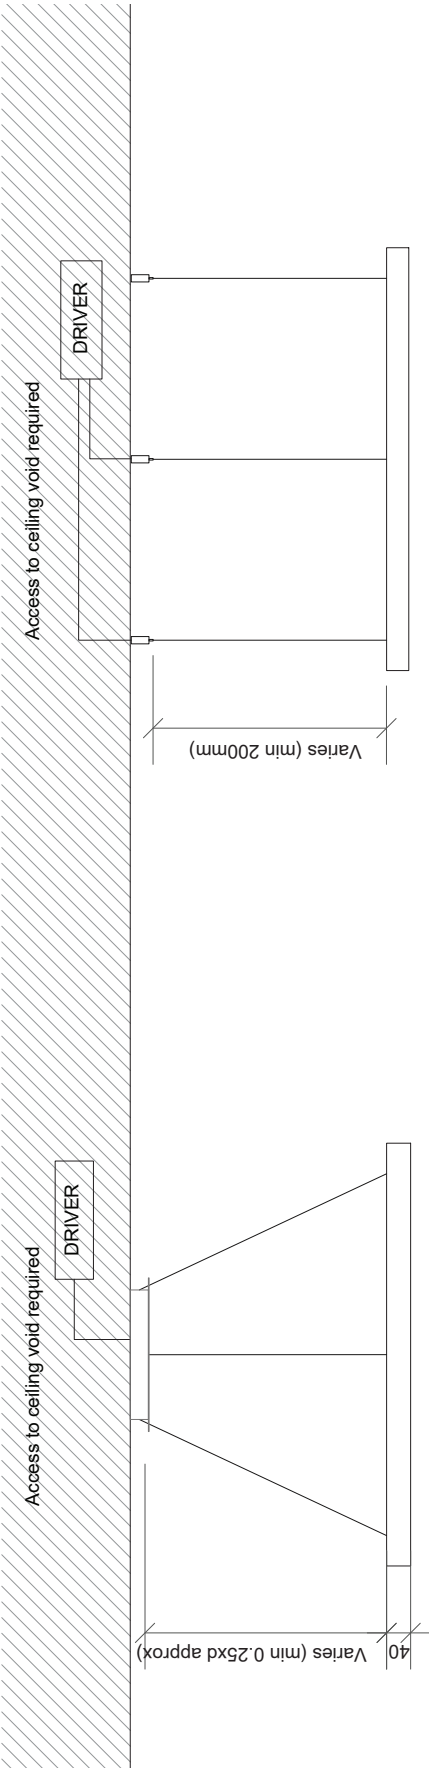


Elevation View with Direct Attach

Elevation View with Ceiling Rose

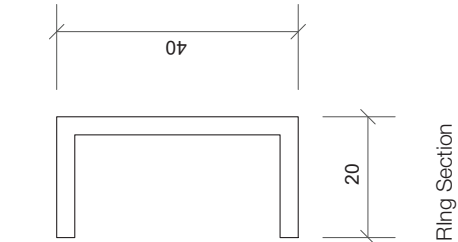

Ring Section

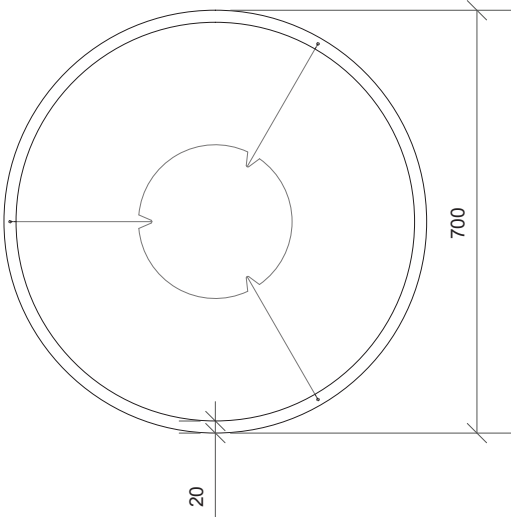

Plan View with Ceiling Rose



The Lahti100 configuration changes the impact this pendant has on a space, while staying true to the original aesthetic of simplicity and elegance. Bespoke options available. Profile size: 100x50mm. Up to 8 rings from 80 to 220cm diameters. Larger sizes available. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - External or internal multifaceted clear diffusers. LED matrix, CRI>95, ~ 50K hours life. LED standard colour temperature options: 2.7k and 3k (other temperatures available on request) Power to fixtures: Via suspension cables up to 150Watt. Light Output: decorative lighting element only. Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request. Wattage dependent on sizing. Class II driver as standard. Output Voltage: 24V. Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available. All fittings and installation instructions are provided.


Maintenance Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components. Refer to instruction manual for detailed cleaning instructions.

Lahti100

Direct Attach


Lahti100 Single

Standard dimensions:
70/100/120/150cm
28"/40"/47"/59"


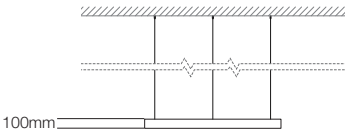


Lahti100 Cluster


Standard dimensions:
50,80/70,100
20"/32"/28"/40"
100,120/120,150
40"/47"/47"/59"

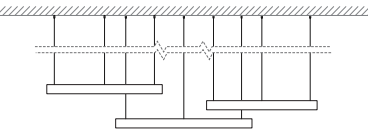

Direct attach as standard. Download our "Standard hanging options" spec for further information. Custom options available.

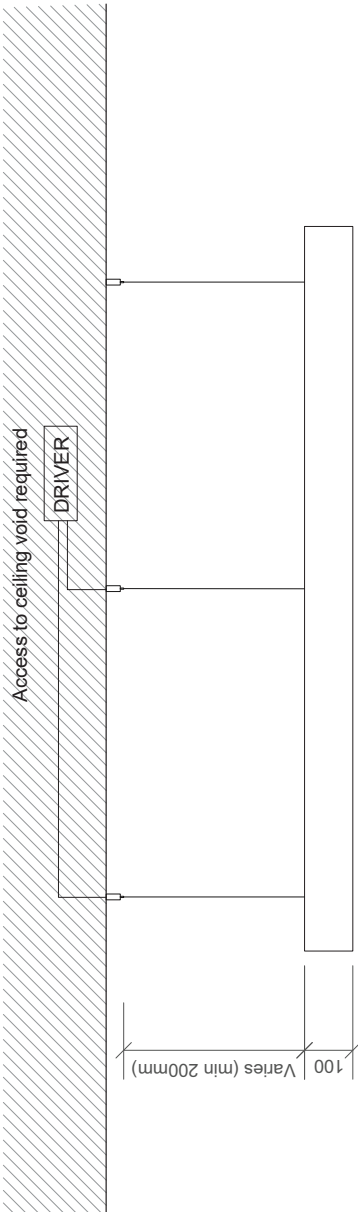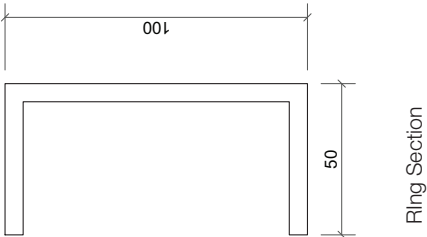

Elevation View

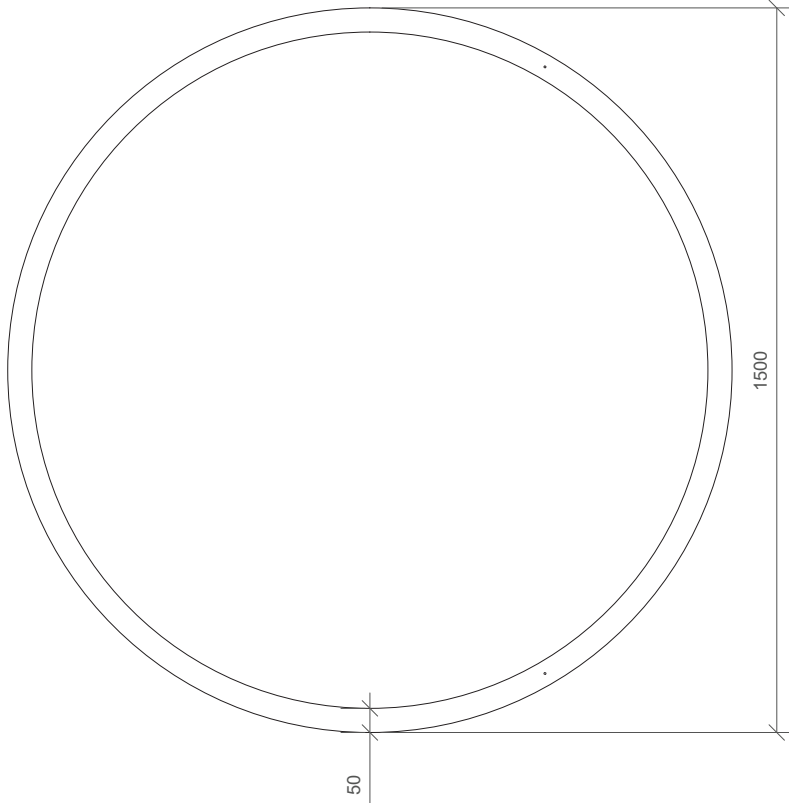

Plan View

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.







This iconic pendant light explores tranquility, space and equilibrium. A statement piece which, due to its bespoke nature, is flexible to compliment a variety of environments.

Standard profile size: 19x19mm or 25x25mm
Up to 8 tiers, from 40 to 230cm diameters. Bespoke options and larger sizes available. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - External or internal multifaceted clear diffusers. LED matrix, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.

Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.




Full range of Ral Colours available

Lohja


Lohja 4 tiers

Standard dimensions:
120,80,120,80cm
47",32",47",32"

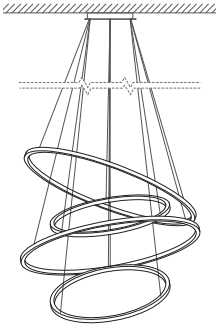


Lohja 5 tiers

Standard dimensions:
100,160,80,140,60cm
40",63",32",55",24"




Lohja 6 tiers


Standard dimensions:
160,110,160,100,160,100cm
63",43",63",40",63",40"
180,130,180,110,180,110cm
70",51",70",43",70",43"

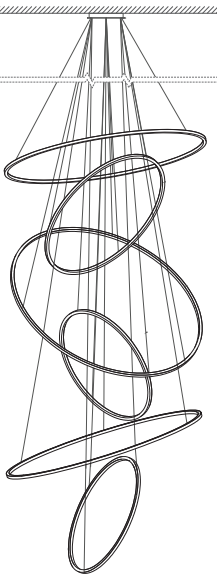


Ceiling Rose as standard.
Custom options available.

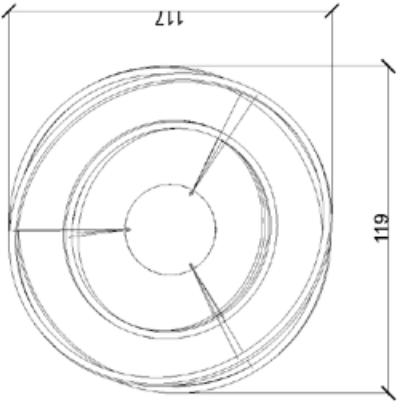







Plan View



Ring Section

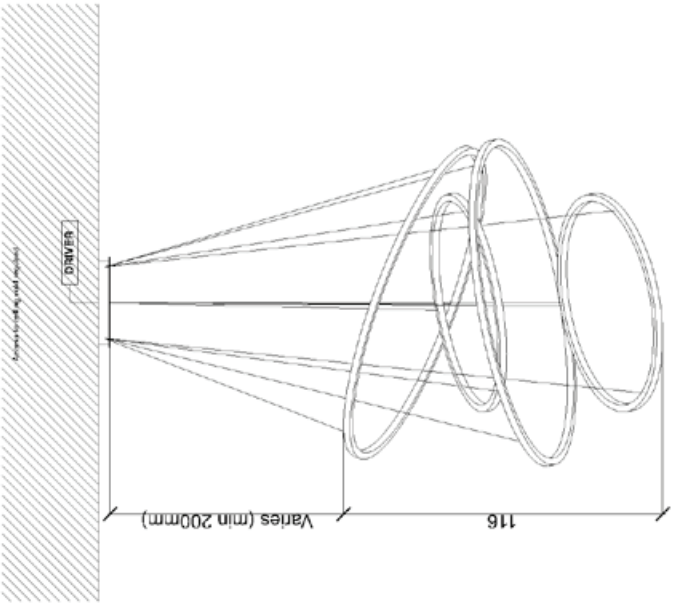

Elevation View

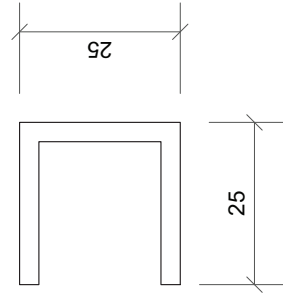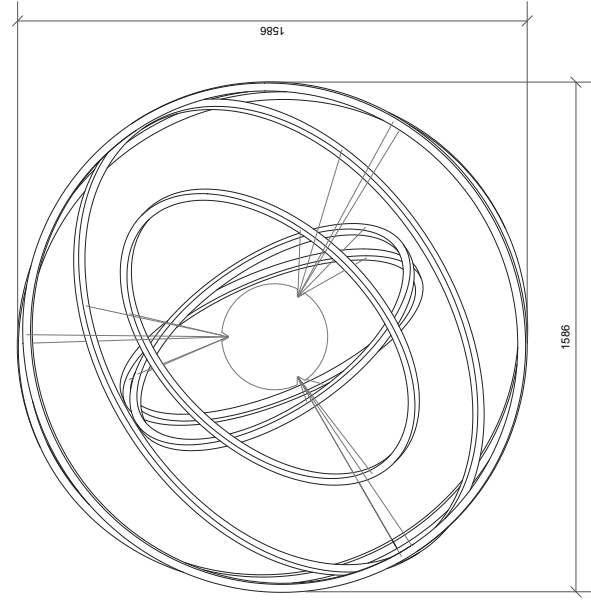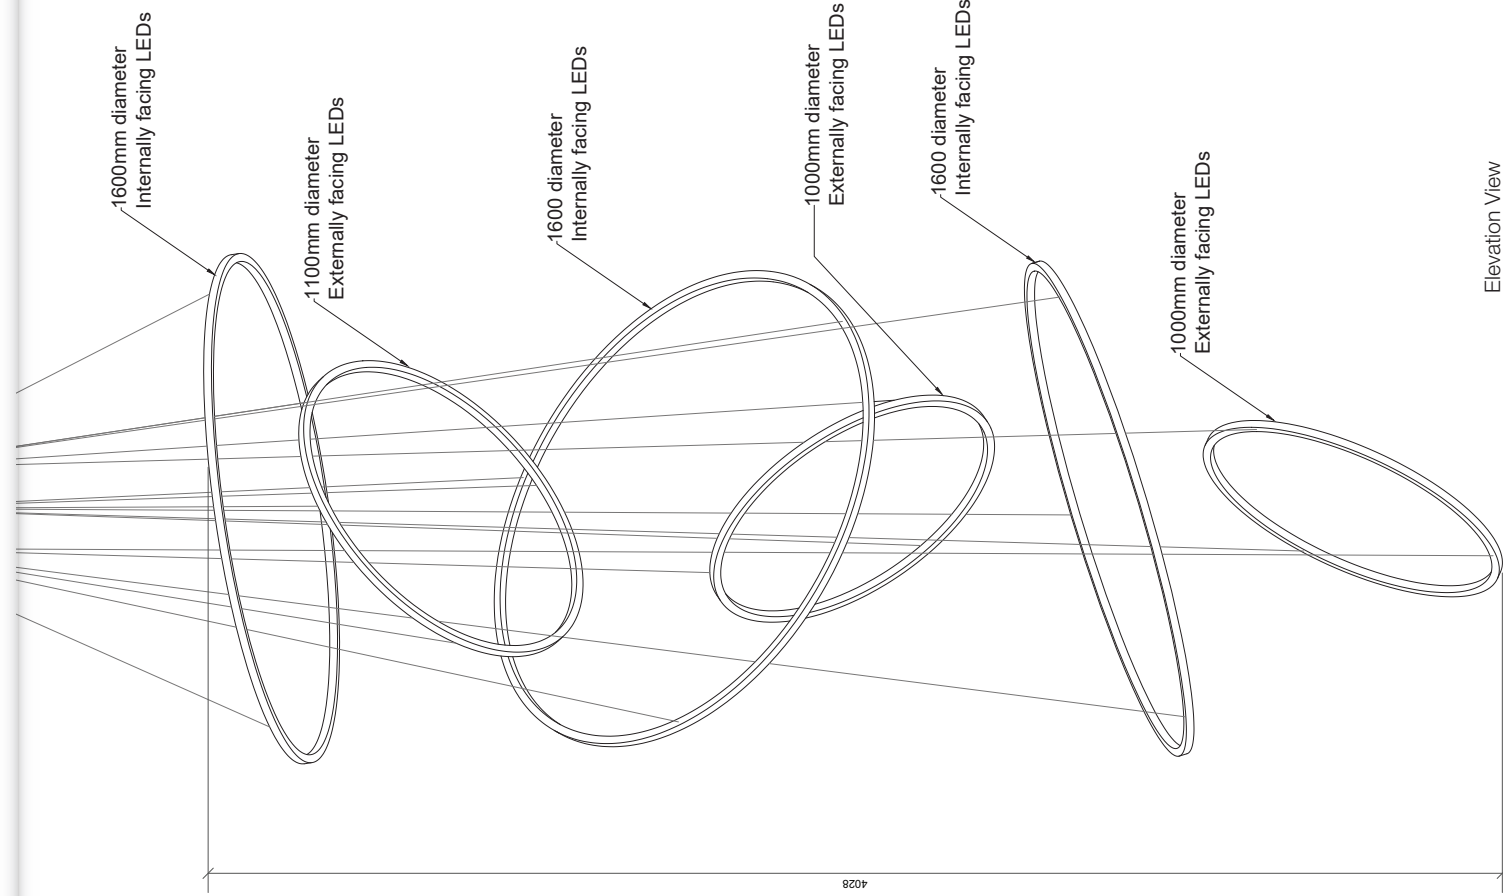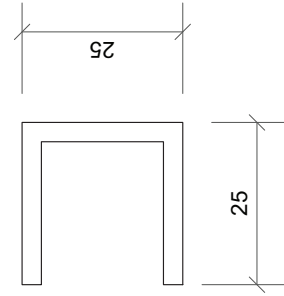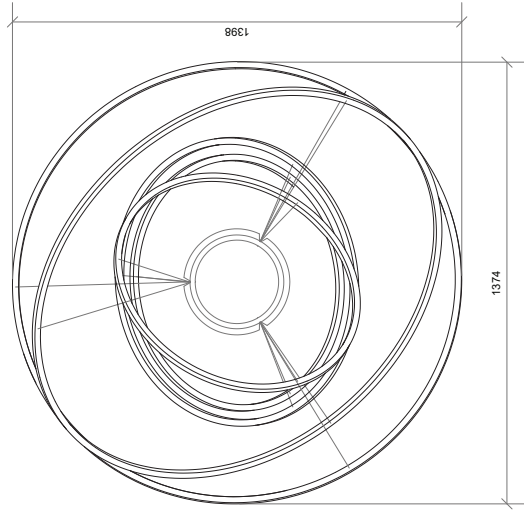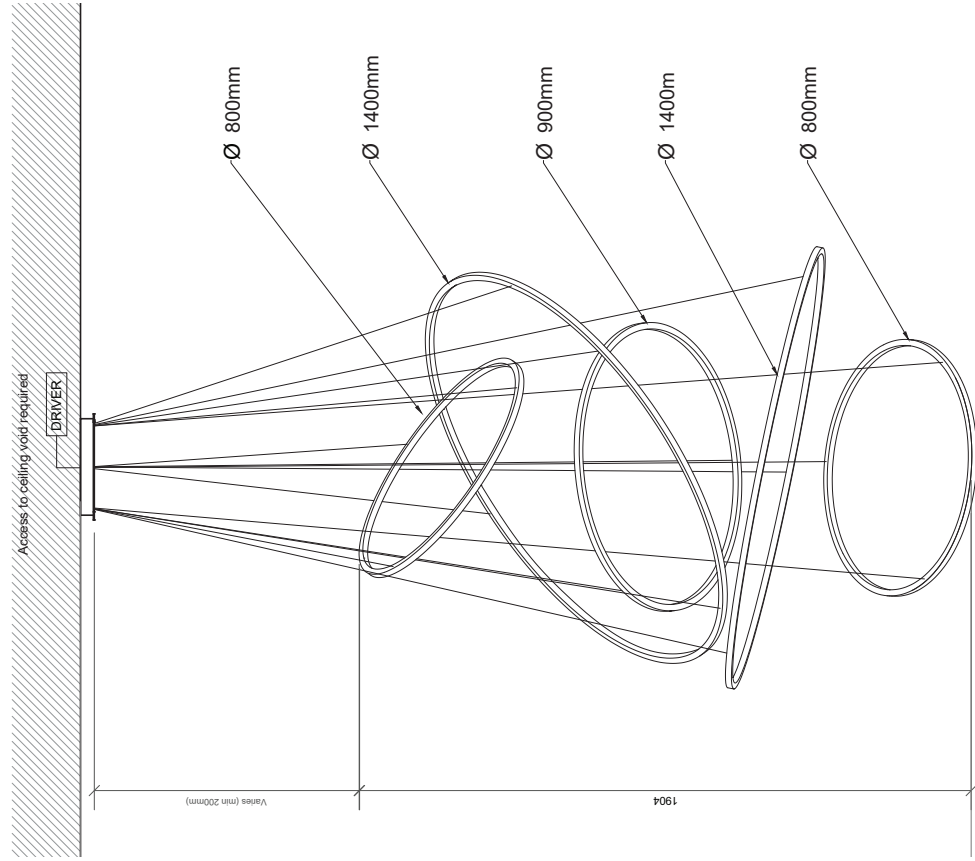



Lohja Tornio

Lohja Tornio

Standard dimensions:
40,80,50,80,40cm
16",32",20",32"

A sophisticated twist on our iconic Lohja design. The Lohja Tornio explores simplicity with geometry creating a striking, balanced sculptural form in a horizontally aligned configuration.
Standard profile size: 19x19mm or 25x25mm
From 40 to 230cm diameters. Bespoke options and larger sizes available. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.


Light Source - External or internal multifaceted clear diffusers. LED matrix, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

All fittings and installation instructions are provided.

Maintenance

Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components. Refer to instruction manual for detailed cleaning instructions.

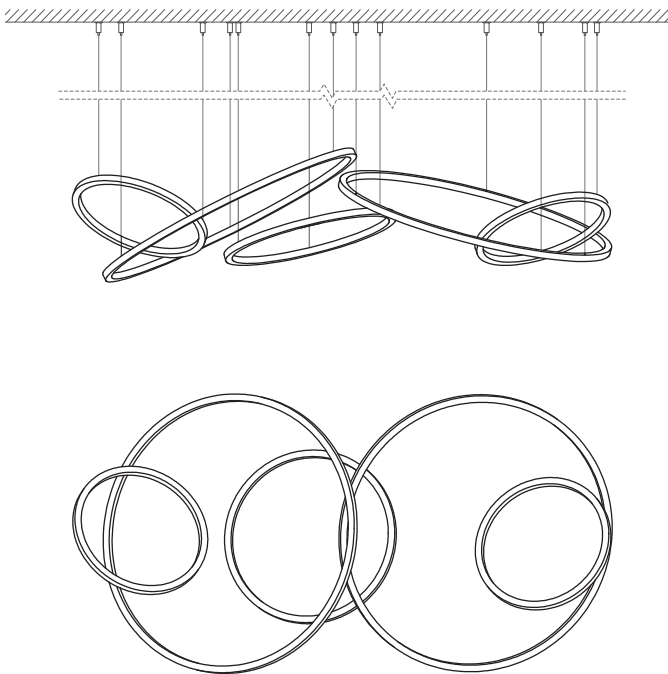

Direct Attach as standard. Download our "Standard hanging options" spec for further information. Custom options available.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.





This contemporary chandelier beckons its own atmosphere, conjuring serenity and grace -achieving simplicity through intricate design. The design explores circular form through sizing variations.

Standard profile size: 40x20mm or 50x25mm.

From 4 to 6 rings, 50 to 230 cm diameter.

Bespoke options available. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - External or internal multifaceted clear diffusers.

LED matrix, CRI>95, ~ 50K hours life.

LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)

Power to fixtures: Via suspension cables.

Light Output: decorative lighting element only.

Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.

Wattage dependent on sizing. Class II driver as standard.

Output Voltage: 24V.

Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.

All fittings and installation instructions are provided.


Maintenance

Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.

Aura



Aura Elama

Standard dimensions:
70,120,80,100,50cm
28",47",32",40",20"

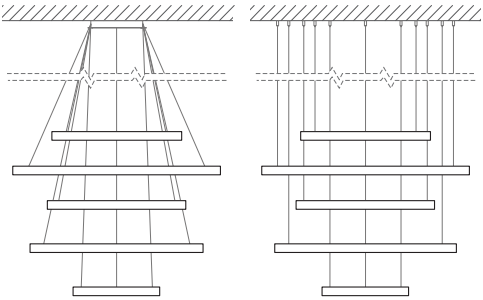


Aura Taso


Standard dimensions:
70,120,100,80,60cm
28",47",40",32",24"

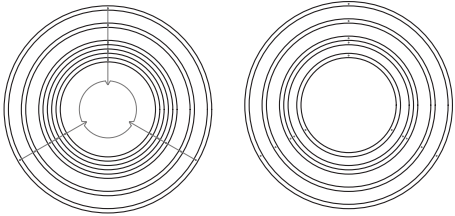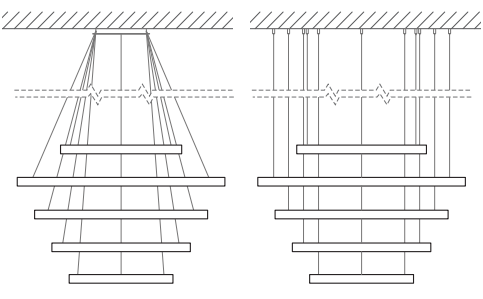


Ceiling Rose or Direct attach as standard. Download our "Standard hanging options" spec for further information. Custom options available.

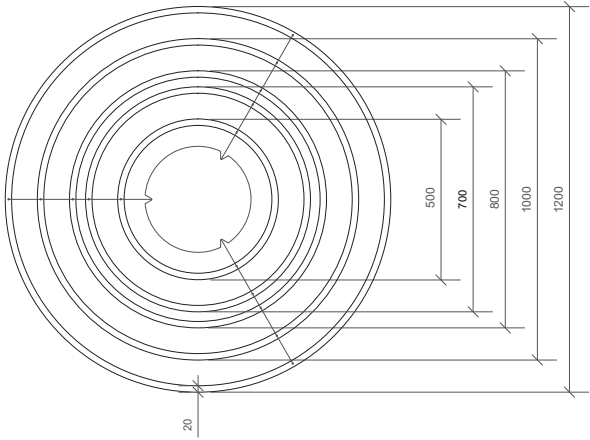

Plan View



Ring Section

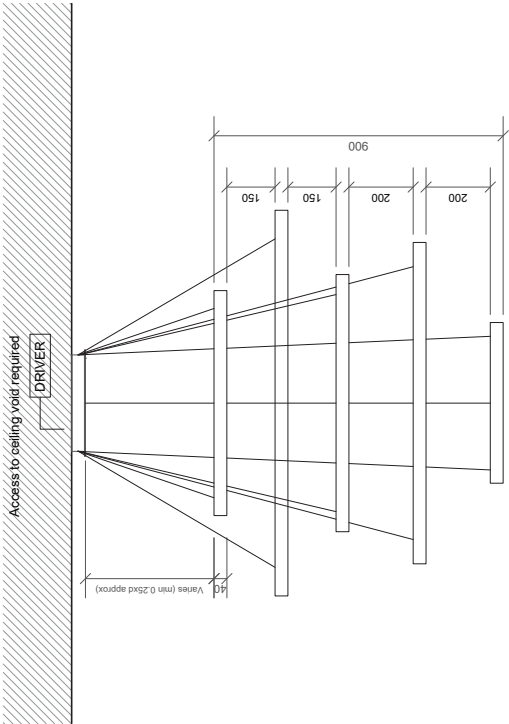

Elevation View

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.



Polished Metal

Brushed Metal

Powder Coat

Full range of Ral Colours available





The Vesanto is a contemporary chandelier which explores strong geometric form and clean lines. This versatile piece works well in residential and hospitality environments.
Standard profile size: 25x25mm and 19x19mm.
Bespoke options available. Up to 6 tiers from 60 to 200cm diameters. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - Opal light diffusers.
LED matrix, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lux level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.


Maintenance

Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components. Refer to instruction manual for detailed cleaning instructions.

Vesanto


Vesanto Single

Standard dimensions:
120cm
47"

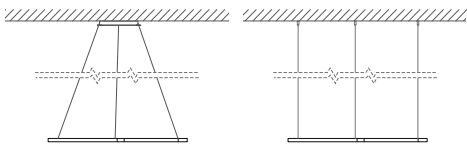


Vesanto Double

Standard dimensions:
120,160cm
47",63"

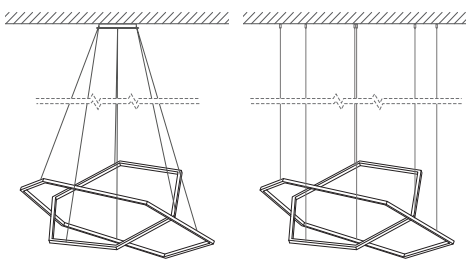


Vesanto Triple


Standard dimensions:
80,120,160cm
32",47",63"

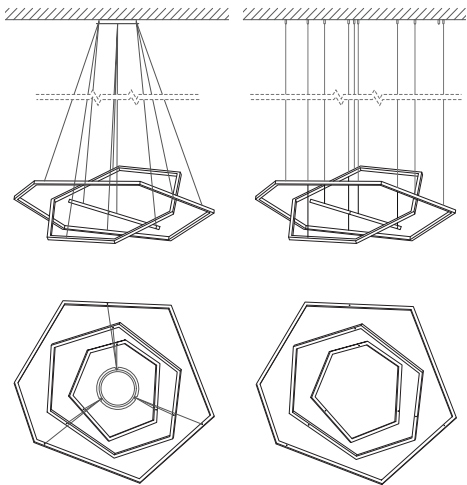


Ceiling Rose or Direct attach as standard. Download our "Standard hanging options" spec for further information. Custom options available.

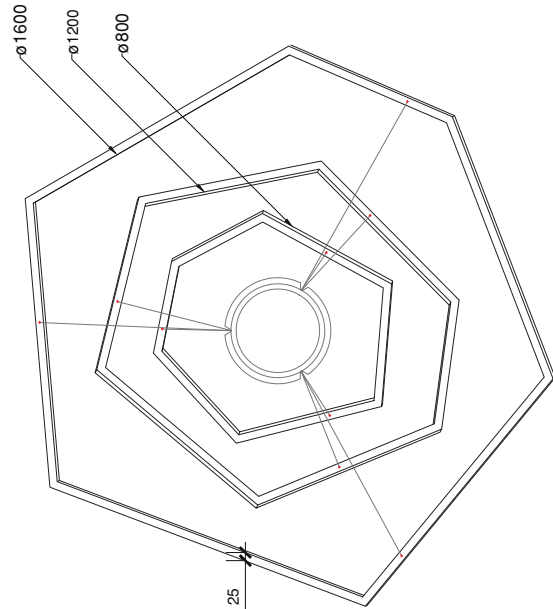

Plan View

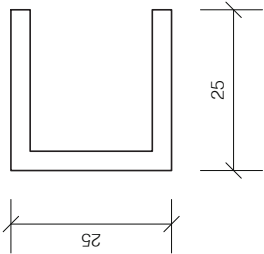

Ring Section

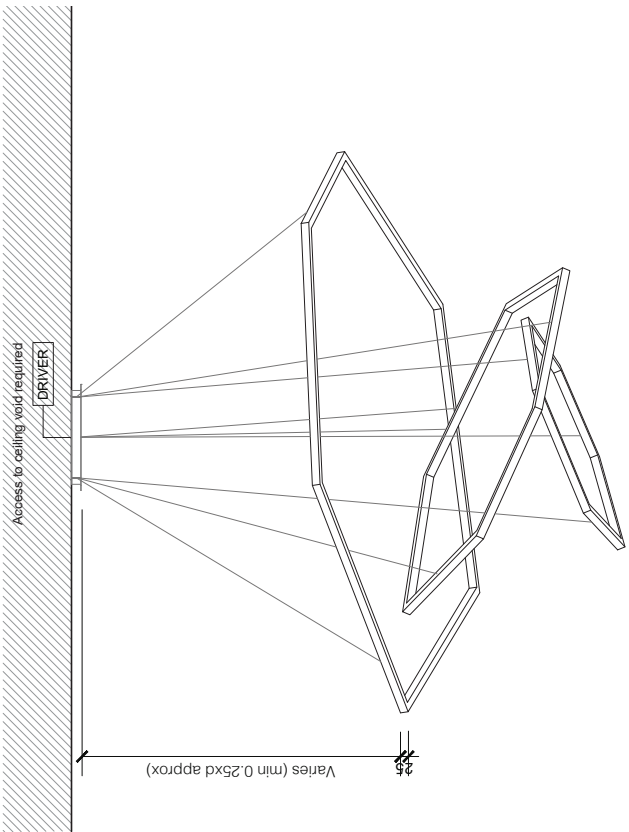

Elevation View

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.





Powder Coat Full range of Ral Colours available



Vaasa



Vaasa 7 rings

Standard dimensions:
85, 60, 45, 30cm
33", 24", 17.5", 12"

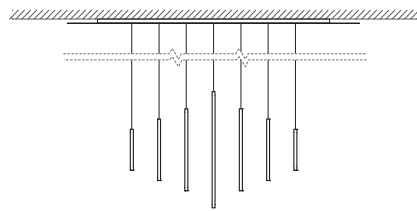

Vaasa 9 rings

Standard dimensions:
110, 85, 60, 45, 30cm
43", 33", 24", 17.5", 12"

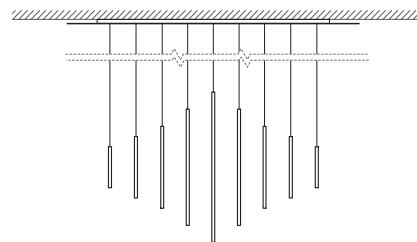

Ceiling Rose or Direct attach as standard. Download our "Standard hanging options" spec for further information. Custom options available.

The Vaasa is a minimalist lighting piece comprised of varying sized vertical circular lights. A beautiful centrepiece in a contemporary space such as above a dining table in a stunning residential project.

Standard profile size: 19x19mm

Minimum 5 rings from 30 to 120cm diameters.

Bespoke options available. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - Internal multifaceted clear diffusers.

LED matrix, CRI>95, ~ 50K hours life.

LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)

Power to fixtures: Via suspension cables.

Light Output: decorative lighting element only.

Indicative Lux level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.

Wattage dependent on sizing. Class II driver as standard.

Output Voltage: 24V.

Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.

All fittings and installation instructions are provided.

Maintenance

Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.


Refer to instruction manual for detailed cleaning instructions.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.




Powder Coat


Full range of Ral Colours available

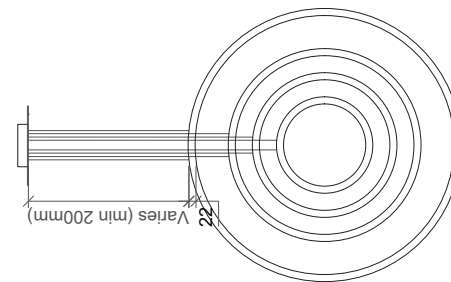


Side View

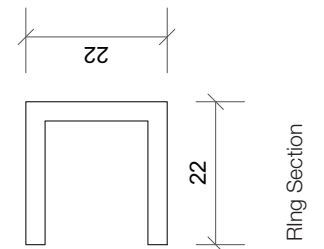

Ring Section

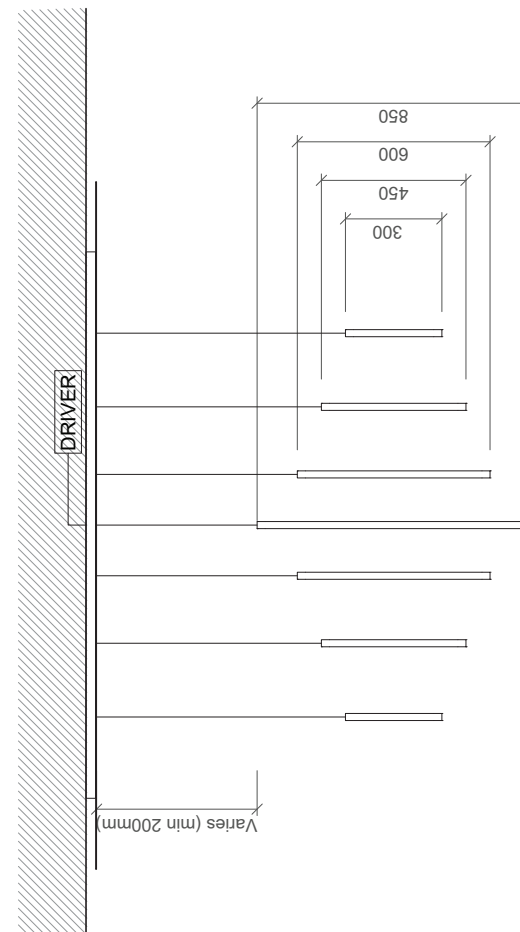

Elevation View

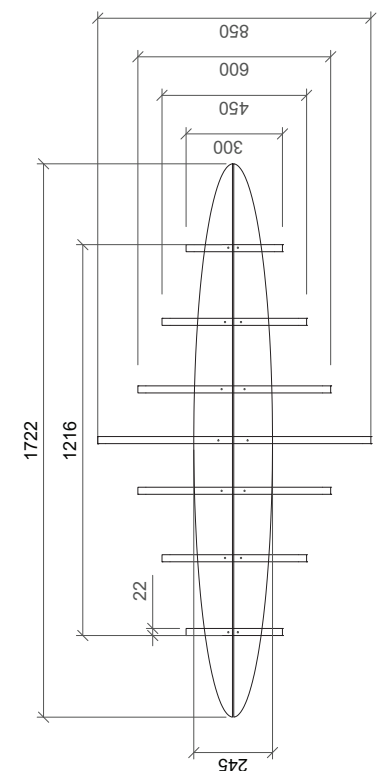

Plan View





The Mahlu floating circular seamless pendant creates a warm inviting glow by emitting light from both above and below the rings.

Standard profile size: 50x100mm or 50x60mm.
Bespoke options and larger sizes available. From 50 to 120cm rings diameters. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - Opal light diffusers.
LED matrix, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 3k (light output equivalent to 2.4K)
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.

Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.



Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.



Mahlu



Mahlu 60

Standard dimensions:
50x60mm profile
Standard diameters:
50,100,120cm
20",40",47"

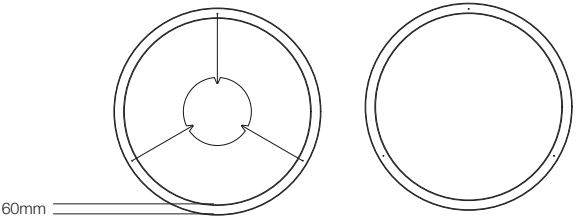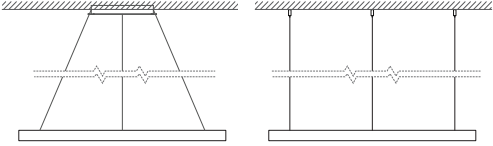


Mahlu 100

Standard dimensions:
50x100mm profile
Standard diameters:
50,100,120cm
20",40",47"

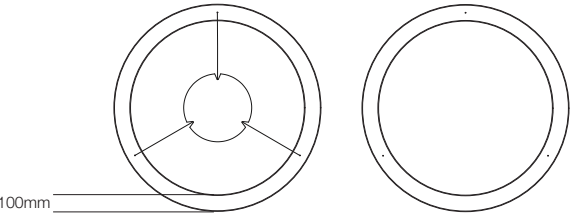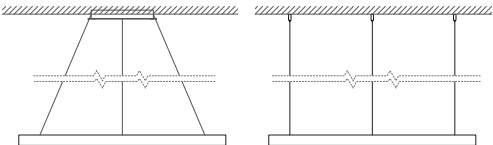


Ceiling Rose or Direct attach as standard.
Custom options available.

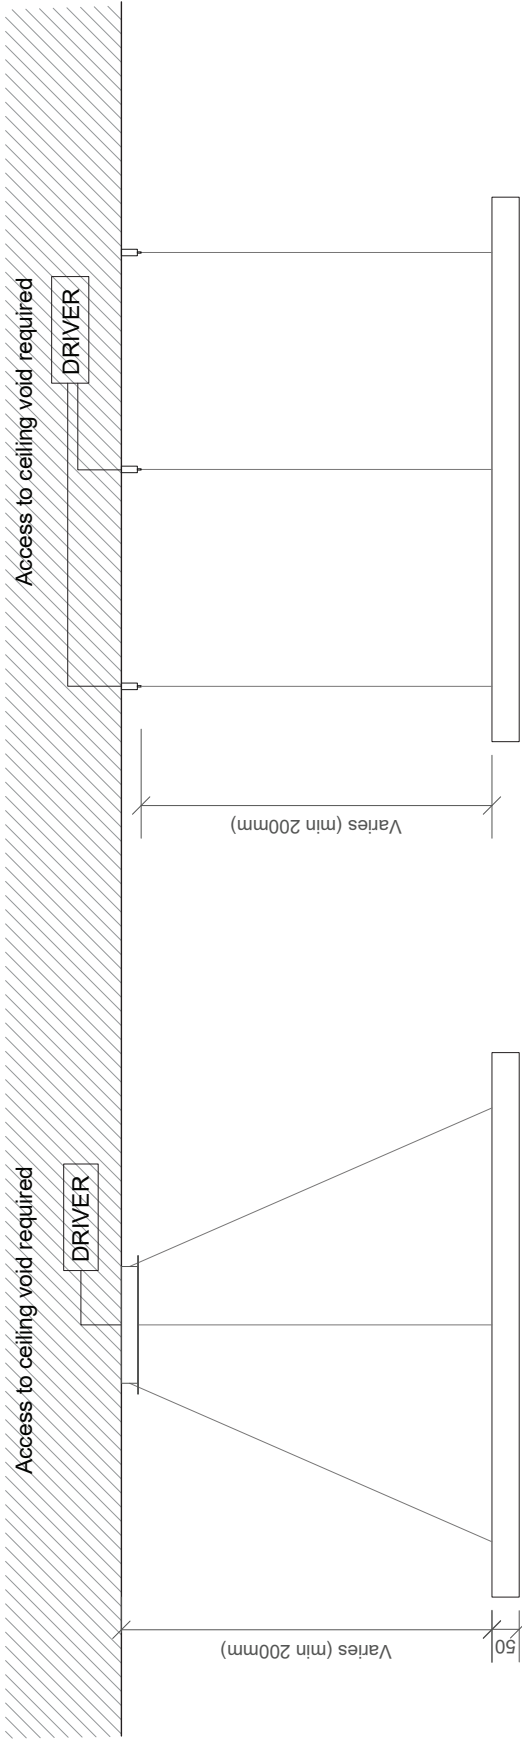


Elevation View with direct attach

Elevation View with ceiling rose

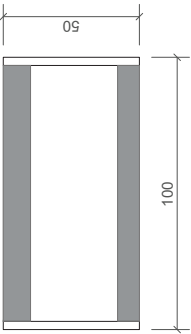

Ring Section

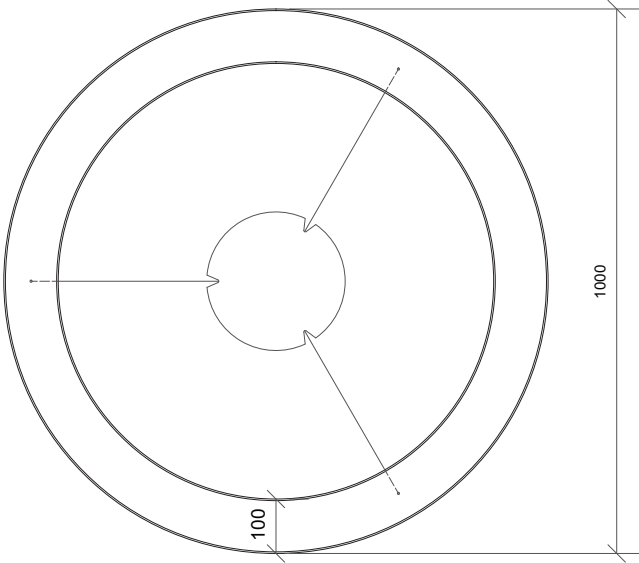

Plan View



A striking contemporary take on the French empire chandelier, the Eskola pendant references classic Art Deco exuberance and glamour.

Standard profile size: 200x80mm.
Available in circular or oval shape. Bespoke options available.
Up to 8 tiers from 40 to 200cm ring diameter. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - External and internal multifaceted clear diffusers. LED matrix, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)
Power to fixtures: Via suspension cables up to 150W.
Light Output: decorative lighting element only.
Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.


Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.
Refer to instruction manual for detailed cleaning instructions.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.




Eskola


Eskola 3 tiers
Standard dimensions:
110,90,70 cm
43", 36", 28"

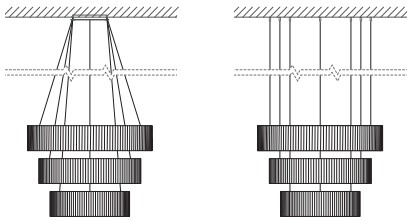



Eskola 4 tiers
Standard dimensions:
130,110,90,70cm
51", 43", 36", 28"

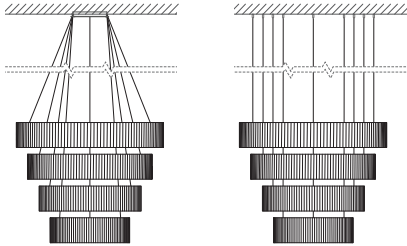

Eskola 5 tiers
Standard dimensions:
130,110,90,70,50cm
51", 43", 36", 28", 23"
150,130,110,90,70cm
59", 51", 43", 36", 28"

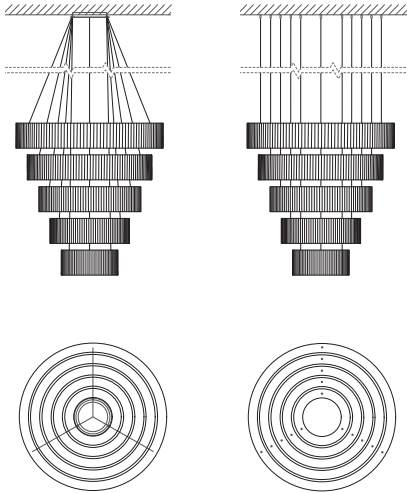

Ceiling Rose or Direct attach as standard. Download our "Standard hanging options" spec for further information.
Custom options available.

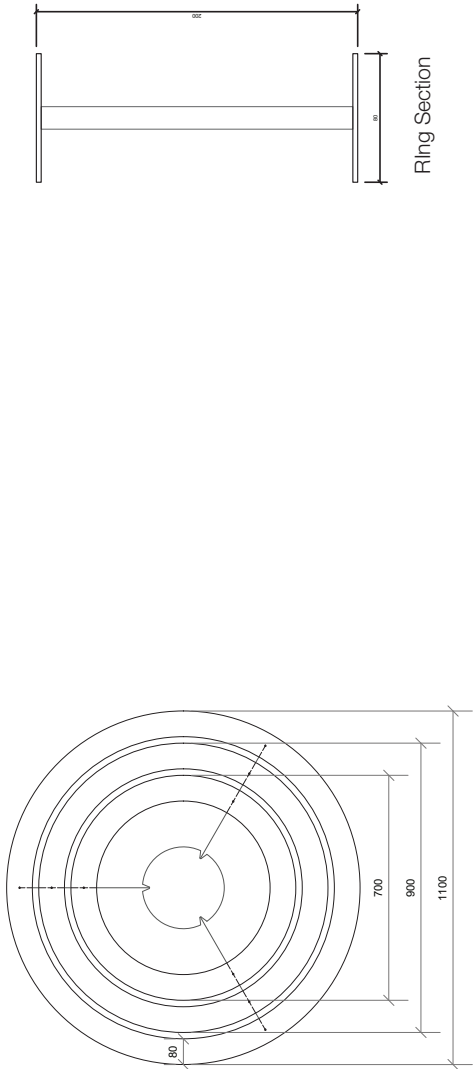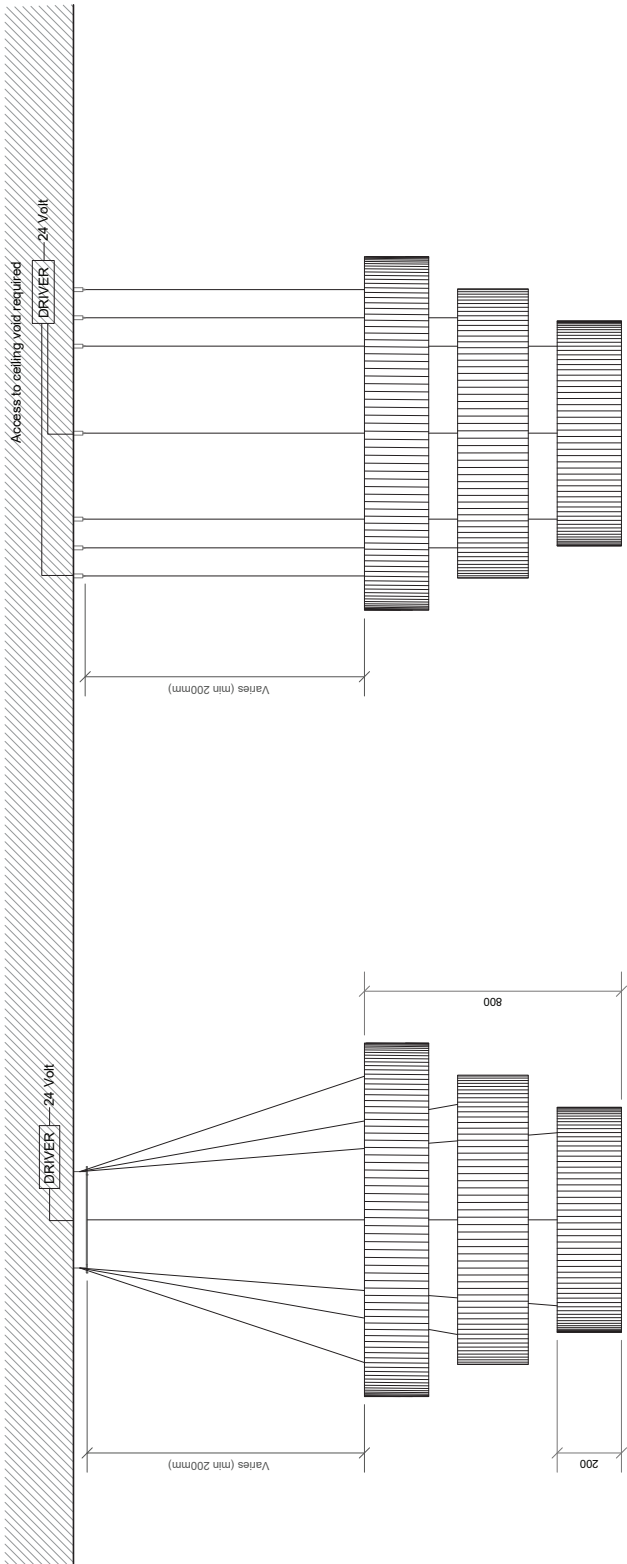





An organic evolution fused from our Eskola and Salo lights, this classic yet contemporary chandelier is versatile piece which compliments a variety of spaces.

Standard profile size: 100x100mm.
Up to 8 tiers from 40 to 200cm rings diameter. Integral LED lighting. Bespoke options and larger sizes available.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - External and internal multifaceted clear diffusers.
LED matrix, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.

Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.


Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.




Imatra

Ceiling Rose Direct Attach


Imatra 2 tiers
Standard dimensions:
70,100cm
28",40"

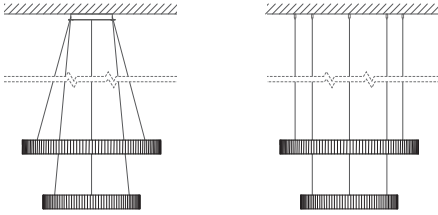


Imatra 3 tiers
Standard dimensions:
70,100,130 cm
28",40",43"

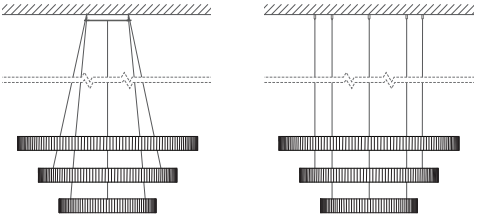

Imatra 4 tiers
Standard dimensions:
70,100,130,160cm
28",40",43",63"

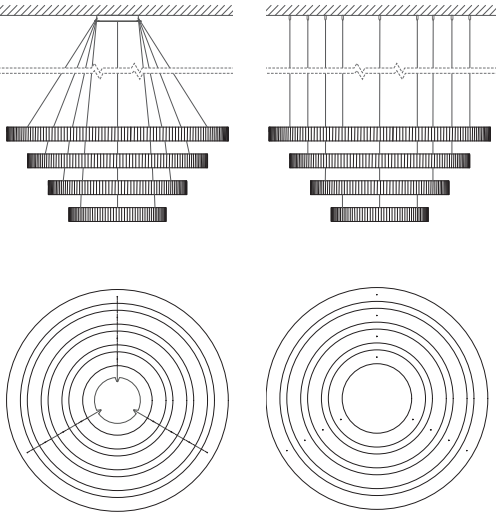

Ceiling Rose or Direct attach as standard.
Custom options available.

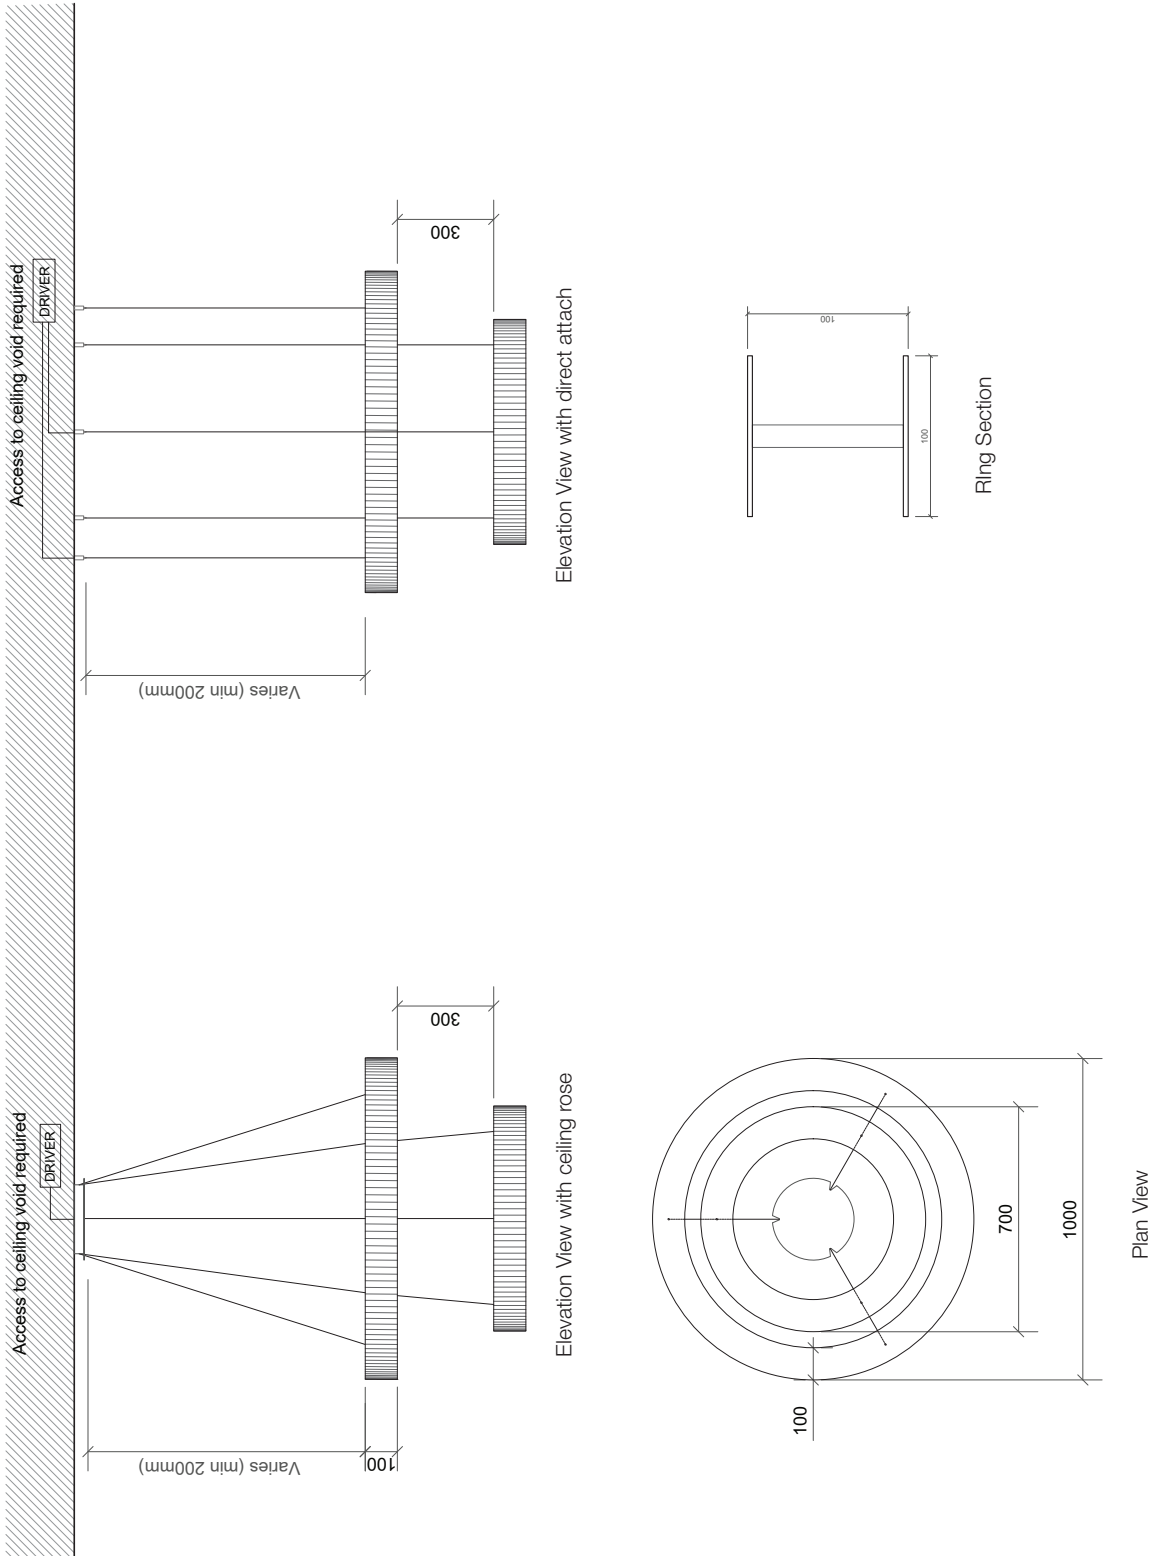



The Salo is a fusion of handcrafted rings which emit light from both the internal and external sides through hundreds of individually cut and hand laid faceted diffusers.
Standard profile size: 40x40mm. Up to 12 rings from 30 to 300 cm in diameter. Bespoke options available. Integral LED lighting.

- Hanging** - Fully adjustable drop height on 1.2mm stainless steel suspension cables.
- Light Source** - External and internal multifaceted clear diffusers.
LED matrix, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lumen level available on request.
- LED Driver** - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.

Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.

Polished Metal	Brass	Almond Gold	Rose Gold	Natural Copper*	Chrome	Nickel	Black Nickel	
Brushed Metal	Brass	Almond Gold	Rose Gold	Natural Copper*	Chrome	Nickel	Black Nickel	Antique Bronze


*Will tarnish over time

Full range of Ral Colours available


Salo

Ceiling Rose Direct Attach


Salo Taso
Standard dimensions:
80,100,90,70,60cm
23",40",36",28",24"

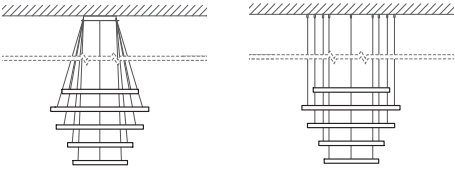


Salo Elama
Standard dimensions:
60,80,100,50,70,40cm
24",32",40",20",28",15"

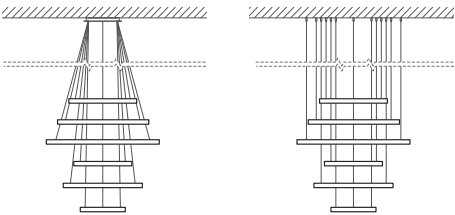

Salo Lunar
Standard dimensions:
From 50 to 120cm
20"-47"



Ceiling Rose or Direct attach as standard. Download our "Standard hanging options" spec for further information. Custom options available.

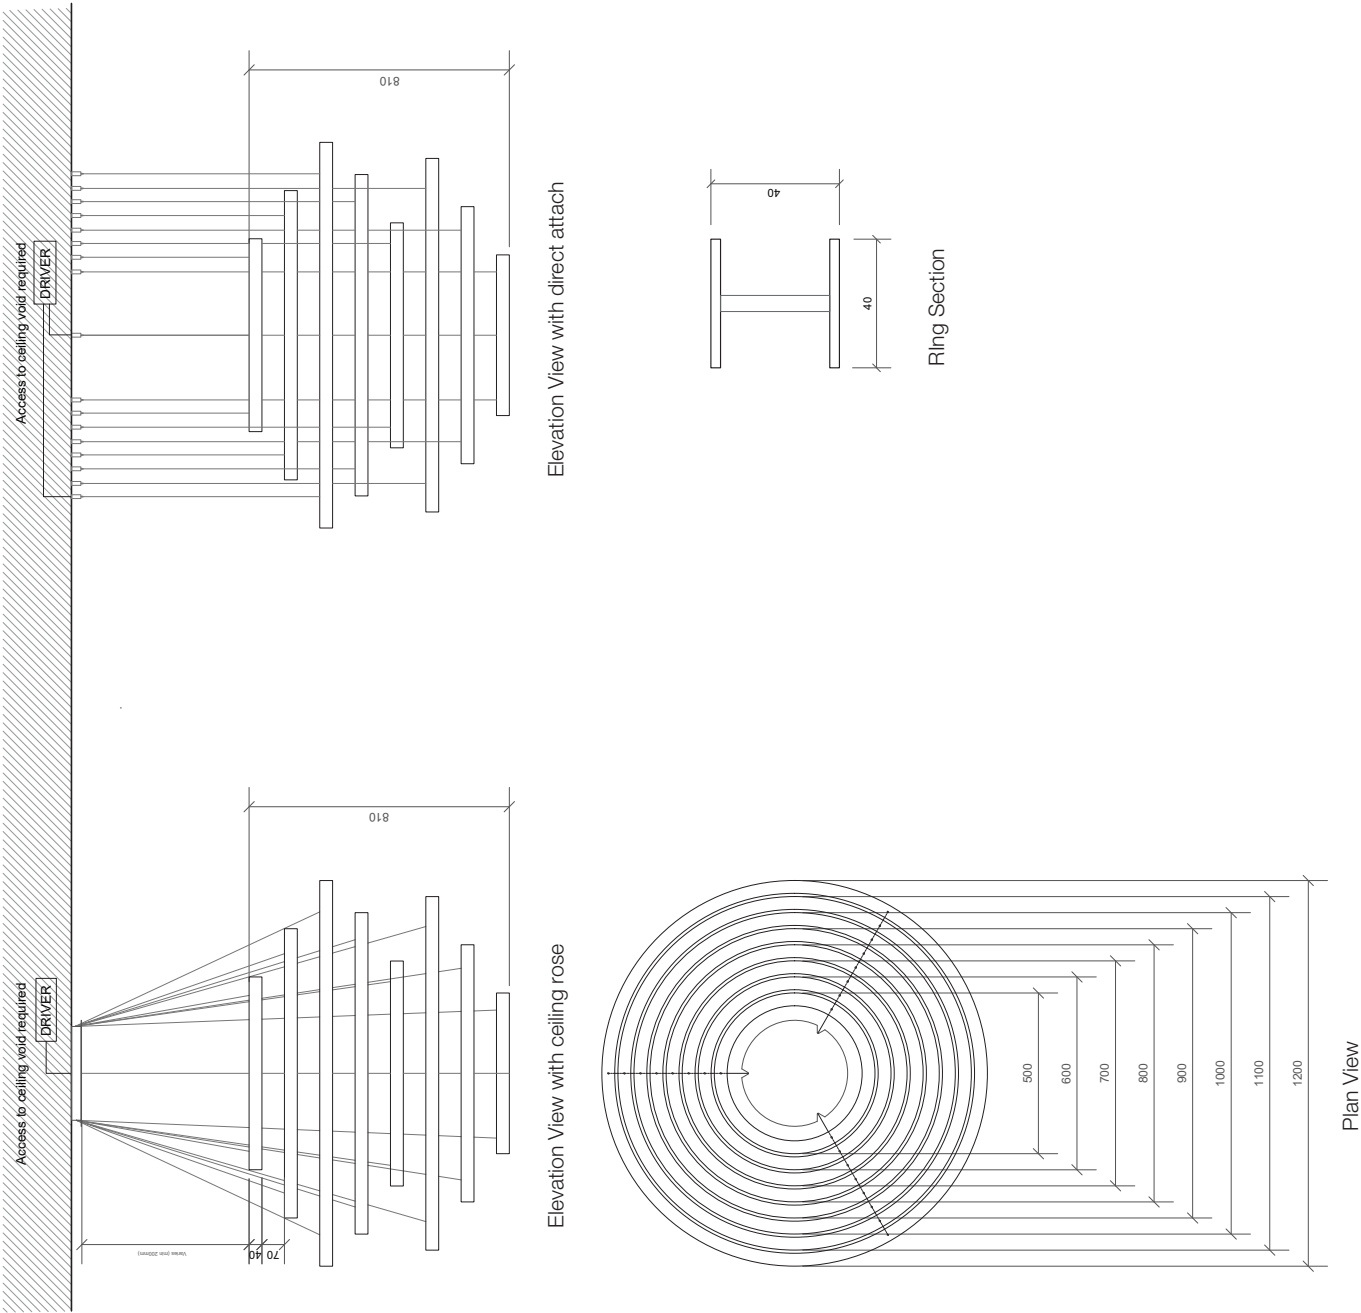






Haara


Haara Ten

Standard dimensions:
L165xH65xW75cm
L65"xH25.5"xW29.5"

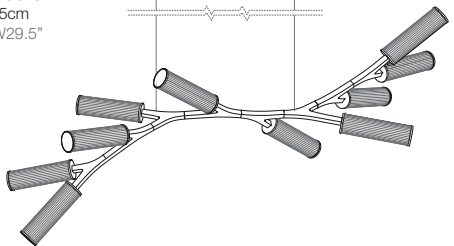

Haara Sixteen

Standard dimensions:
L200xH75xW67cm
L79"xH29.5"xW26"

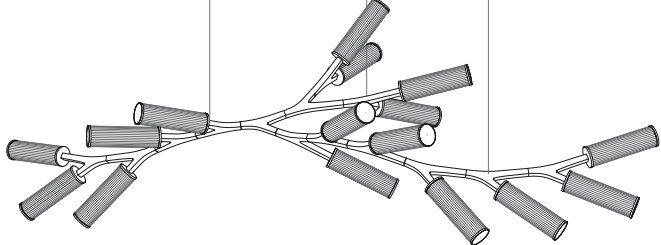

Custom hanging options available.

The branching frame of the Haara has a delicate and finely engineered structure, making a unique design statement in any space.
Bespoke service available. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - Glass diffusers.
LED lights, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lumen level available on request.


LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.


Maintenance

Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.
Refer to instruction manual for detailed cleaning instructions.


Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.

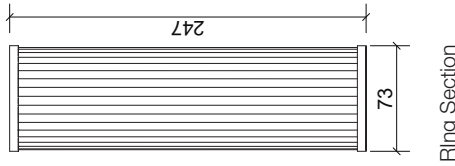

Ring Section

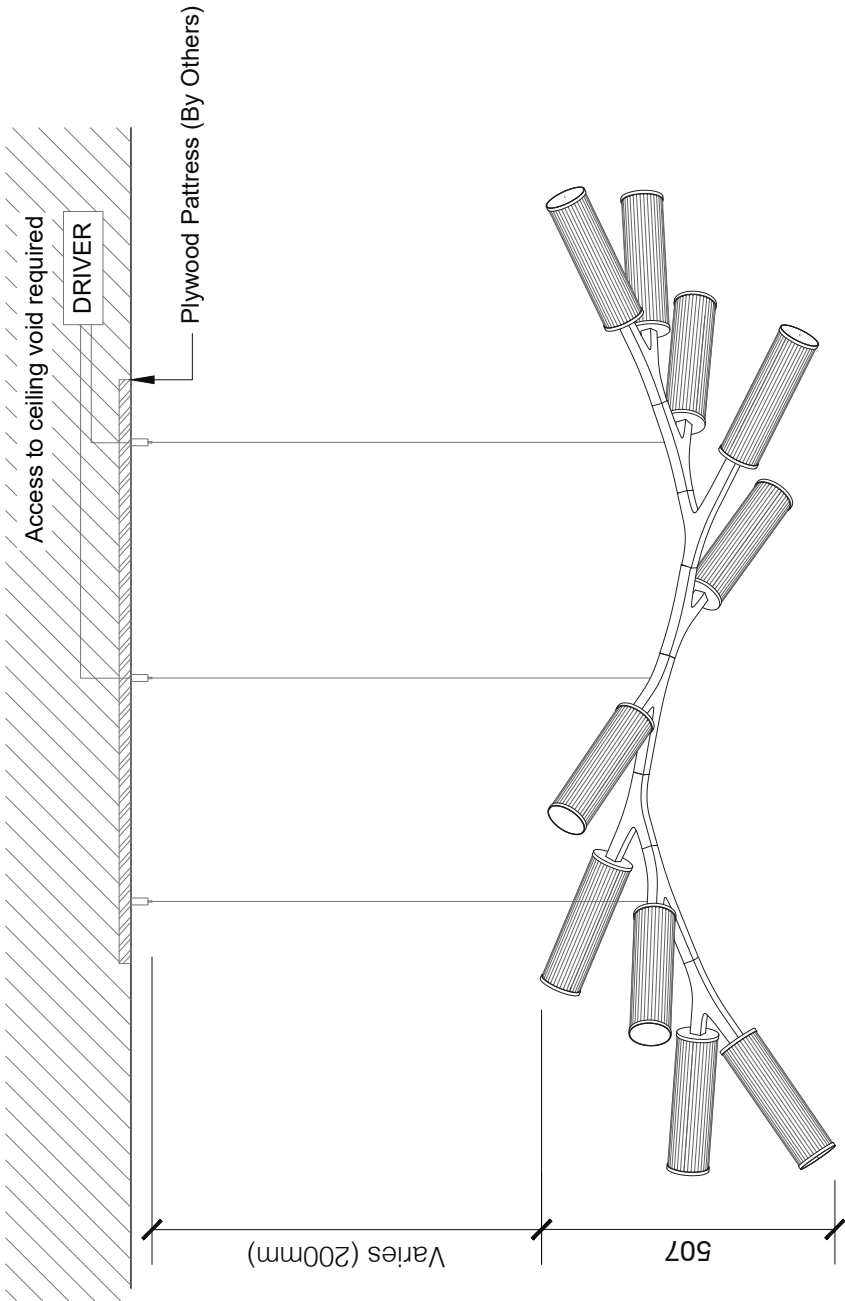

Elevation View

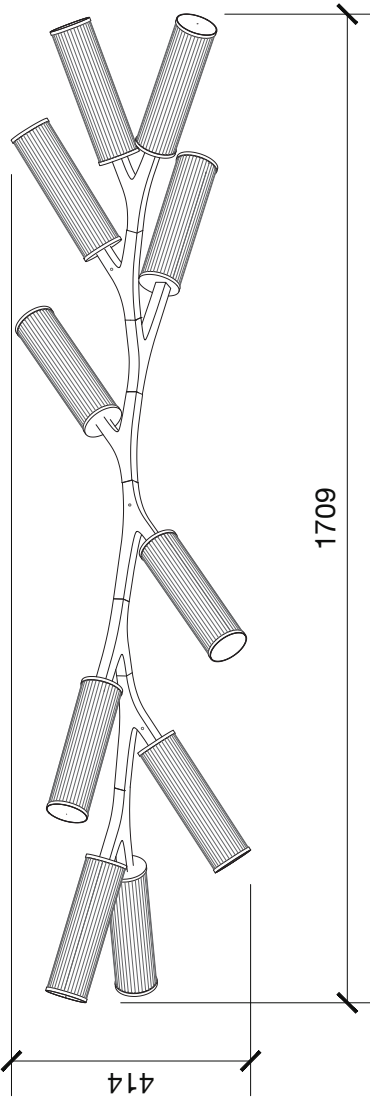

Plan View





Haara Metsa

Haara Metsa
Standard Small dimensions:
L80xH210xW75cm
L31.5"xH82.7"xW29.5"



A direct descendant of the Haara, the Haara Metsa grew organically to form an ambitious chandelier with vertical elegance. A beautiful statement piece in a space with high ceilings or the centrepiece down a spiral staircase. Up to 400cm drop height. Integral LED lighting. Bespoke dimensions and configurations available.

Hanging - Fully adjustable drop height on chandelier chain.

Light Source - Glass diffusers.
LED lights, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 2.4k, 2.7k and 3k (other temperatures available on request)
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lux level available on request.




LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.


Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components. Refer to instruction manual for detailed cleaning instructions.

Custom hanging options available.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.

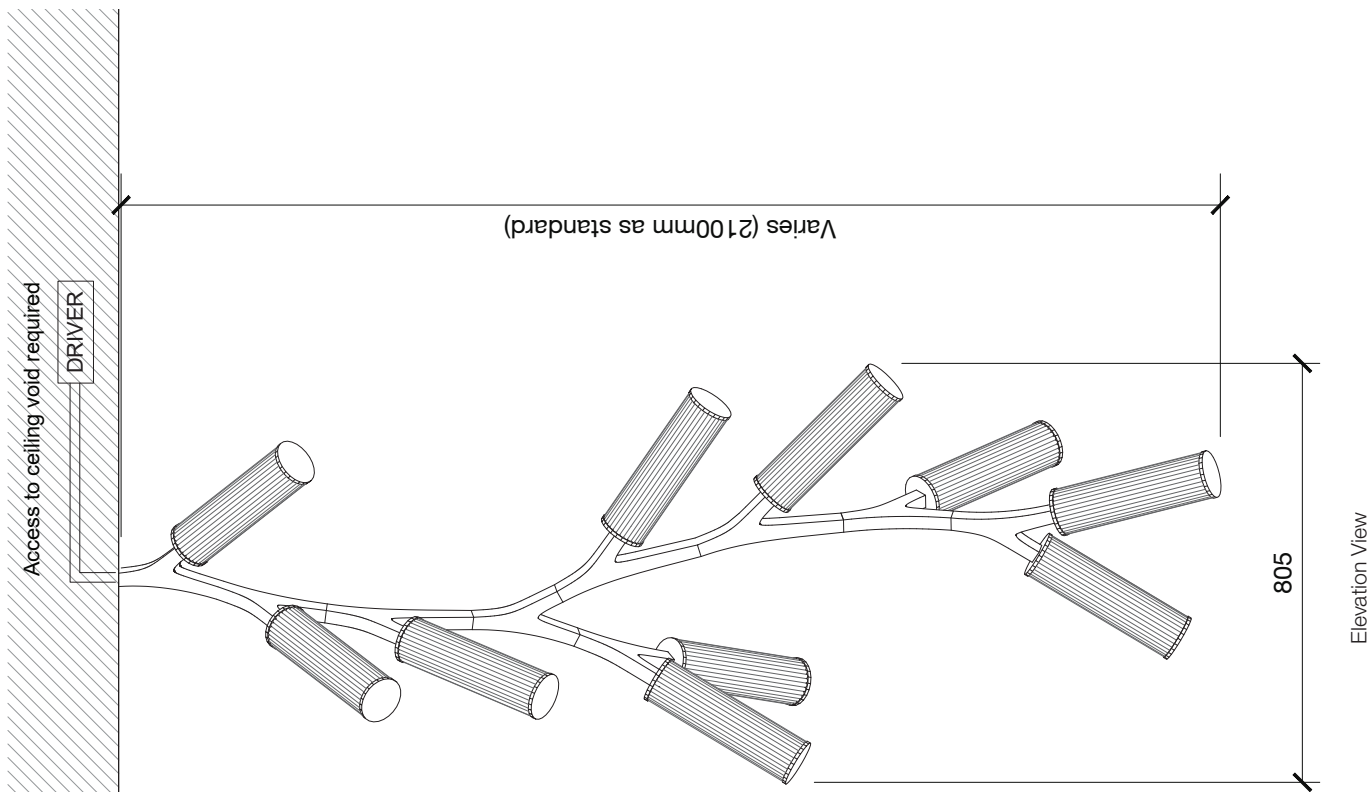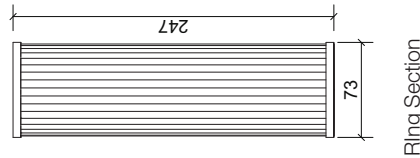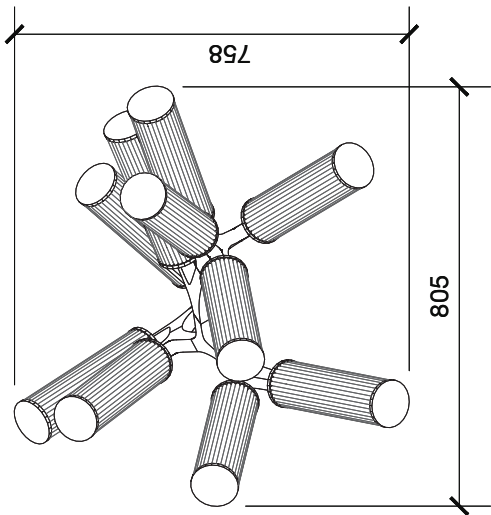



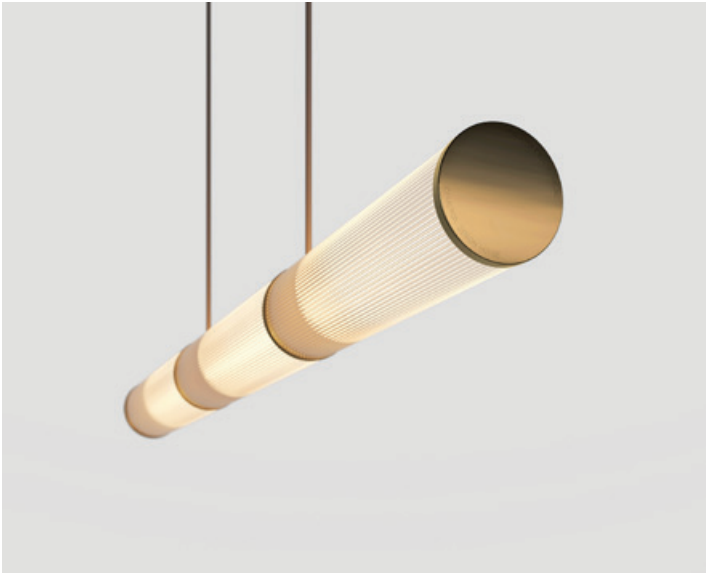

The Rokua pendant is a sleek pendant created from glass diffusers. The piece is the perfect balance of elegance and beauty, with the strength to create a statement in any space such as a boardroom table or a beautiful bar area. Bespoke options available. Integral LED lighting.

Hanging - Available in 100-300mm drop height on 3mm rods.

Light Source - Glass diffusers.
LED lights, CRI>95, ~ 50K hours life.
LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)
Power to fixtures: Via suspension rods.
Light Output: decorative lighting element only.
Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%- 100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.

Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components. Refer to instruction manual for detailed cleaning instructions.


Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.




Rokua

Direct Attach


Rokua Small
Standard dimensions:
200x16cm
79"x6.3"



Rokua Large
Standard dimensions:
300x24cm
118"x9.5"

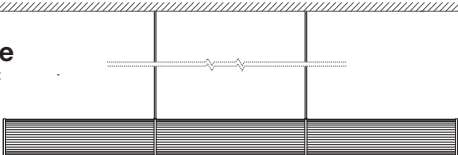

Direct attach as standard. Download our "Standard hanging options" spec for further information. Custom options available.

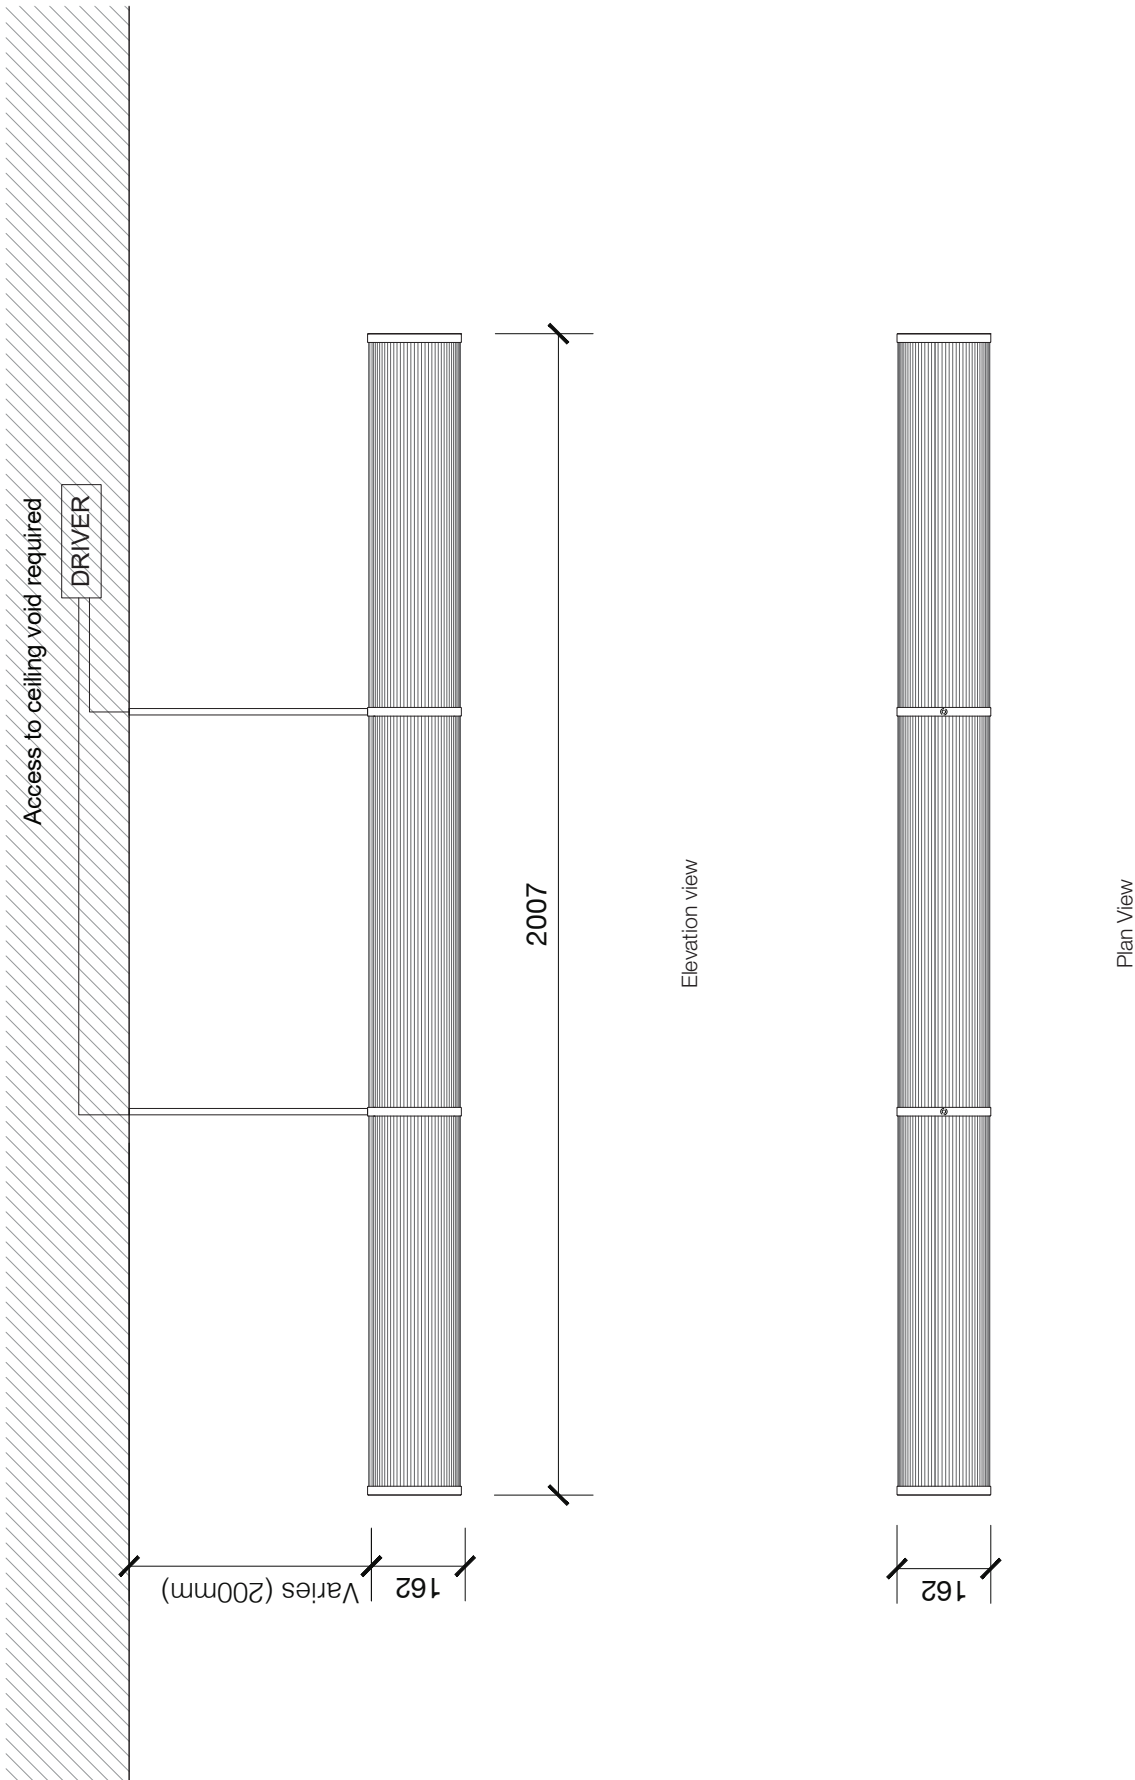



Inspired by nature, the Kotka consists of wooden fins that overlay like feathers on a bird.
 Standard profile size: 130x90mm
 Bespoke options available. From 80 to 150cm rings diameter.
 Integral decorative lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - LED tube light (replaceable), ~ 80K hours life.
 LED standard colour: 2.7k (other temperatures available)
 Power to fixtures: Via suspension cables.
 Light Output: decorative lighting element only.
 Indicative Lux level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
 Wattage dependent on sizing. Class II driver as standard.
 Output Voltage: 24V.
 Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
 All fittings and installation instructions are provided.



Maintenance
 Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.
 Refer to instruction manual for detailed cleaning instructions.

Finishes and Materials Options

English Oak




Dark Stained English Oak

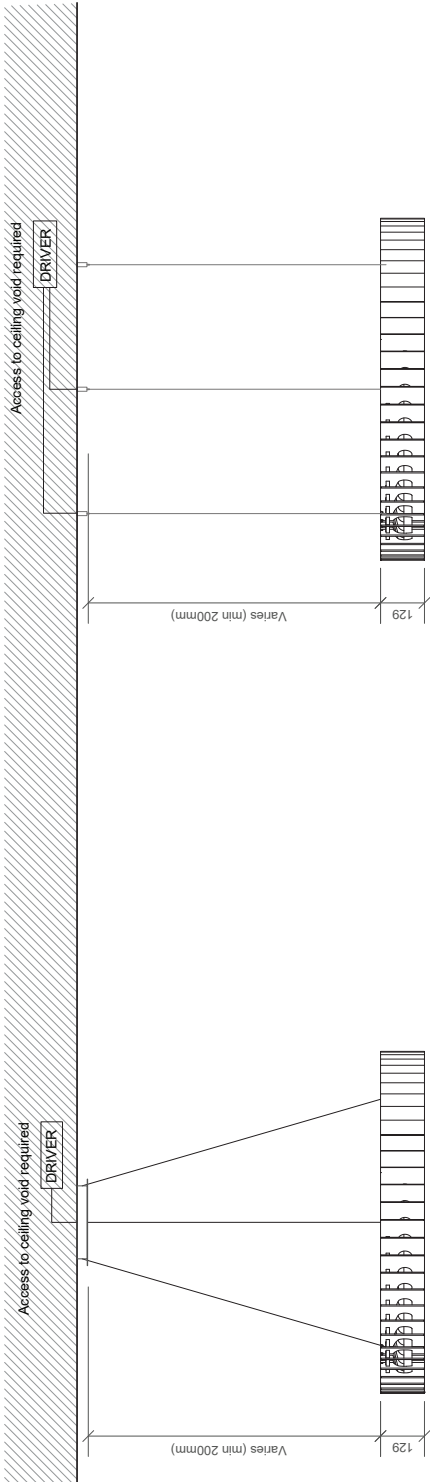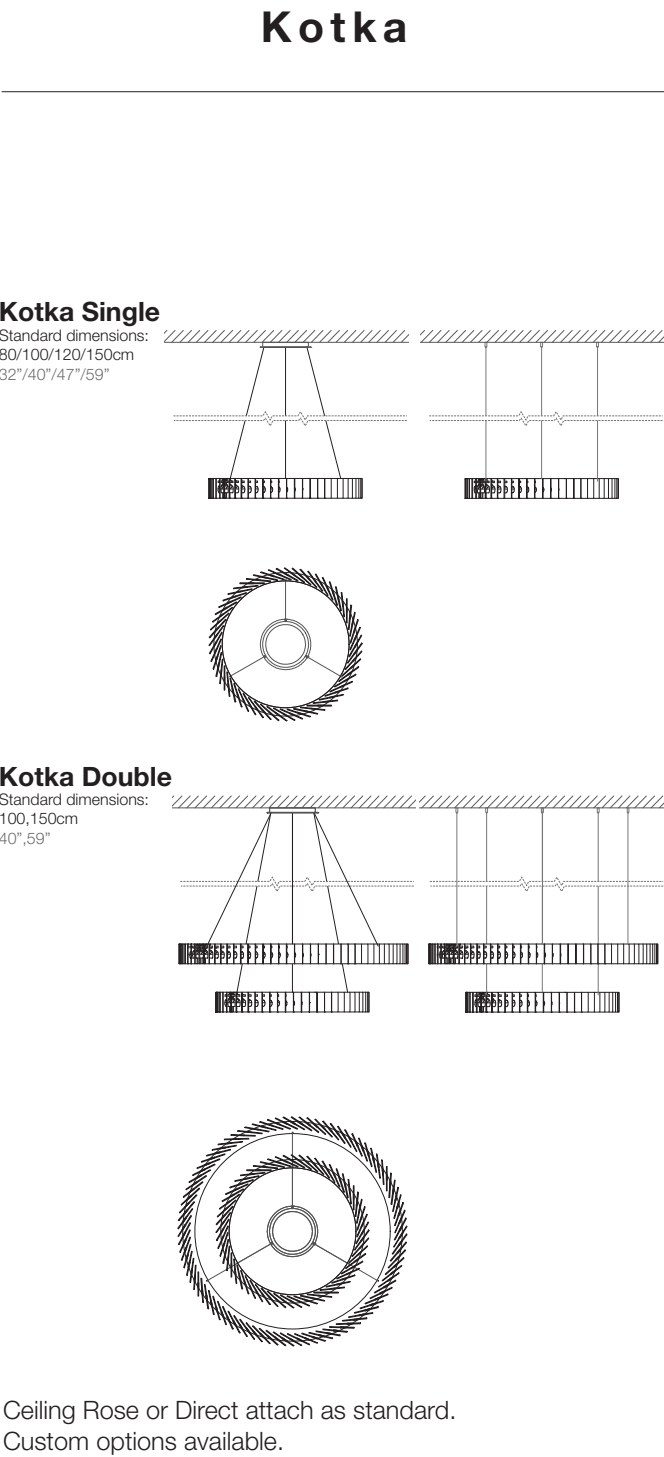


Elevation View with direct attach

Elevation View with ceiling rose

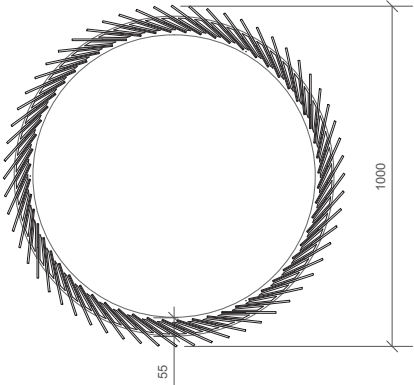

Plan View with direct attach

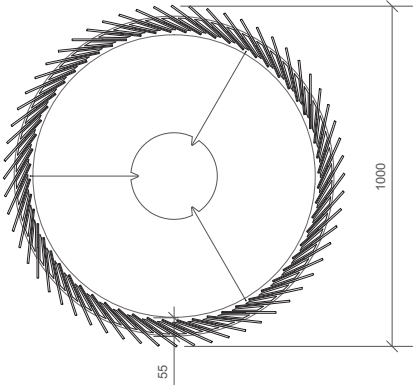

Plan View with ceiling rose



The Nivala chandelier explores the organic beauty created through the repetition of shapes. The fan effect formation of the piece means the design looks different from every angle.

Standard profile size: 120x100mm
Up to 4 tiers with rings from 40 to 150cm diameters.
Bespoke options available. Integral decorative lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - LED tube light (replaceable), ~ 12K hours life.
LED standard colour: 2.7k (other temperatures available)
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.


Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.
Refer to instruction manual for detailed cleaning instructions.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.




Nivala


Nivala Single
Standard dimensions:
80cm
32"

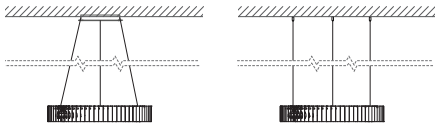


Nivala Double
Standard dimensions:
40,80cm
15.5", 32"
60,100cm
24", 40"

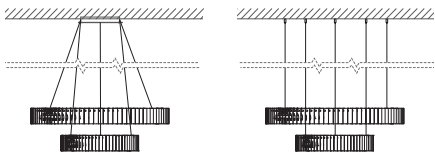


Nivala Triple
Standard dimensions:
70,110,150cm
28",43",59"

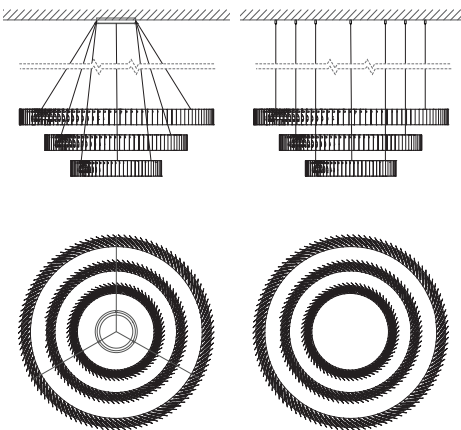

Ceiling Rose or Direct attach as standard. Download our "Standard hanging options" spec for further information.
Custom options available.

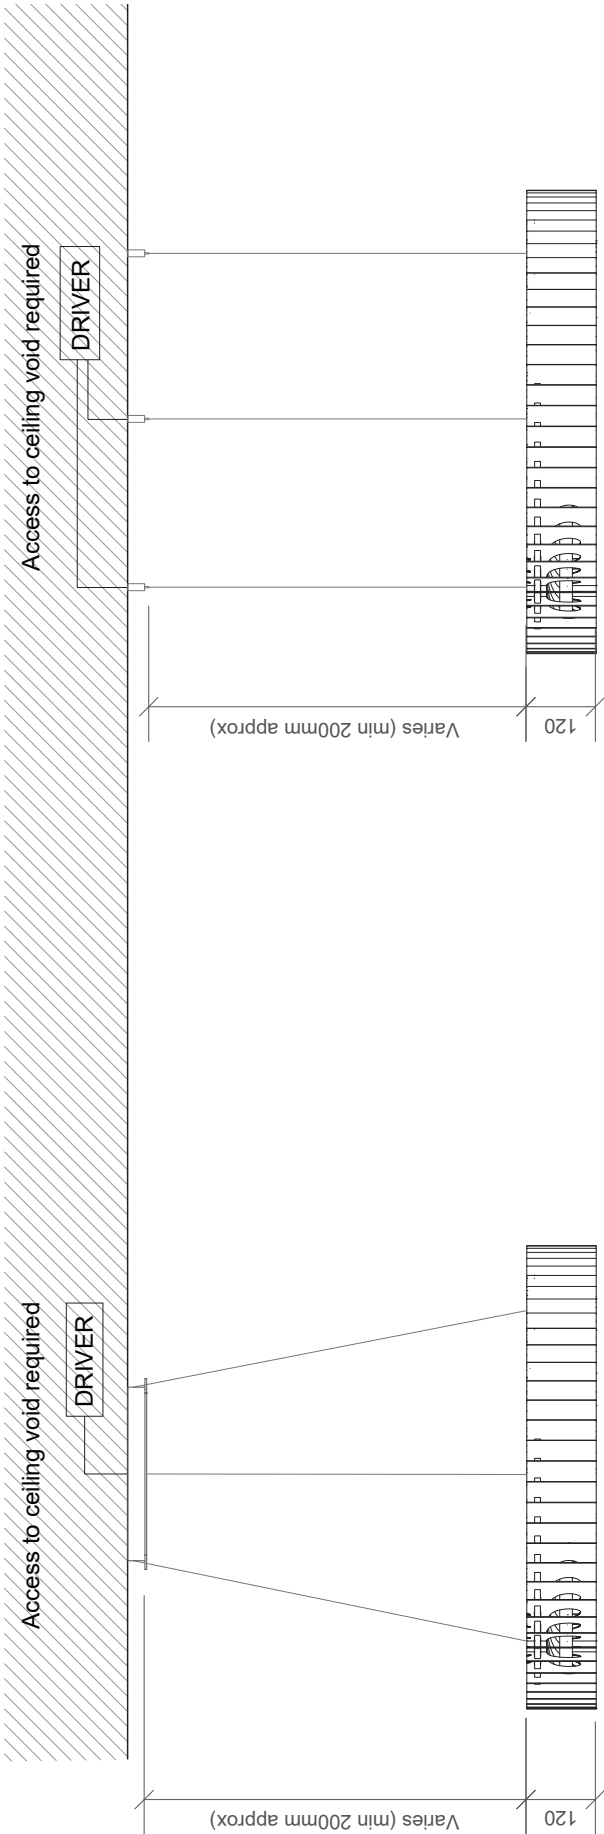


Elevation View with direct attach

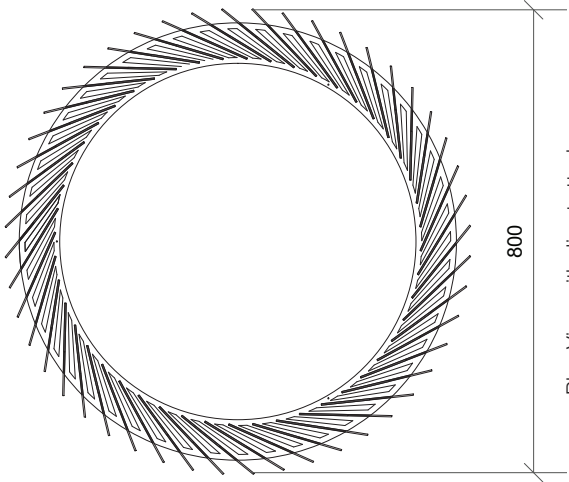

Plan View with direct attach

Elevation View with ceiling rose

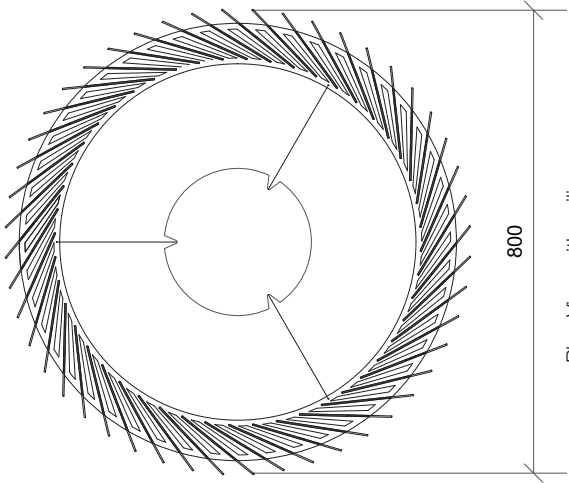

Plan View with ceiling rose





Alavus

The Alavus is a precise arrangement of extruded triangles derived from our ongoing study of the mathematical symmetry of Buckminster Fuller's geodesic dome. The perfect centrepiece in hospitality environments.
Minimum L87xW82xH25cm fixture dimension.
Made of trumpets with prism shape. G4 LED bulbs supplied.
Bespoke options available.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - G4 LED Bulbs.

LED standard colour temperature options: 2.7k, 3k or 4k
Power to fixtures: Via suspension cables.
Light Output: decorative lighting element only.
Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%- 100%) as standard, all dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.



Bespoke options and design service available.
All installation instructions are provided.

Maintenance


Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.
Refer to instruction manual for detailed cleaning instructions.

Alavus


Standard dimensions:
L87xW82xH25cm
L34"xW32"xH9.5"

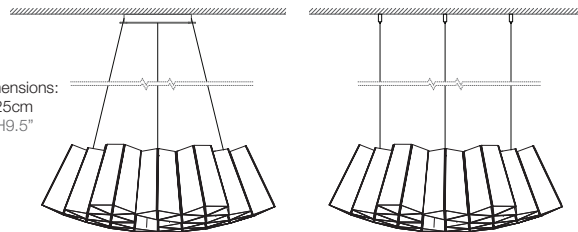

Ceiling Rose or Direct attach as standard. Download our "Standard hanging options" spec for further information.
Custom options available.

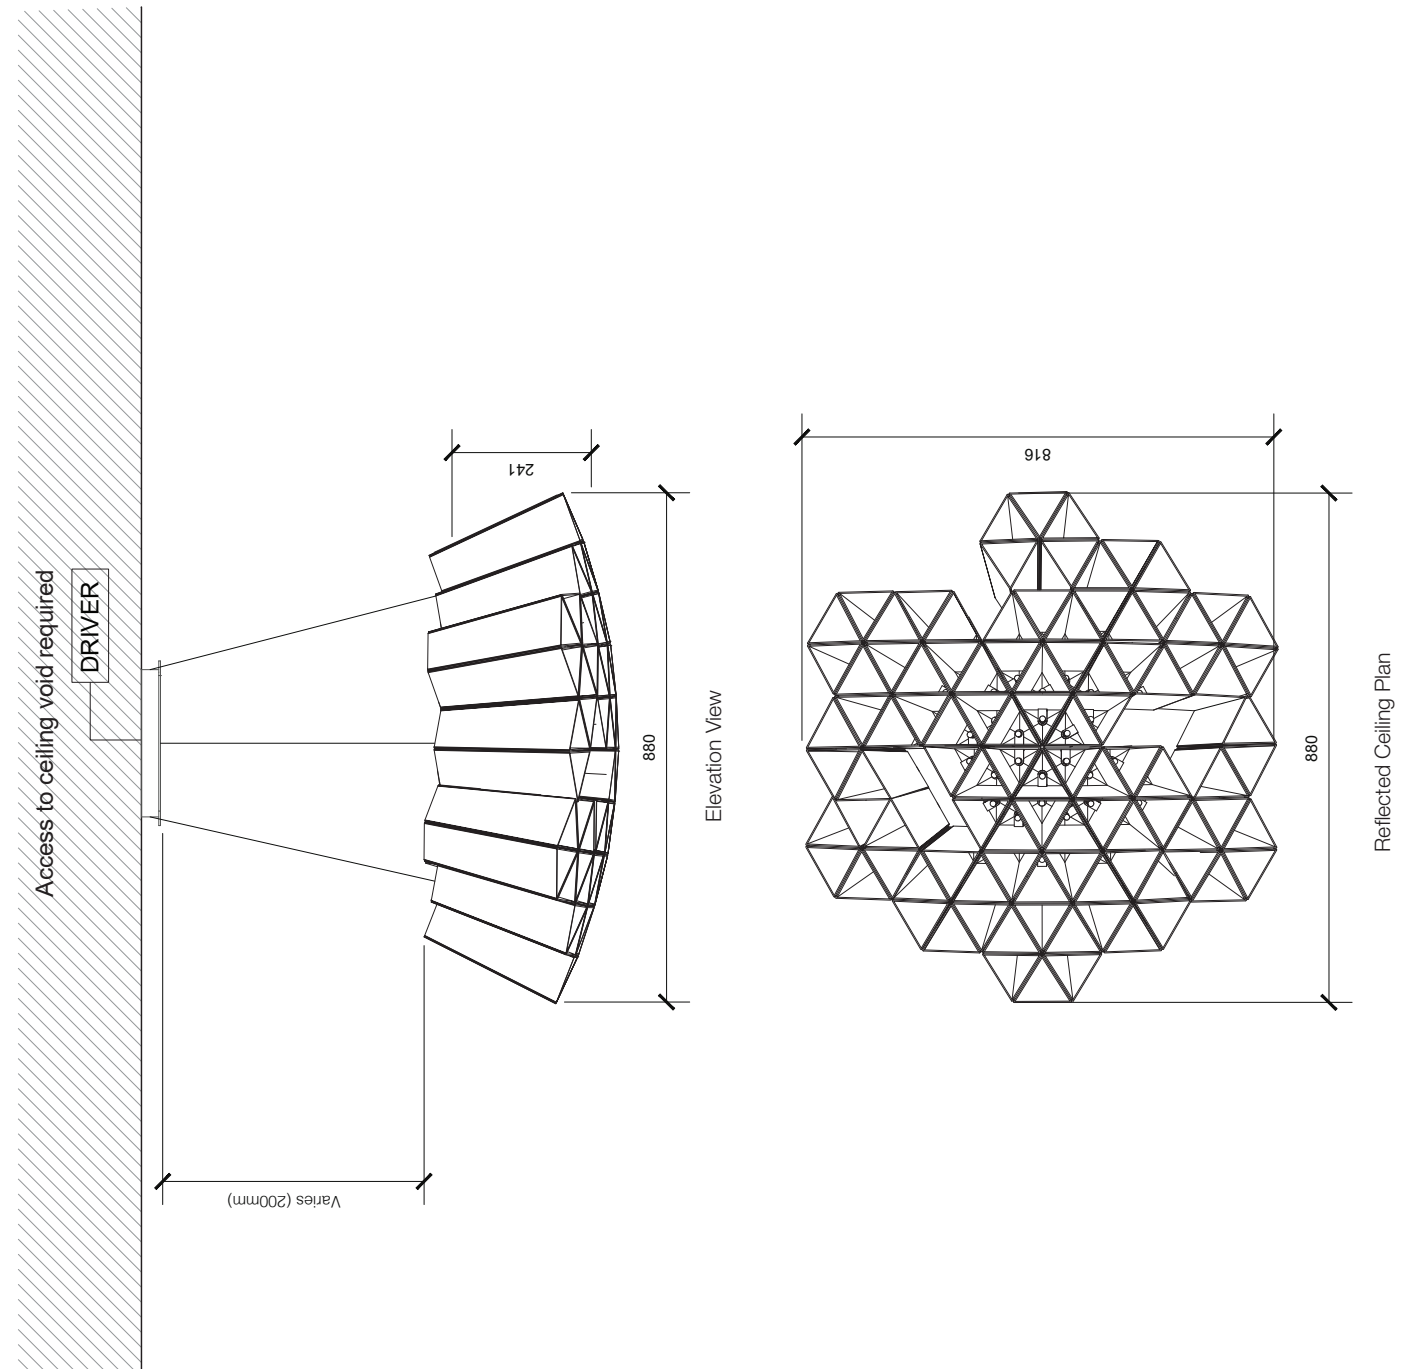

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.

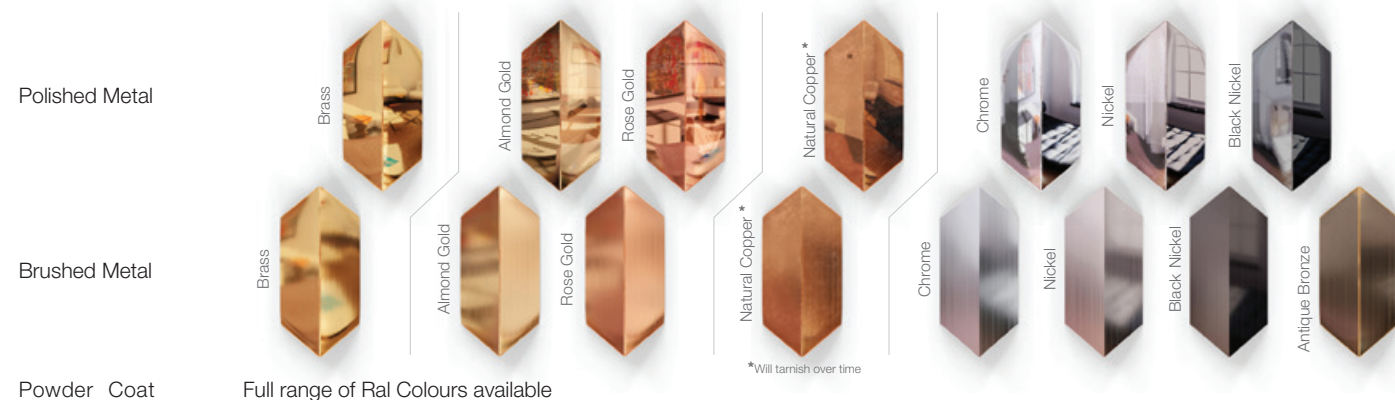





Our Helmi chandelier, made up of hand-blown glass spheres, was inspired during a fishing trip in Finland. A polished chrome industrial net displays the exquisite 'catch' of glass pearls.

Each hand-blown glass spheres up to 40cm diameter.
Bespoke options available. Integral LED lighting.

Hanging
Fully adjustable drop height on chandelier chain.

Light Source Hand-blown glass diffusers.
LED matrix, ~ 50K hours life.
LED standard colour temperature options: 3k
Power to fixtures: Via integrated power cable.

Dimming
Dimming protocols available on request.
Wattage dependent on sizing. Class II driver as standard.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.

Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.
Refer to instruction manual for detailed cleaning instructions.

Helmi



Helmi
Standard dimensions:
H160xW85cm
H63"xW33.5"

Custom hanging options available.

Finishes and Materials Options



Polished Chain

24 Carat Gold

Steel chain

Black chain

Other finishes available upon request





Inspired by the Finnish word for ‘clear’, our Kuulas chandelier focuses on making a statement through modular design. The piece exudes a sense of cultivated elegance with an industrial flair.

Each hand-blown glass spheres up to 40cm diameter. Bespoke options and various colours available. Integral LED lighting.

Hanging

Fully adjustable drop height on chandelier chain.

Light Source Hand-blown glass diffusers.

LED matrix, ~ 50K hours life.

LED standard colour temperature options: 3k

Power to fixtures: Via integrated power cable.

Dimming

Dimming protocols available on request.

Wattage dependent on sizing. Class II driver as standard.

Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.

All fittings and installation instructions are provided.

Maintenance


Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.

Refer to instruction manual for detailed cleaning instructions.

Kuulas

Kuulas

Completely customisable in dimensions and number of glass diffusers

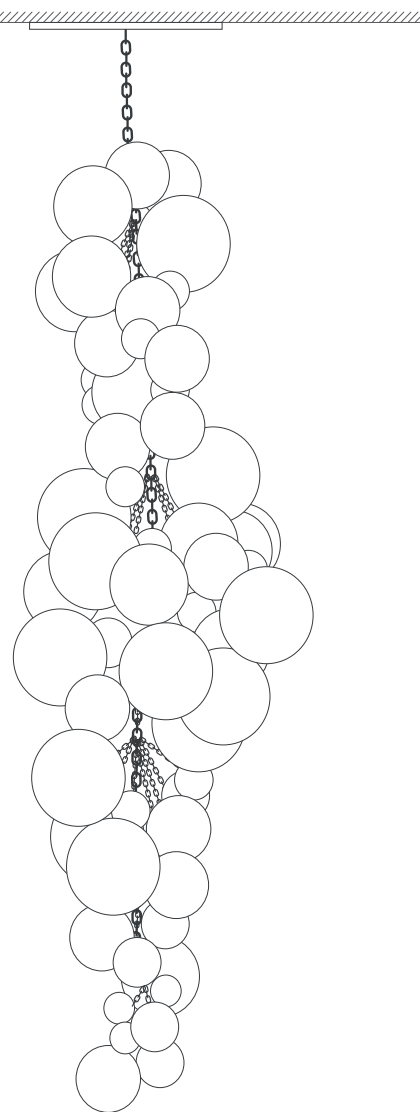


Finishes and Materials Options

24 Carat Gold


Steel chain

Black chain

Polished Chain




Other finishes available upon request

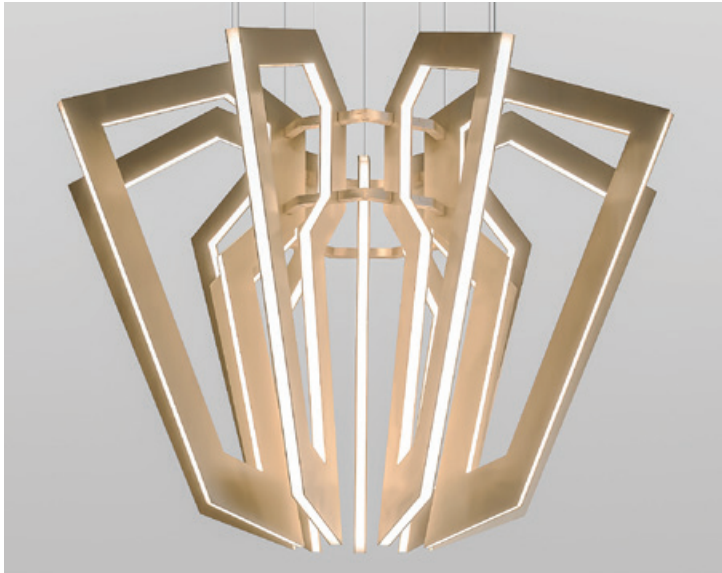

Salla


Salla 6 segments

Standard diameters:
70cm
28"

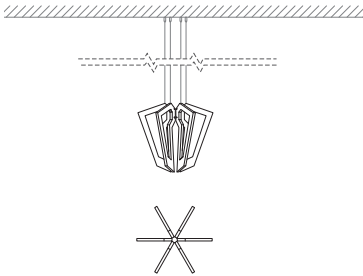

Salla 9 segments

Standard diameters:
100/130cm
40"/50"

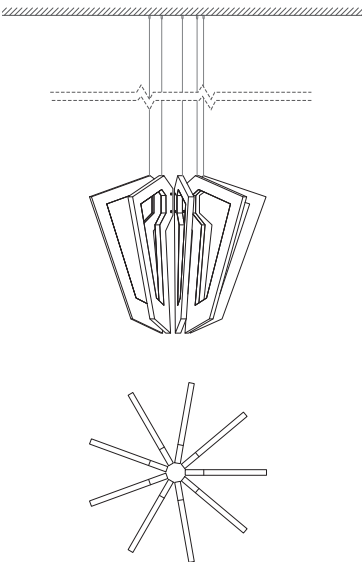

Ceiling Rose or Direct attach as standard. Download our "Standard hanging options" spec for further information. Custom options available.

The Salla is a striking multi-faceted pendant which demands attention from any angle. The piece features strong lines and strict symmetry.

Made of 6 or 9 segments, proportionally sized and customisable. Bespoke options available. Integral LED lighting.

Hanging - Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - Opal light diffusers. LED matrix, CRI>95, ~ 50K hours life. LED standard colour temperature options: 2.7k and 3k (other temperatures available on request) Power to fixtures: Via suspension cables. Light Output: decorative lighting element only. Indicative Lumen level available on request.


LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request. Wattage dependent on sizing. Class II driver as standard. Output Voltage: 24V. Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available. All fittings and installation instructions are provided.


Maintenance

Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.

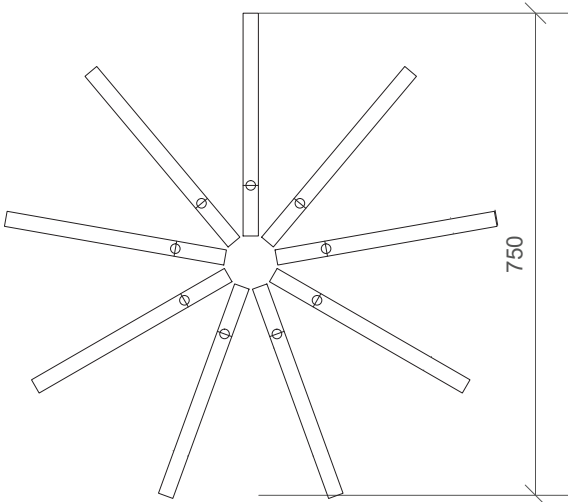

Plan view

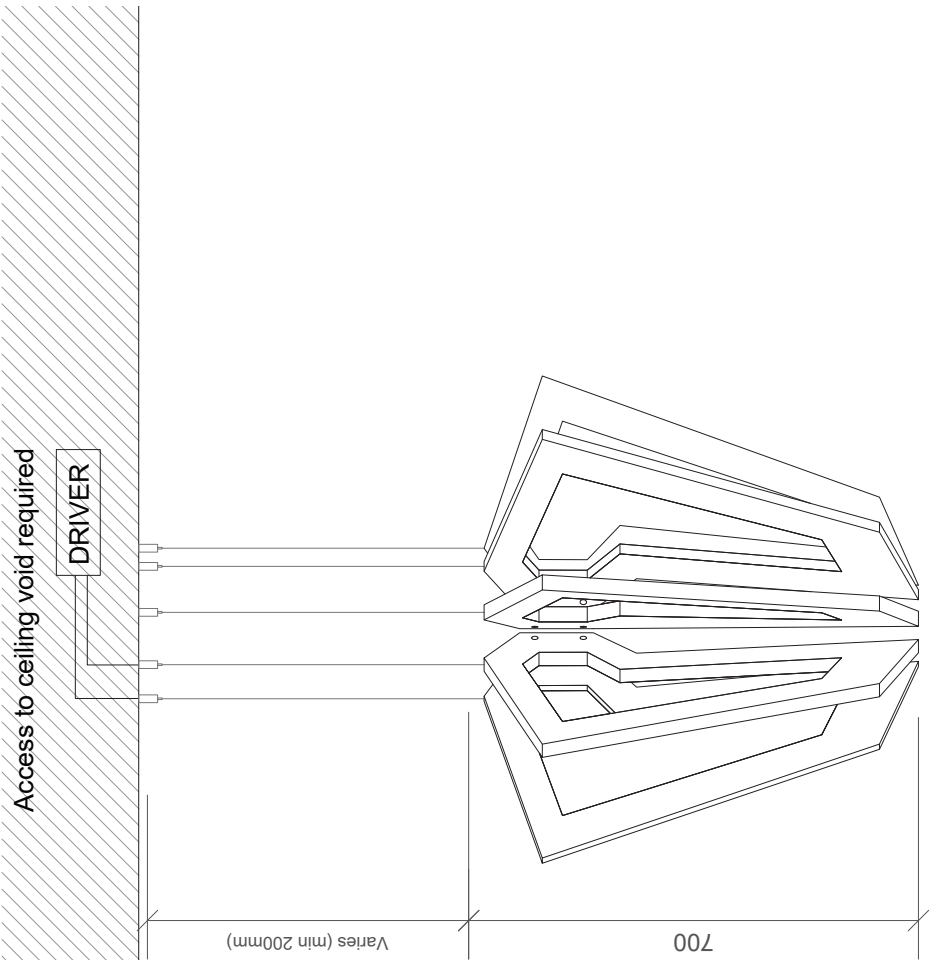


Elevation View



Vantaa

Vantaa
Standard dimensions:
120x150cm
40",59"

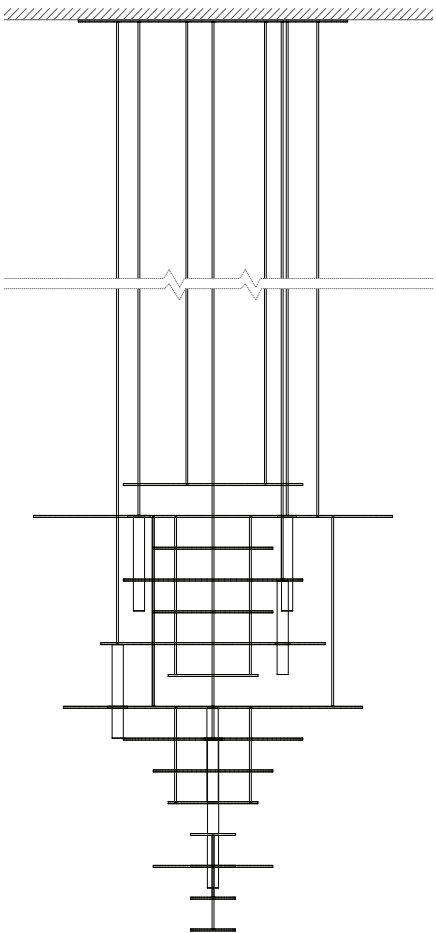

Custom hanging options available.

The Vantaa is a delicate yet bold, contemporary chandelier. It explores shape and how different forms work together to compliment one another.
Standard arrangement: 120x150cm. Up 120cm diameters.
Bespoke options available. Integral decorative lighting.

Hanging
Available in 100-300mm drop height on 3mm rods.

Light Source
Filament Bulbs or LED replacement (280mm bulbs E27 screw fit.)
Light Output: decorative lighting element only.
Indicative Lux level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
Wattage from 120W dependent on sizing.
Output Voltage: 24V.
Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
All fittings and installation instructions are provided.

Maintenance
Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.
Refer to instruction manual for detailed cleaning instructions.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.





A collaboration between innovative design duo 2LG and Cameron Design House. The challenge was to take the classic strip light and re-imagine it in a contemporary context.

Standard arrangement: 150x9cm and 100x9cm.
 Bespoke options available. Integral decorative lighting.

Hanging - Available in 100-300mm drop height on 20mm rods.


Light Source - Glass diffusers.
 LED lights, CRI>95, ~ 50K hours life.
 LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)
 Power to fixtures: Via suspension rods.
 Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.
 Wattage dependent on sizing. Class II driver as standard.
 Output Voltage: 24V.
 Input Voltage: 110V-230V-277V, to be specified.

Bespoke options and design service available.
 All fittings and installation instructions are provided.




Maintenance
 Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components.
 Refer to instruction manual for detailed cleaning instructions.

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.

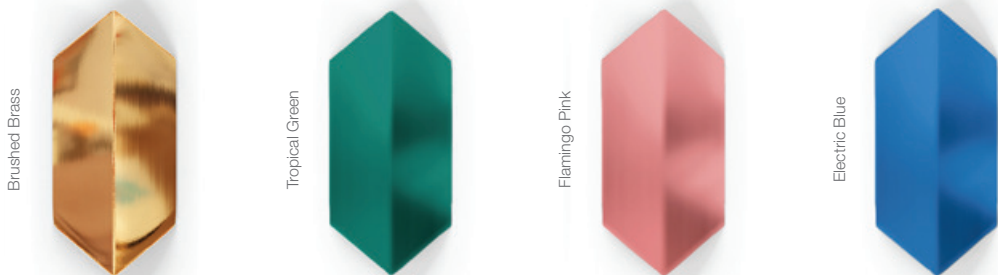

Full range of Ral Colours and metal finish available


Capsule

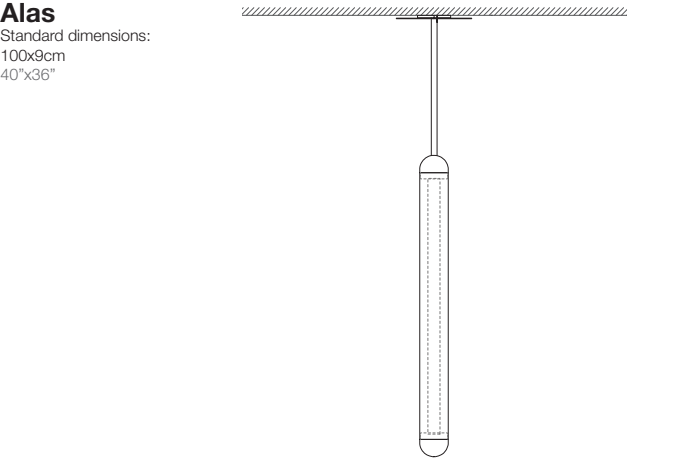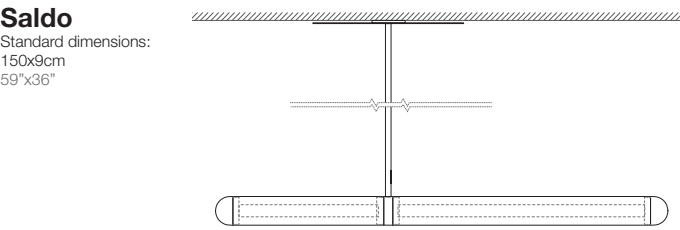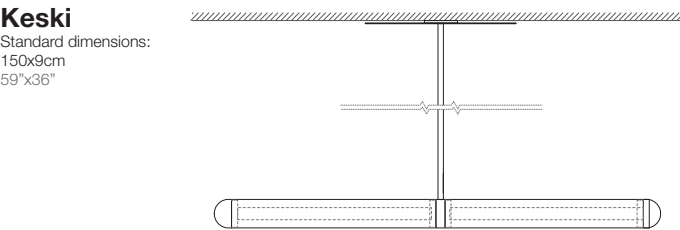

Photography © Megan Taylor


Standard Hanging Options

Flat Ceiling Rose

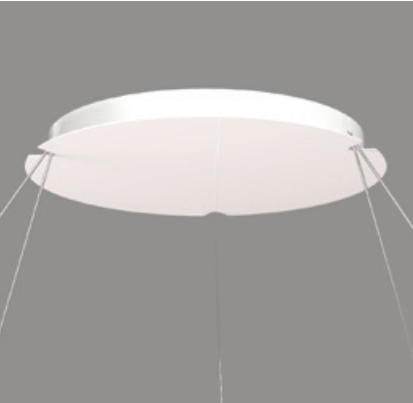


FCR small

Max. capacity: 3 rings
Standard dimensions:
25.5x3cm

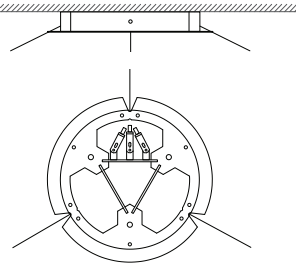

FCR large

Max. capacity: 8 rings
Standard dimensions:
33x3cm

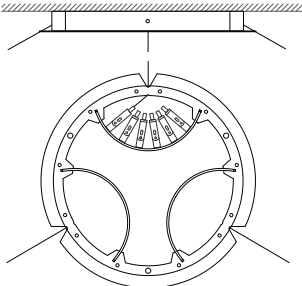


Cylindrical Ceiling Rose




CCR small

Max. capacity: 3 rings
Standard dimensions: 7.5x12cm



CCR large

Max. capacity: 6 rings
Standard dimensions:
10x15cm




Direct Attach





DA standard cable grips

Single cable grip per suspension cable
Standard dimensions: 1.5x3.5cm



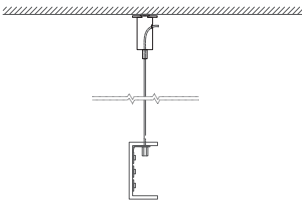




DA articulated cable grips

Single cable grip per suspension cable
Standard dimensions: 1x5.5cm

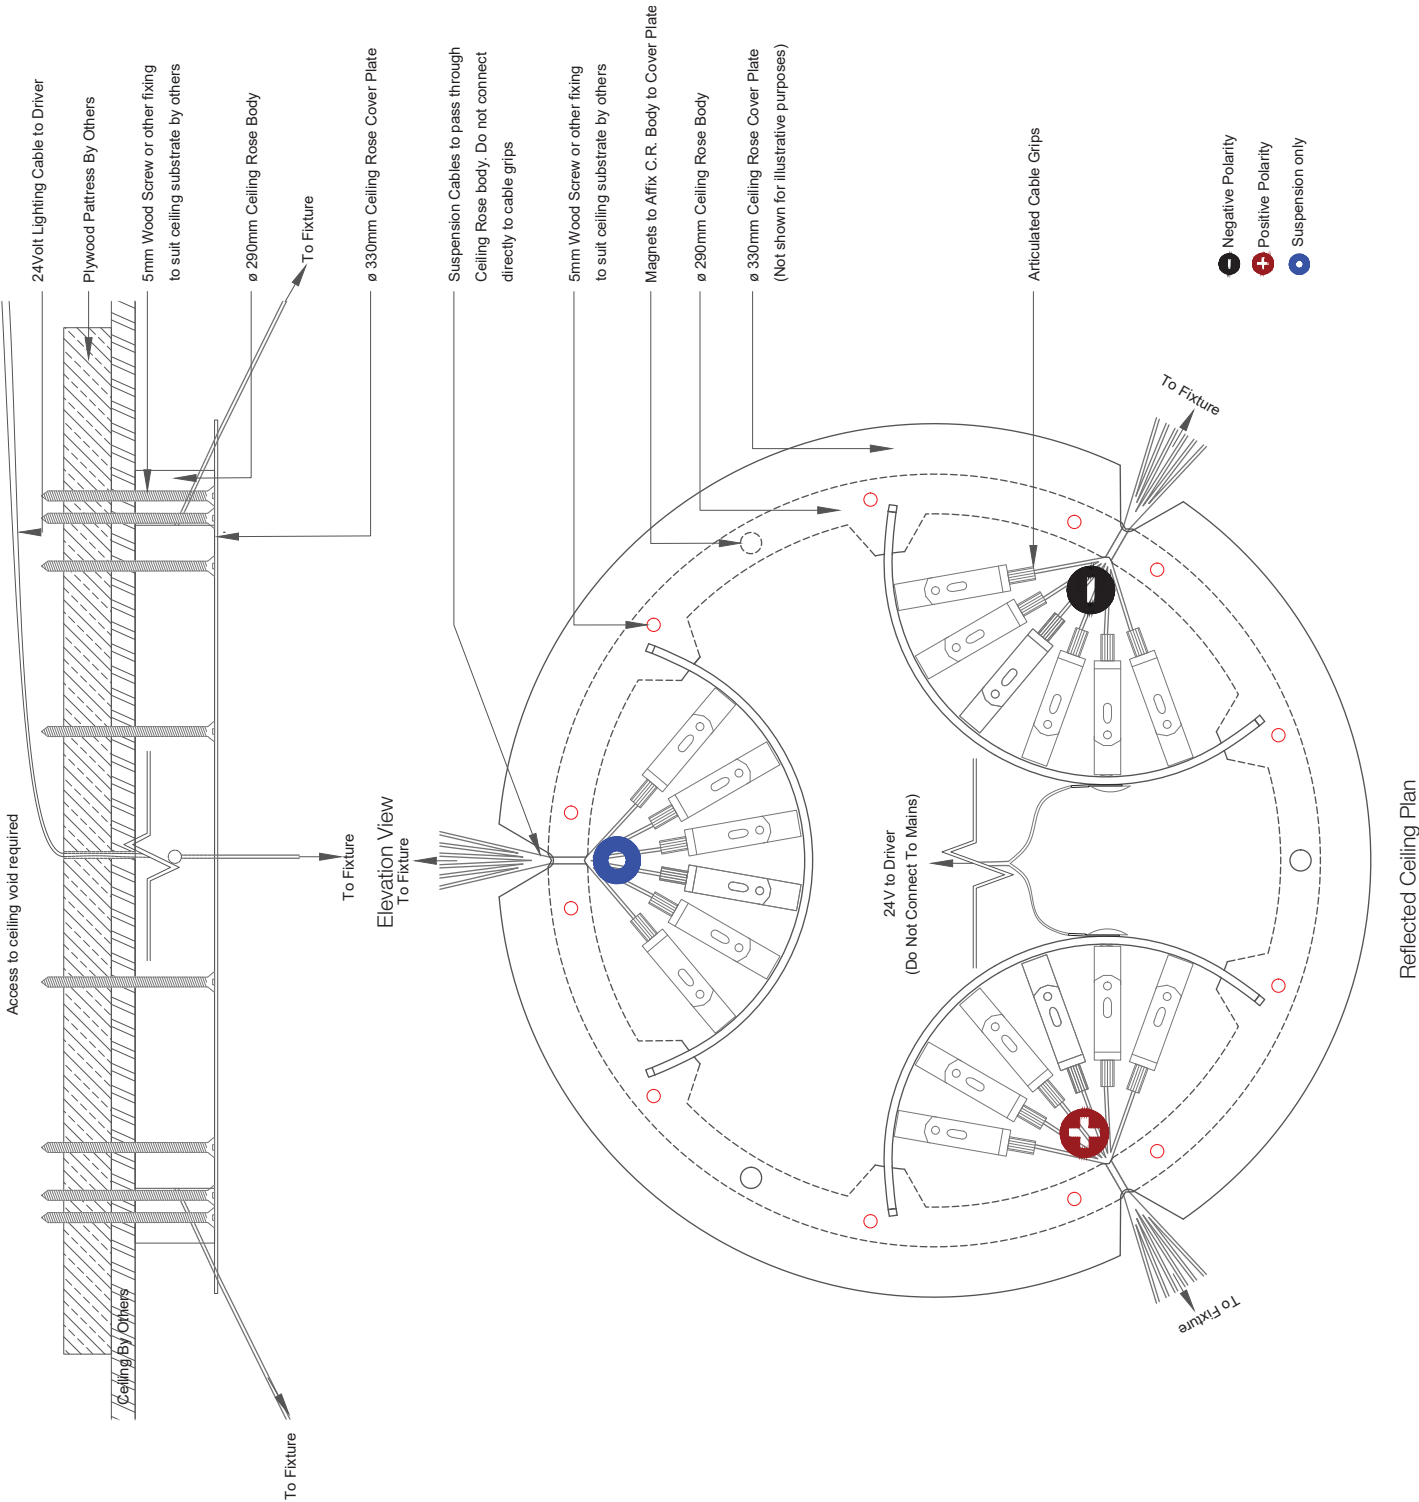

Bespoke options and design service available.

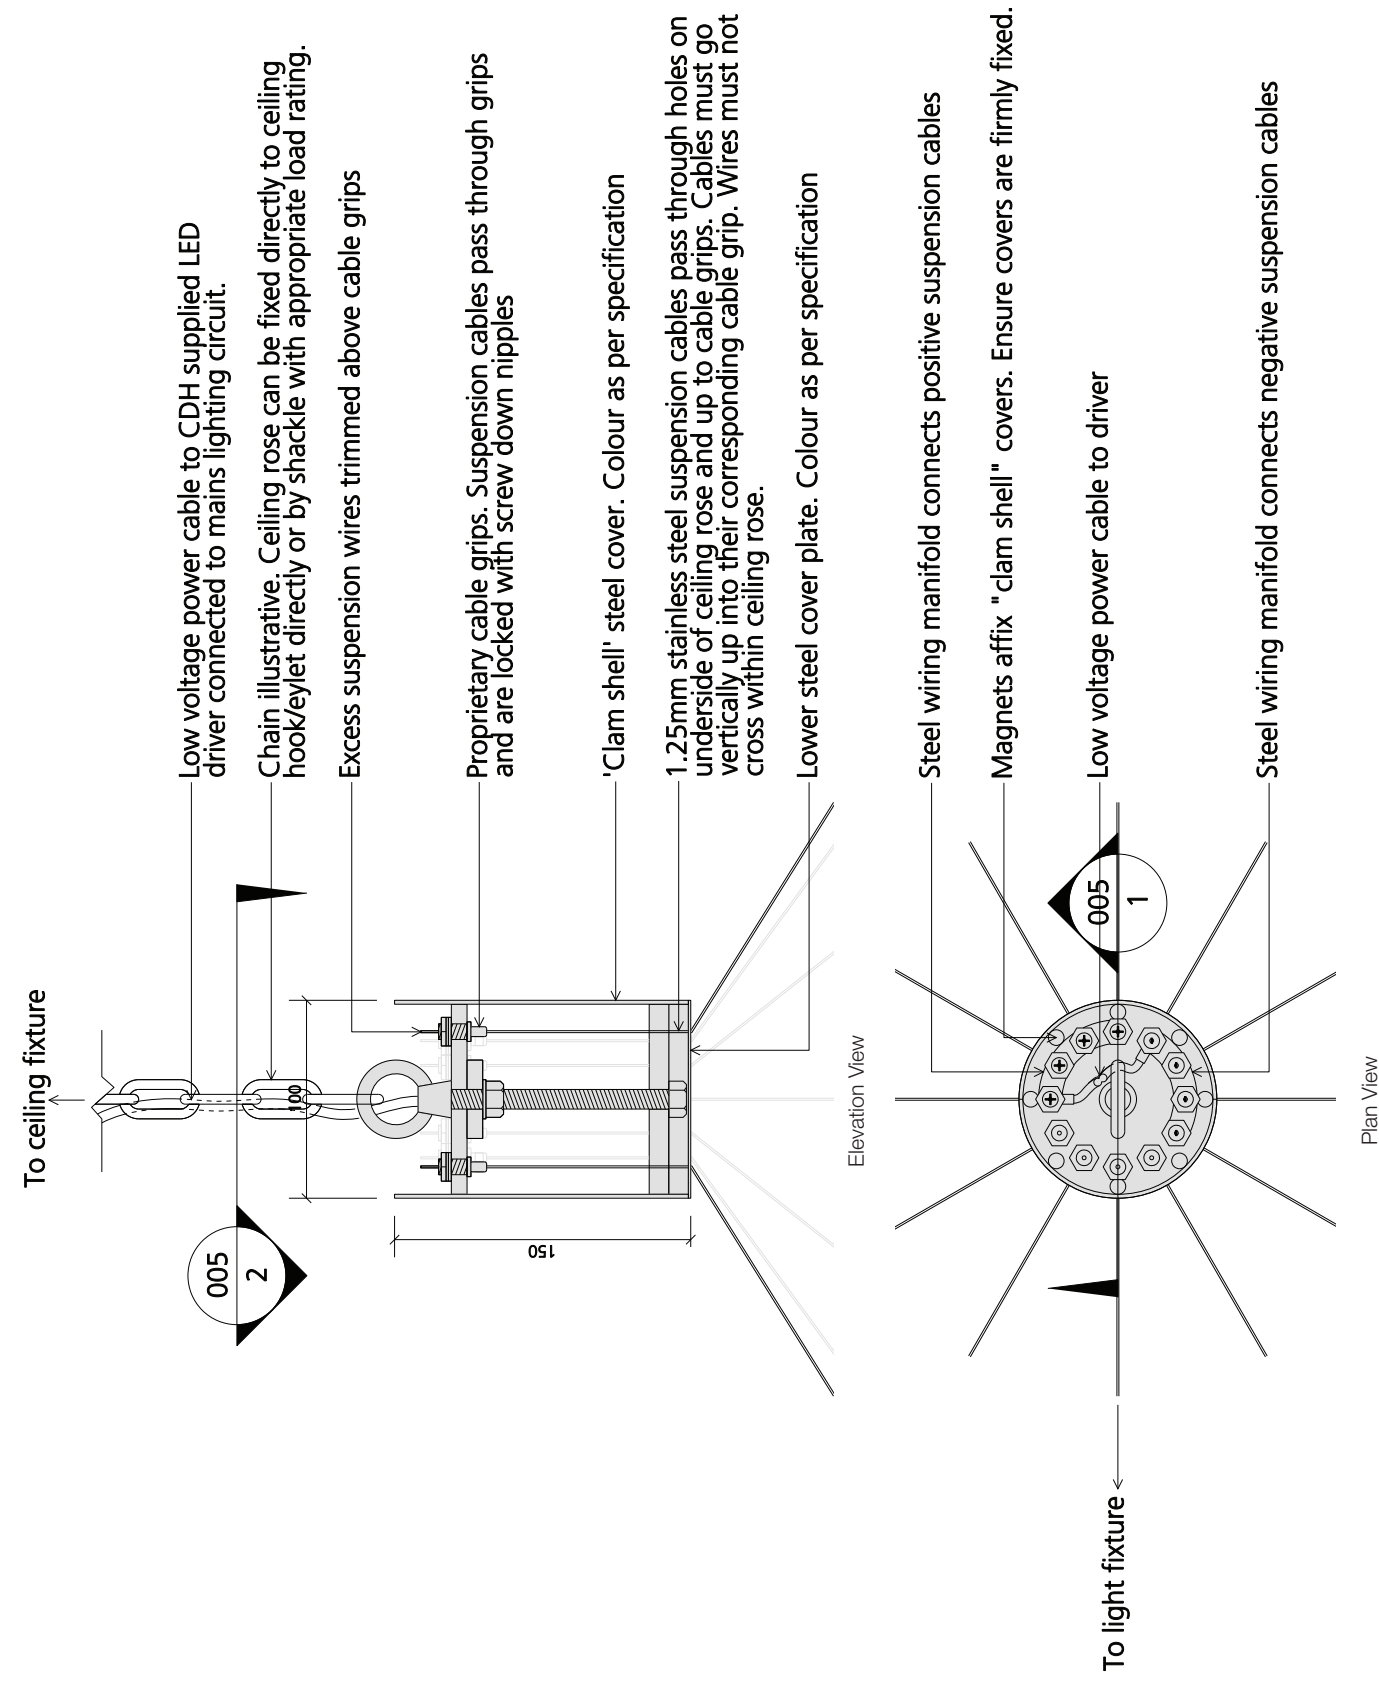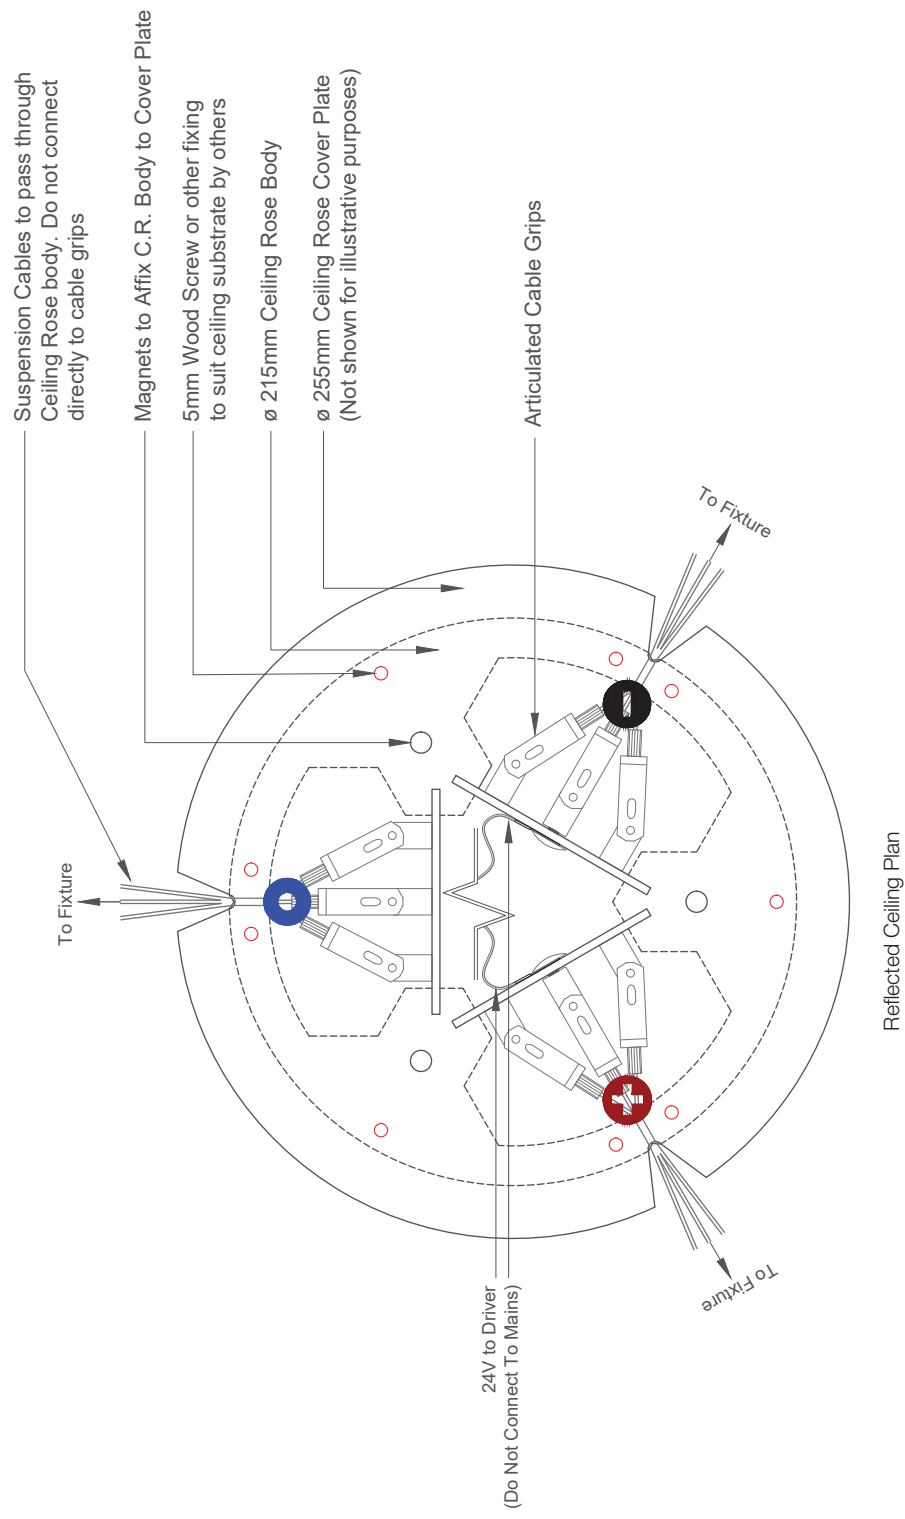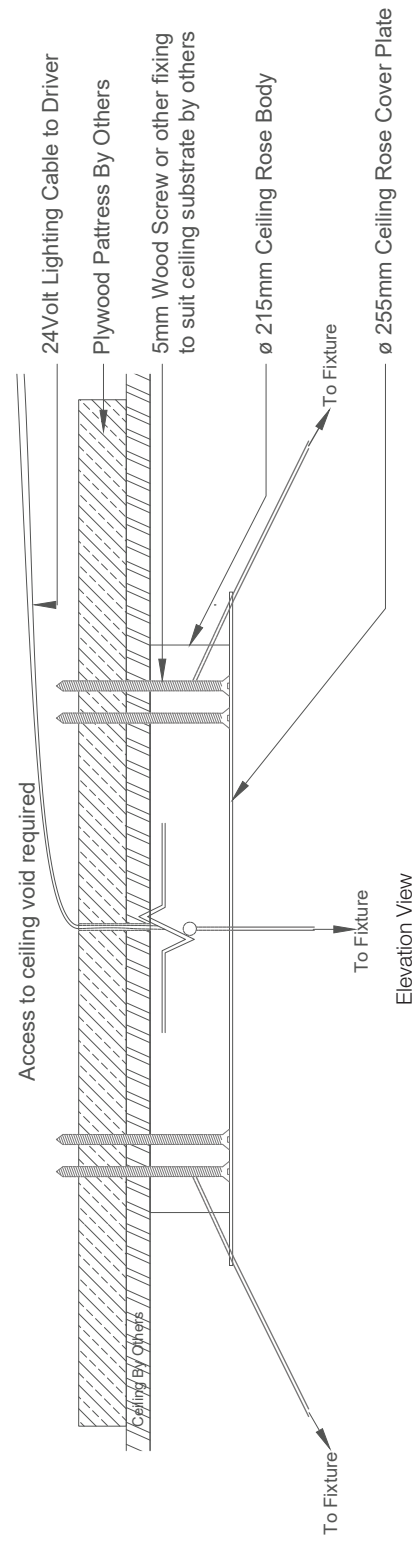

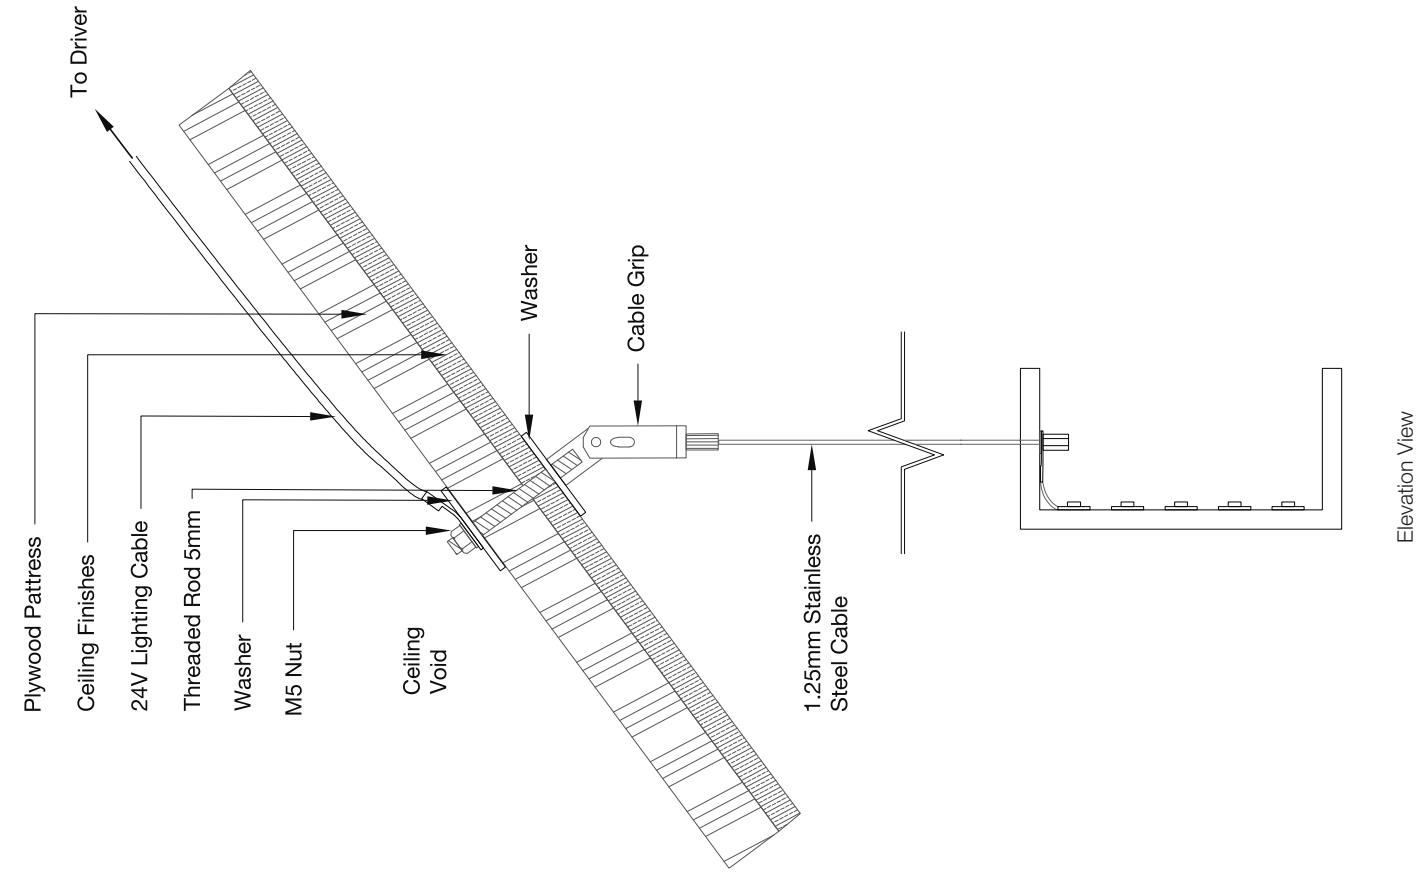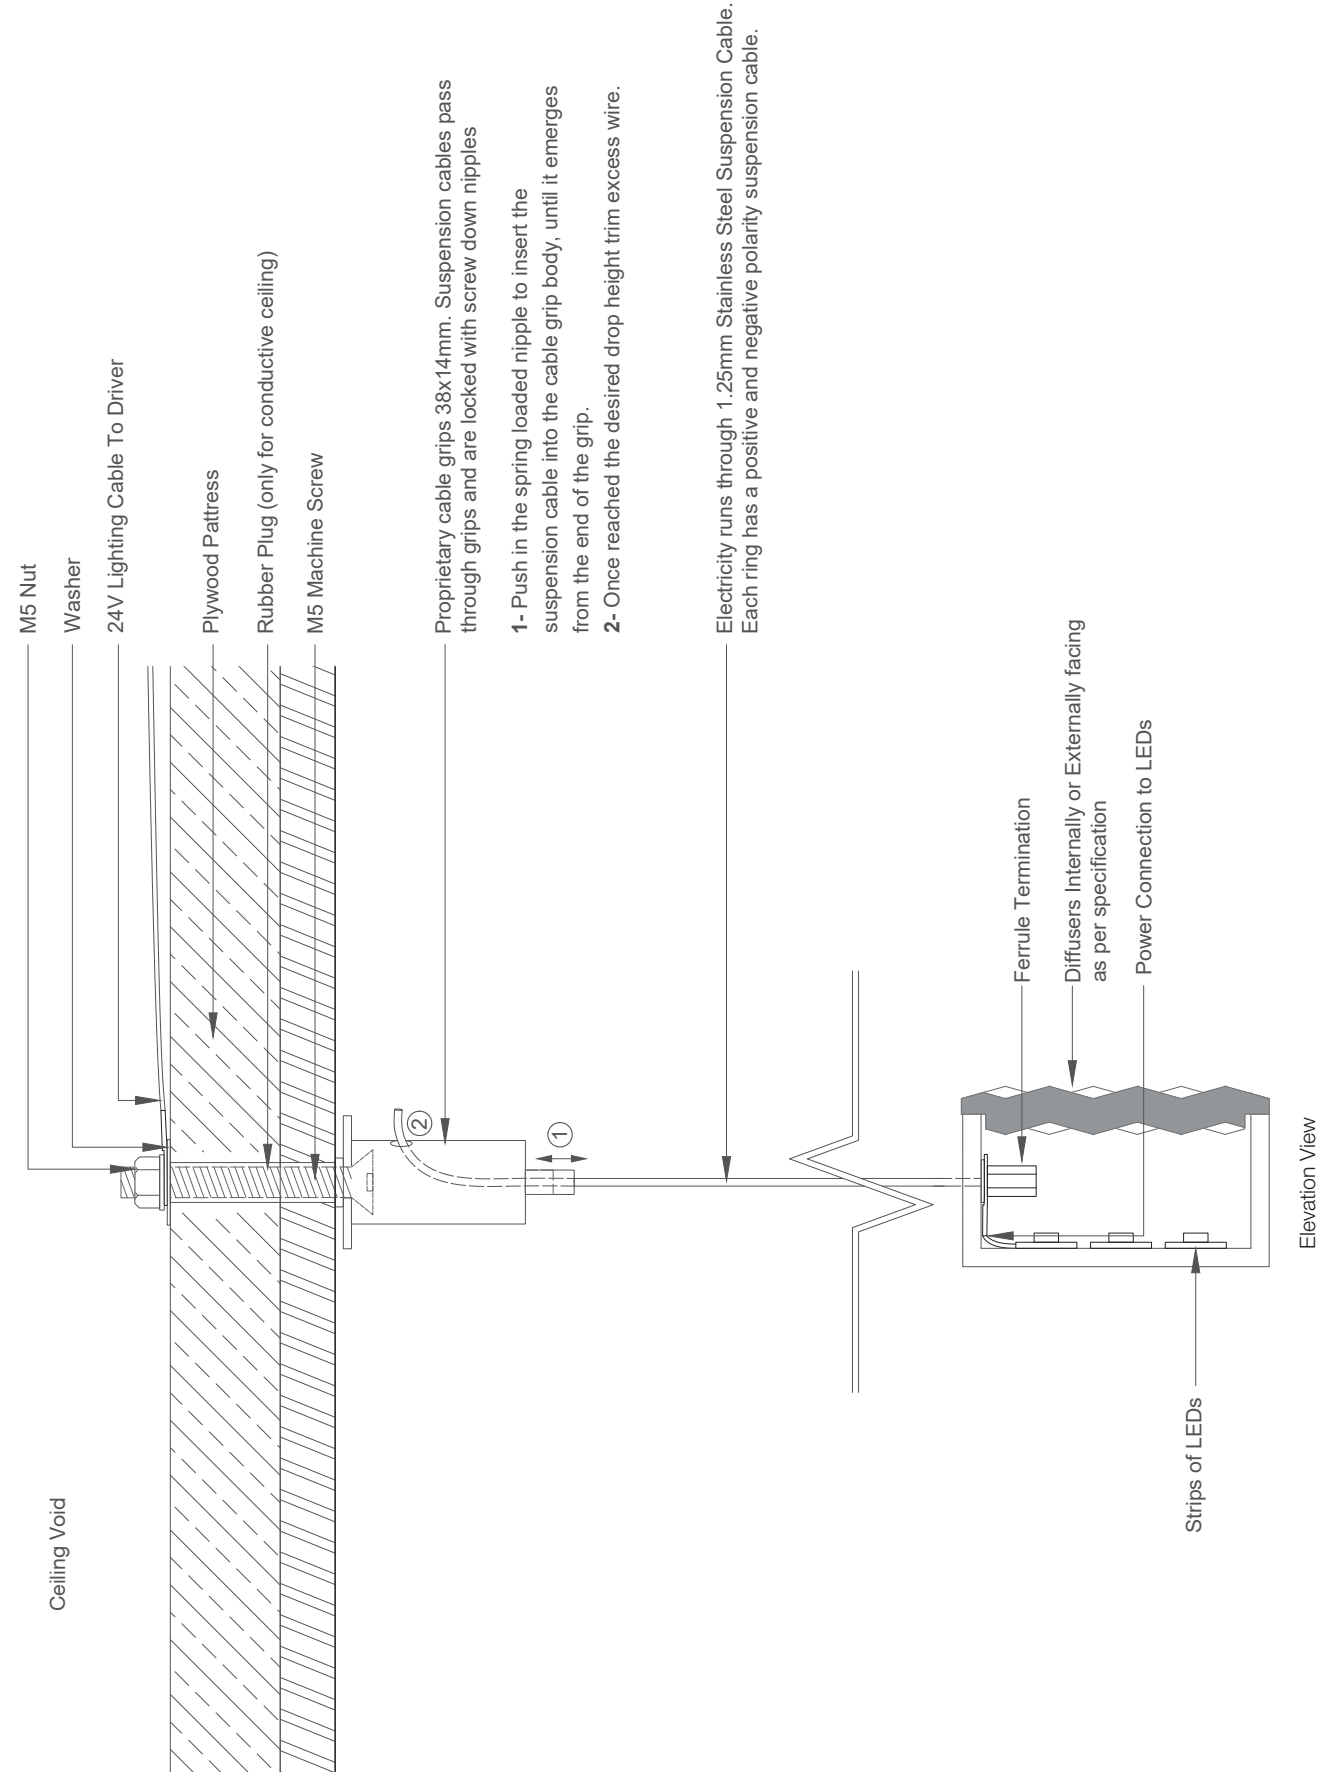


Standard Finishes


Polished Metals



Brushed Metals

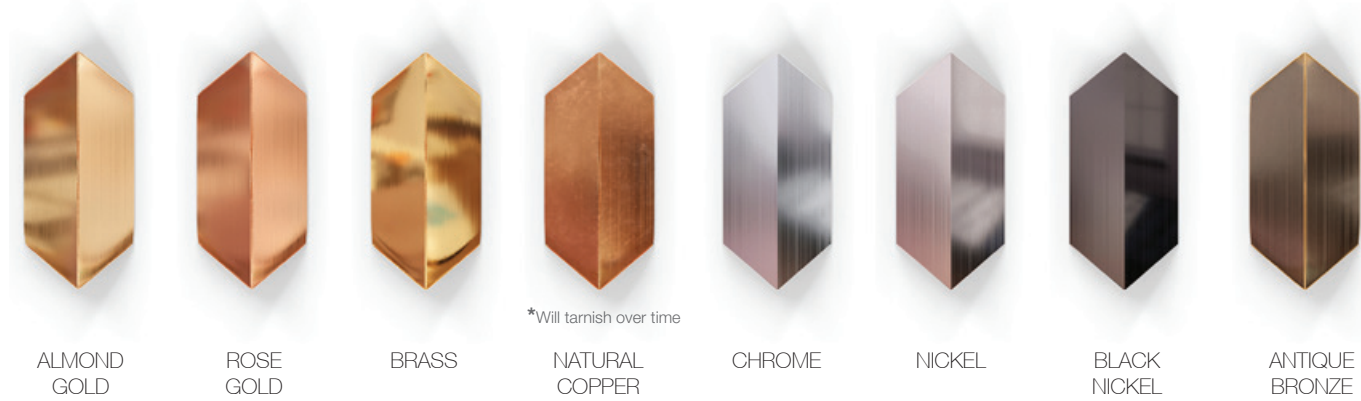

RAL colours - Full range available

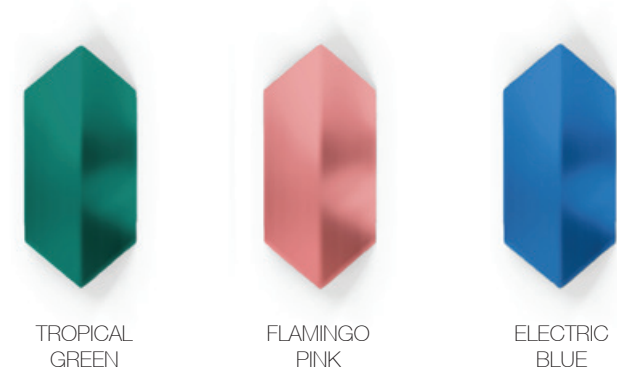

Wood finishes



Bespoke options and design service available.

Clients

J.P.Morgan

Hilton

ing INTERIOR MARKETING GROUP

Minotti LONDON

FOUNDRY

JRL MIDGARD

BARRATT HOMES

into

Chelsea Lighting NYC, LLC

SCP | Contracts

QATARI DIAR

SWATCH GROUP

TESLA

virgin atlantic

tp bennett architecture interiors planning

Berkeley Designed for life

TOMMY HILFIGER



**To make an appointment at our studio and workshop
to arrange a site visit or to discuss your project
please contact us on**

(+44) 2073 727 748

**sales@camerondesignhouse.com
technical@camerondesignhouse.com**

www.camerondesignhouse.com