

Colorful Technology Website:  
http://www.colorful.cn

Thanks for purchasing our based on Intel B250 Chipset motherboard. The motherboard C.B250A-BTC PLUS V20 based on Intel B250 Express Chipset, support Intel LGA1151 CPUs, support DDR4 2400/2133MHZ memory, support PCI-E 3.0 standard.

The motherboard provides 1\*HDMI port, 1\*LAN port, 1\*SO-DIMM memory slot, 1\*SATA3.0、4\*USB2.0 ports (including headers), onboard 1000M LAN chipset. It's a Cost-effective motherboard !

The motherboard provides 1\*PCI Express x16 slot、7\*PCI Express x1 slots、1\*MSATA slot. It's professional mining motherboard, it can connect to 8pcs graphics cards for mining.

### 1.1.Packing Contents


- ◆ 1\*Colorful C.B250A-BTC PLUS V20 motherboard
- ◆ 1\*Driver/Utility CD
- ◆ 1>User's Guide

### 1.2.MOTHERBOARD SPEC

CPU	· Support Intel LGA1151 CPUs	<b>Other Connectors</b>	<b>Onboard LAN</b>	· 1*USB2.0 header ( FUSB1 )
Chipset	· Intel B250			· 1*9-pin Front panel audio connector ( F_AUDIO )
Main Memory	· Support DDR4 2400/2133MHZ memory · Offer 1*SO-DIMM slot			· 5*FANS ( CFAN1,SFAN1,AUX_FAN1-3 )
Slots	· 1*PCI Express 3.0x16 slot · 7*PCI Express x1 slots · 1*MSATA slot			· 1*clear CMOS Jumper ( CLR_CMOS )
Storage	· 1*SATA3.0 6Gb/s port			· 1*ME header ( ME )
USB	· 4*USB2.0 ports			· 2*4-pin Power connectors ( CPU_12VIN, CPU_12VOUT )
Rear IO Connector	· 1*LAN port · 2*USB 2.0 ports · 1*HDMI Port			· 8*PCIE input power connectors ( 12V_PCIE_IN1-8 ) · 8*PCIE output power connectors ( 12V_PCIE_OUT1-8 )
				· Onboard 1000M LAN · Provides 10/100/1000Mb Ethernet

### 1.3.Motherboard Layout

- 1.Connect to USB2.0 devices
- 2.Connect to HDMI monitor
- 3.Connect to LAN
- 4.4-pin ATX Power connector
- 5.Intel LGA1151 socket
- 6.CPU Fan (CFAN) and System FAN connectors  
(SFAN1、AUX\_FAN1-3)
- 7.SO-DIMM slot
- 8.SATA3.0 port
- 9.PCI Express 3.0 x16 slot,for graphics card
- 10.PCI Express x1 slot
- 11.MSTAT slot
- 12.PCIE input power connectors  
( connect to power supply )
- 13.PCIE output power connectors  
( connect to graphics card )
- 14.USB 1.1/2.0 header
- 15.System panel connector
- 16.ME header/Clear CMOS jumper

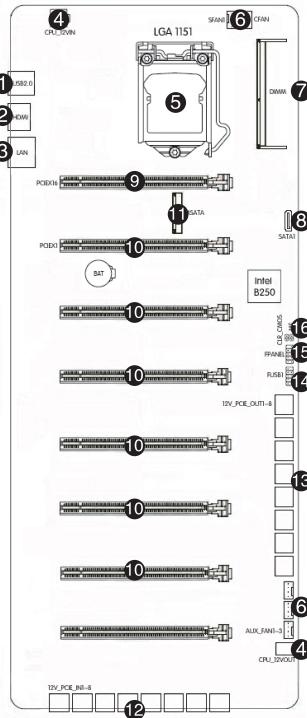

### 2.Hardware Installation

This section will guide you through the installation of the motherboard. The topics covered in this section are:

- Preparing the motherboard
  - Installing the CPU
  - Installing the CPU fan
  - Installing the memory
- Installing the motherboard
- Connecting cables and setting switches

## 2.1.Safety Instructions

To reduce the risk of fire, electric shock, and injury, always follow basic safety precautions.

Remember to remove power from your computer by disconnecting the AC main source before removing or installing any equipment from/to the computer chassis.

## 2.2.Preparing the Motherboard

The motherboard shipped in the box does not contain a CPU or memory. You need to purchase a CPU, a CPU fan assembly, and memory to complete this installation.

### 2.2.1.Installing the CPU

Be very careful when handling the CPU. Make sure not to bend or break any pins on the back. Hold the processor only by the edges and do not touch the bottom of the processor.

Use the following procedure to install the CPU onto the motherboard.

1. Unhook the socket lever by pushing down and away from the socket.
2. Lift the load plate. There is a protective socket cover on the load plate to protect the socket when there is no CPU installed.
3. Remove the protective socket cover from the load plate.
4. Remove the processor from its protective cover, making sure you hold it only by the edges.






It is a good idea to save the cover so that whenever you remove the CPU, you have a safe place to store it.

5. Align the notches in the processor with the notches on the socket.
6. Lower the processor straight down into the socket without tilting or sliding it into the socket

Make sure the CPU is fully seated and level in the socket.

7. Close the load plate over the CPU and press down while you close and engage the socket lever.

There are many different fan types that can be used with this motherboard. Follow the instruction that came with your fan assembly. Be sure that the fan orientation is correct for your chassis type and your fan assembly.




The CPU fits in only one correct orientation. DO NOT force the CPU into the socket to prevent bending the connectors on the socket and damaging the CPU!

## 2.3. Installing Memory DIMM

Your new motherboard has 1 slots for SO-DIMM memory. They support DDR4 memory technology. There must be at least one memory bank populated to ensure normal operation. Use the following recommendations for installing memory.

- ✓ Install into DIMM: You only can install the DIMM into this slot.

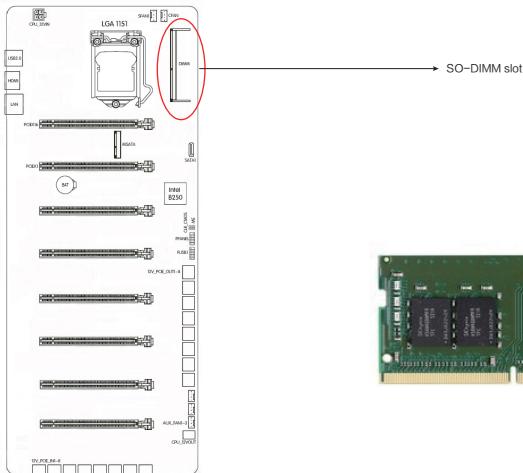

## 2.4. Installing the Motherboard

The sequence of installing the motherboard into the chassis depends on the chassis you are using and if you are replacing an existing motherboard or working with an empty chassis. Determine if it would be easier to make all the connections prior to this step or to secure the motherboard and then make all the connections. Use the following procedure to install the I/O shield and secure the motherboard into the chassis.

Be sure that the CPU fan assembly has enough clearance for the chassis covers to lock into place and for the expansion cards. Also make sure the CPU Fan assembly is aligned with the vents on the covers.

## 2.5.Securing the Motherboard into the Chassis

Most computer chassis have a base with mounting studs or spacers to allow the mother board to be secured to the chassis and help to prevent short circuits. If there are studs that do not align with a mounting hole on the motherboard, it is recommended that you remove that stud to prevent the possibility of a short circuit.

- 1.Carefully place the motherboard onto the studs/spacers located inside the chassis.
- 2.Align the mounting holes with the studs/spacers.
- 3.Ensure that the fan assembly is aligned with the chassis vents according to the fan assembly instruction.
- 4.Secure the motherboard with a minimum of eight-to-ten screws.


## 2.6.Connecting Cables and Setting Switches

This section takes you through all the connections and switch settings necessary on the motherboard. This will include:

- Power Connections
  - 4-pin ATX 12V power
- Internal Headers
  - Front panel
  - USB Headers
- Serial ATA III
- Chassis Fans
- Rear panel USB 2.0 Adapter
- Expansion slots


### 2.6.1.MSATA slot

This slot connect to MSATA hard disk drives, the maximum support 6 gb/s transmission rate.

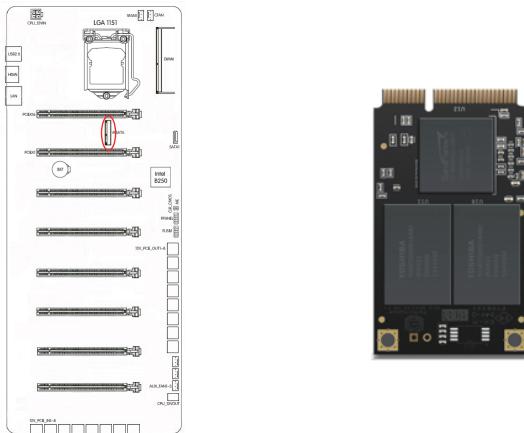


## **2.6.2.Power connectors:CPU\_12VIN, CPU\_12VOUT (4-pin ATX12V)**

These connectors are for an ATX power supply. Along with the goods will configure a power cable, Before start, please find the power cable,then insert the power cable ends on the two 4 – pin connectors respectively.

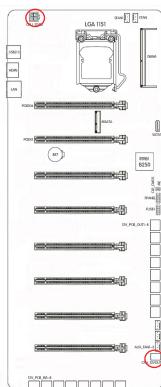


## **2.6.3.Serial ATA 3.0/6.0 Gb/s connectors (7-pin)**

These connectors connect to Serial ATA 3.0/6.0 Gb/s hard disk drives and optical drives via Serial ATA 3.0/6.0 Gb/s signal cables.

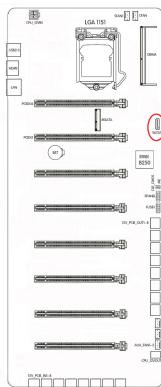



## 2.6.4. Back Panel IO Connector

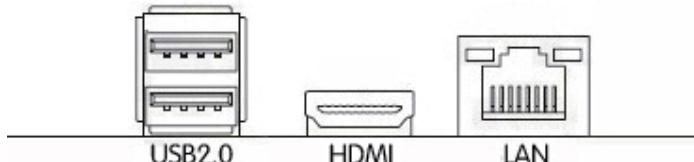

Parts	Use
LAN Jack	The standard RJ-45 jack is for connection to single Local Area Network (LAN). You can connect a network cable to it
HDMI	Onboard HDMI port, connect to HDMI Monitor
USB Ports	These connectors are for attaching USB devices such as keyboard, mouse, or other USB-compatible devices.


## 2.6.5. USB2.0 connectors:FUSB1

These connectors are for USB 2.0 ports. Connect the USB module cable to any of these connectors, then install the module to a slot opening at the back of the system chassis. These USB connectors comply with the USB 2.0 specification that supports up to 480Mbps connection speed.

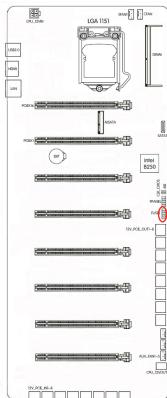

## 2.6.6. System panel connector

This connector supports several chassis-mounted functions.

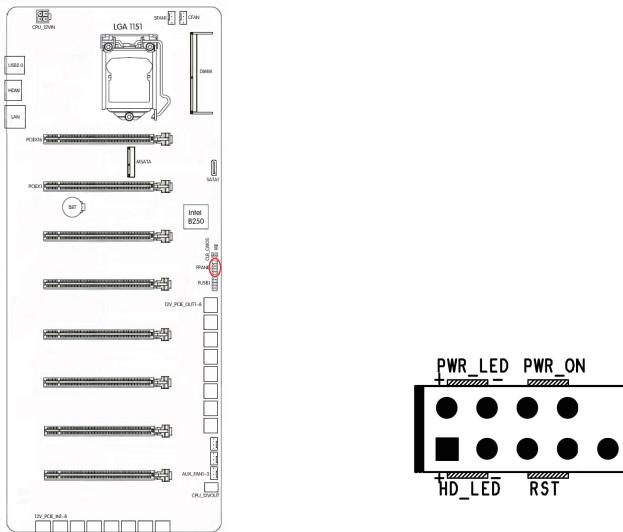

### System power LED (2-pin PLED)

This 2-pin connector is for the system power LED. Connect the chassis power LED cable to this connector. The system power LED lights up when you turn on the system power, and blinks when the system is in sleep mode.

### Hard disk drive activity LED (2-pin IDE\_LED)

This 2-pin connector is for the HDD Activity LED. Connect the HDD Activity LED cable to this connector. The IDE LED lights up or flashes when data is read from or written to the HDD.

### System warning speaker (4-pin SPEAKER)

This 4-pin connector is for the chassis-mounted system warning speaker. The speaker allows you to hear system beeps and warnings.

### ATX power button/soft-off button (2-pin PWRSW)



This 2-pin connector is for the system power button.

### Reset button (2-pin RESET)

This 2-pin connector is for the chassis-mounted reset button for system reboot without turning off the system power.

## 2.6.7.CPU, Chassis, and Power fan connectors (4-pin CPU\_FAN, 3-pin PWR\_FAN)

Connect the fan cables to the fan connectors on the motherboard, making sure that the black wire of each cable matches the ground pin of the connector.

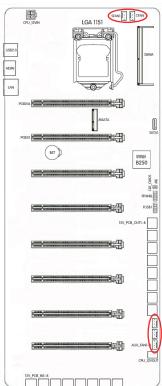


## 2.6.8.PCI Express x16 Slots

The PCI Express x16 slot is reserved for a graphics or video card. The bandwidth of the x16 slot is up to 8GB/sec.

When installing a PCI Express x16 card, be sure the retention clip snaps and locks the card into place. If the card is not seated properly, it could cause a short across the pins. Secure the card's metal bracket to the chassis back panel with the screw used to hold the blank cover.


(warm prompt: when you want to set up 8 graphics card for mining, it is recommended to use WIN10 1703 version system, 8 Gb of memory.)

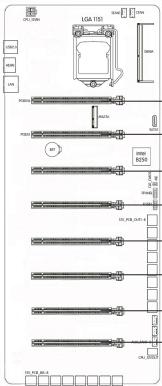

PCI Express x16  
PCI Express x1  
PCI Express x1

## **2.6.9.Clear CMOS Jumper: CLR\_CMOS**


There is a CMOS RAM on board that has a power supply from external battery to keep the system configuration data. With the CMOS RAM, the system can automatically boot OS every time it is turned on. If you want to clear the system configuration, use the CLR\_CMOS Jumper to clear data.



### **Clear CMOS PROCEDURE**

You can clear CMOS by shorting 1~2 pin. Before you clearing the CMOS, following next procedure:

- 1.Turn off the AC power supply and connect pins 1 and 2 together using the jumper cap.
- 2.Return the jumper setting to normal (pin 2) or Remove the jumper cap
- 3.Turn the AC power supply back on.

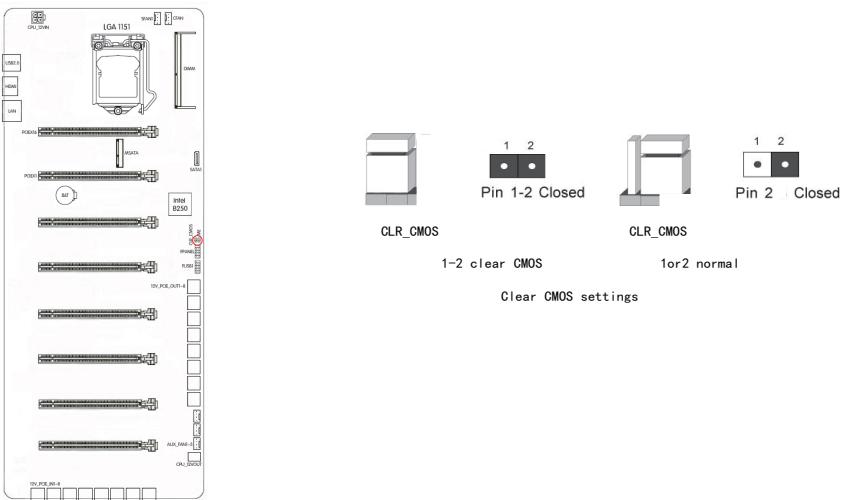

## **Entering BIOS Setup**

Power on the computer and the system will start the Power On Self Test (POST)process. When the message below appears on the screen, press <DEL> key to enter BIOS:

Press DEL to Run Setup,Press F2 to Load default values and continue

### **Boot Option Priorities ( how to install operating system )**

Boot device Priority Setting. If user will install operating system, please put "Boot Option #1" set to your CD-ROM or your USB device, After setting, press "F10" key to save and exit, System boot from CD-ROM or U disk.



## **Copyright**

This motherboard manual belongs to Colorful Technology and Development CO, LTD. No one is permitted to copy, change, or translate without our written permission.

## **Disclaimer**

The products name we mentioned in this manual is only for identifying, all of the brands belong to other company.

The registered trademarks of IBM, VGA and PS/2 belong to International Business Machines.

The registered trademarks of Intel, Pentium, Pentium II, Celeron, Pentium III and Pentium 4 belong to Intel.

The registered trademark of Athlon belongs to Advanced Micro Devices, Inc.

The registered trademarks of Microsoft, MS-DOS, Windows 95/98/NT, Windows2000/XP etc. belong to Microsoft.

All of the trademarks in this manual have been registered.

## Copyright Notice

The material in this document is the intellectual property of Colorful Technology and Development CO, LTD. We take every care in the preparation of this document, but no guarantee is given as to the correctness of its contents. Our products are under continual improvement and we reserve the right to make changes without notice.

### Trademarks

All trademarks in this manual are properties of their respective owners.

- NVIDIA® is registered trademark of NVIDIA Corporation.
- AMD® is registered trademarks of AMD Corporation.
- Intel® is registered trademarks of Intel Corporation.
- Windows® is registered trademarks of Microsoft Corporation.
- AMI® is registered trademark of American Megatrends Inc.
- Award® is a registered trademark of Phoenix Technologies Ltd.
- Realtek® is registered trademark of Realtek Semiconductor Corporation.
- JMicron® is registered trademark of JMicron Technology Corporation.
- ASMedia® is registered trademark of ASMedia Technology Inc.

## Technical Support

If a problem arises with your system and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Or our engineer, send the follow information to us!

Customer name \_\_\_\_\_

Purchase date \_\_\_\_\_

Contacts \_\_\_\_\_

Contact phone \_\_\_\_\_

Contact address \_\_\_\_\_

Product model \_\_\_\_\_

Product SN \_\_\_\_\_

Dealer name \_\_\_\_\_

Dealer phone \_\_\_\_\_

Dealer address \_\_\_\_\_

Website: [www.colorful.cn](http://www.colorful.cn)

Service hotline: +86400-678-5866