


Karman vortex flow switch

PALDRA Instructions manual

PSW-5L/30L

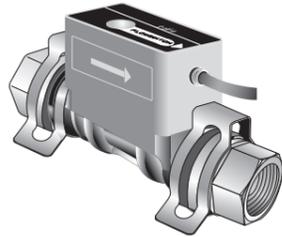

Regal Joint Co., Ltd.

1-9-49 Onodai Minami-ku Sagami-hara-shi, Kanagawa, Japan 252-0331

TEL +81-(0)42-756 7411 (Sales)
FAX +81-(0)42-752 2004 (Toll Free)
URL <http://www.rgl.co.jp>

Features

Karman vortex flow switch PSW-5L/30L is the new series of flow switch to measure flow rate, with simple functions and reasonable price. LED turns red from green if flow deviates from the set value. Due to compact construction it can be installed in narrow space and simple structure resulting easy maintenance, easy installation and de-installation.

Before using our product.

- Please read carefully the instructions before you use our product.
- Please follow the procedures, conditions and cautions as per the instructions.

Safety information

	Warning Mis-handling could cause injury or even death at drastic conditions.		Never do it.
	caution Mis-handling could cause disability, fire or other damages to the building or properties.		Do it only with following instructions.

Warning

Unusual or faulty conditions

- ⚠ If you continue using our product under the unusual or faulty connections or conditions like as smoking, foul smell, unstable and malfunction, it could cause fire or accident. Cut the power supply immediately and contact to us. Do not try to repair the product yourself.

Working environments

- ⊘ In the humid or dewing environment, it could cause accident or damage because of moisture.
- ⊘ In the vibration, impulsion or pulsation environment, it could cause malfunction, some accident or damage.
- ⊘ Our products are NOT explosion-proof. Do not use in the dangerous environment with flammable, explosive, or corrosive gas.
- ⊘ Do not use outside. This product is only for inside.
- ⚠ Installation in high temperature environment as near to heat instruments could cause some accident or damage as the heat instrument will led the temp rise inside the flow meter. Please use our product as instructed in the manual.

caution

Cables

- ⊘ Please do not put heavy objects on the cables or pull the cables from flow meter body, it could cause accident or damage.
- ⚠ Please follow the Instructions for "wiring", "Output signal" otherwise, it could cause accident or damages.

Working environments

- ⊘ Magnetic power, electromagnetic wave, radioactive ray or ultraviolet rays could cause accident or damage.
- ⊘ Electric corrosion or static electricity could cause accident or damages.
- ⊘ In electrically noisy environments as like around high-frequency power source could cause accident or damages.
- ⚠ Install the filter upper flow/Inlet to clear some piece of metal or small objects if needed.
- ⚠ Remove the bubbles in the fluid for accurate measurement of flow rate.
- ⚠ Please ground the connection pipe to the power supply GND.

Packaging and carrying.

- ⚠ Do not drop. Handle with care otherwise The flow meter could damage or cause malfunctioning.

Installations

- ⚠ Mind your fingers while plumbing a sensor or you could get injured.

Maintenance


- ⊘ Contact us for overhauling, adjusting or repairing. Please make sure not to touch an electronic substrate inside of flow meter.
- ⚠ Only a person who has technical knowledge and experiences could do plumbing, wiring, maintenance or overhauling.
- ⚠ while installation or maintenance please shut off the power and water supply for your safety.

Others

- ⊘ Please contact us if you received damaged or deformed product.

Configuration and Dimensions

The electric circuit, substrate, is attached on a wetted part of the body which is covered with a cover. You find a rotary switch inside the cover, and a cables for interface on the side.

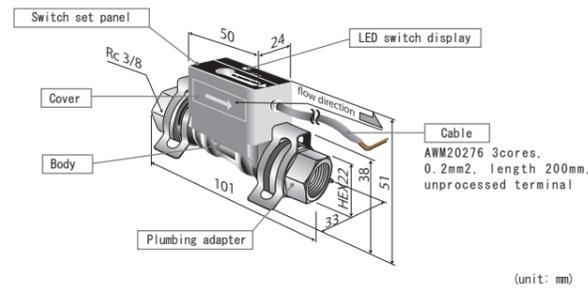


Specifications

This is the basic specification for PSW. Please read them carefully for safe use.

Models	PSW-5L	PSW-30L
Rated flow range	0.5~5.0L /min	5.0~30.0L /min
Fluid	Industrial water, water	
Detecting method	Karman vortex	
Fluid temperature	0~90°C (No freezing, no dewing)	
Ambient temperature	0~50°C (No freezing, no dewing)	
Maximum working pressure	1.0MPa	
Withstanding pressure	1.5MPa (at 20°C)	
Pressure loss (at the maximum flow rate)	46kPa	85kPa
Responsivity	Sampling 0.5s	
*1 power supply	DC24V±10%	
Current consumption	MAX 20mA	
*2 Switch output	Maximum load current	Max. DC 100mA
	Maximum applied voltage	Max. DC 40V
	Output mode	A output
*3 Display	2colors LED	
Certification, regulation	RoHS	
Wetted material	Body PPS, FKM	Adapter SUS304
Adapter size	Rc3/8" Quick fitting	
Weight	155g	

- *1 Voltage more than specified on the table will damage the product.
- *2 Default setting of switch is 0 memory (0L/min) at the time of shipment. (Red LED will be on when there is no water flow)
- *3 GRN: Flow rate > Set value RED: Flow rate < Set value

Wiring (interface)

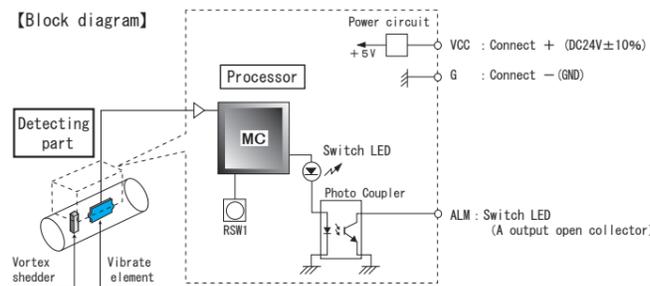

[Cable functions]


Sign	Color	Name	Direction	Characteristic	Output selection	Operation and usage
VCC	Red	Connect+	←	DC24V±10%		Connect +side of power supply. Supply +24V to PSW.
G	Black	Connect-	↔			Connect -side of power supply. It is GND (0V) of PSW.
ALM	White	Switch output	←	Photo Coupler (A)		Alarming signal to equipment. (A) flow rate ≥ alarm value : ON flow rate < alarm value : OFF

※When setting 0L/min, it will be OFF ON, not in the water flow in the water flow detection.

Output signal

Switch output


The diagram below shows how to put a load of switch output. There is no polar character within the range in rating voltage or current.

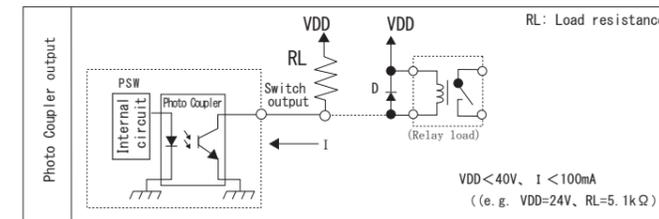

Caution Use relay with internal diode or external diode(D) to prevent damaging Photo Coupler from back electromotive force as above when you use relay load. E.g. V03C(HITACHI)

Procedures

The diagram below shows a control panel on the top of the body

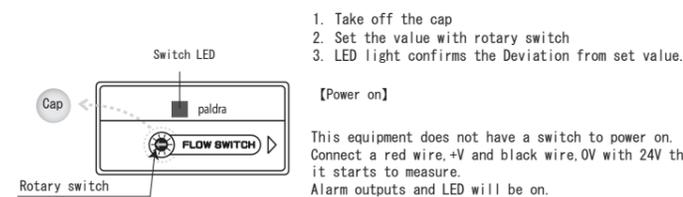


Switch settings

*<table 1> explains definition of switch output and LED.

<table 1>

Switch output and LED		Switch	A
Measuring value	More than set value	GRN	ON
		ON	ON
Less than set value	RED	ON	OFF
		OFF	OFF


* A internal circuit of switch output is Photo Coupler. ON: conduction and OFF: No conduction

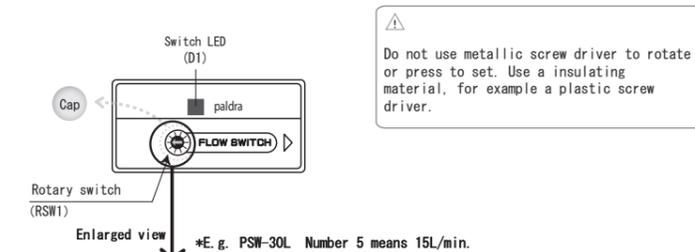

Do not use metallic screw driver to rotate or press to set. Use a insulating material, for example a plastic screw driver.

[Indication of divisions]

Point the arrow towards the setting value

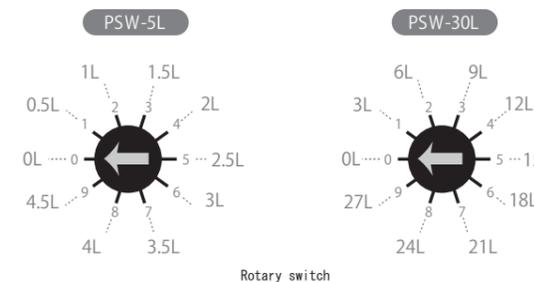

[Flow rate set value diagram]


Memory switch	0	1	2	3	4	5	6	7	8	9
PSW-5L	0	0.5	1	1.5	2	2.5	3	3.5	4	4.5
PSW-30L	0	3	6	9	12	15	18	21	24	27

(L/min)


Connections

※ At the time of shipment adapters and quick fastener has enclosed separately.


- ① Adapter is Rc3/8 female. Keep the adapter hold and screw the fitting.

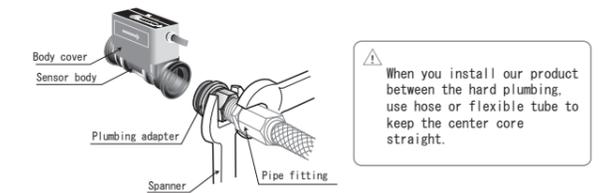

- ② Insert an adapter into a body. There is O ring, P14, around the adapter. Please pay attention to attach properly with no any particle in between

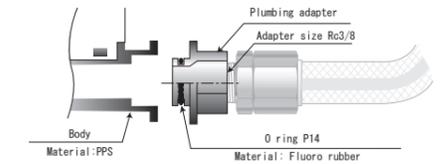

- ③ Put quick fastener on the adapter until the adapters are locked between the gap of the fastener. Make sure it is tightly locked.

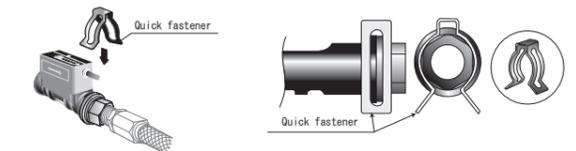

And vice versa.

- ⚠ A straight pipe length needs min. 7D on upper stream and 5D on down stream to keep the accuracy.
- ⚠ Please do not do the plumbing (Put and orifice) sudden changes in the size of piping upstream.
- ⚠ Install valves, bifurcations, gages etc. on down stream.
- D=adapter size, 5L: 4.1mm, 10L: 5.8mm, 30L: 10mm
- ⚠ Please beware of the direct load/pressure on the flow meter (PPS). It could cause leaking or damages.
- ⚠ Do NOT grab or press the cover very hard when you are connecting(plumbing)

Storage

- Please store our products under environments as follows.
 - Where it is NOT exposed to rain or water.
 - Where it is NOT exposed to direct sunshine.
 - Where it is NOT exposed to dust.
 - Where it is NO vibration or impact.
 - Where it is static-free.
 - Where ambient environment is controlled between 0-50 degree Celsius without dewing and freezing.
- Please store our products as you received.

Warranty and disclaimer

- We are not responsible regarding the accident that occurred from the incorrect use of our products or possible lack of information in this document.
- Warranty period of our product is one year from the received date of the product(s).
- If the claimed defect of specifications or materials in the period of the warranty are verified with a document, we will replace free of the product(s). This warranty covers only our products. This warranty does not cover direct or/and indirect damages like lost, damages or injurers etc. caused by defected products.
- We supply a replacement on request. And an inspection of the equipment does not disclose any defect causing by us, the replacement will be charged.
- *The replacement is the same product as we sold but we would supply a different product for certain reasons.
- *It refers the case which we do not have any responsibility.
 - In use out of non-compliance regarding this instruction manual.
 - Negligence in use.
 - Disassembling or conversion of our products.

About instructions manual

- It is not allowed to reprint or reproduce a part or full instruction manual without any prior permission by us.
- All the contents of instruction manual are correct at the date of publication and are subjected to change without notice. Please save the latest issue of our products.
- The contents of the outline and specification of the flow sensor in this operating manual has followed as per the standards. Care must be carried out properly while using sensor with a proper lay-out and consideration against external condition.
- Please contact us if you acknowledge any mistakes or unlisted information in this instruction manual.

*The design, dimensions and specifications of the product in the catalog were correct at the date of publication and are subjected to change without notice.

Produced by **Regal Joint Co., Ltd.**

1-9-49 Onodai Minami-ku Sagami-hara-shi, Kanagawa, Japan 252-0331

TEL +81-(0)42-756 7411 (Sales)

FAX +81-(0)42-752 2004 (Toll Free)

URL <http://www.rgl.co.jp>

5nd issue: June 2018